


THIS GAME IS EQUIPPED WITH THE NEW PUSH-PULL FRONT MOULDING LOCKING UNIT

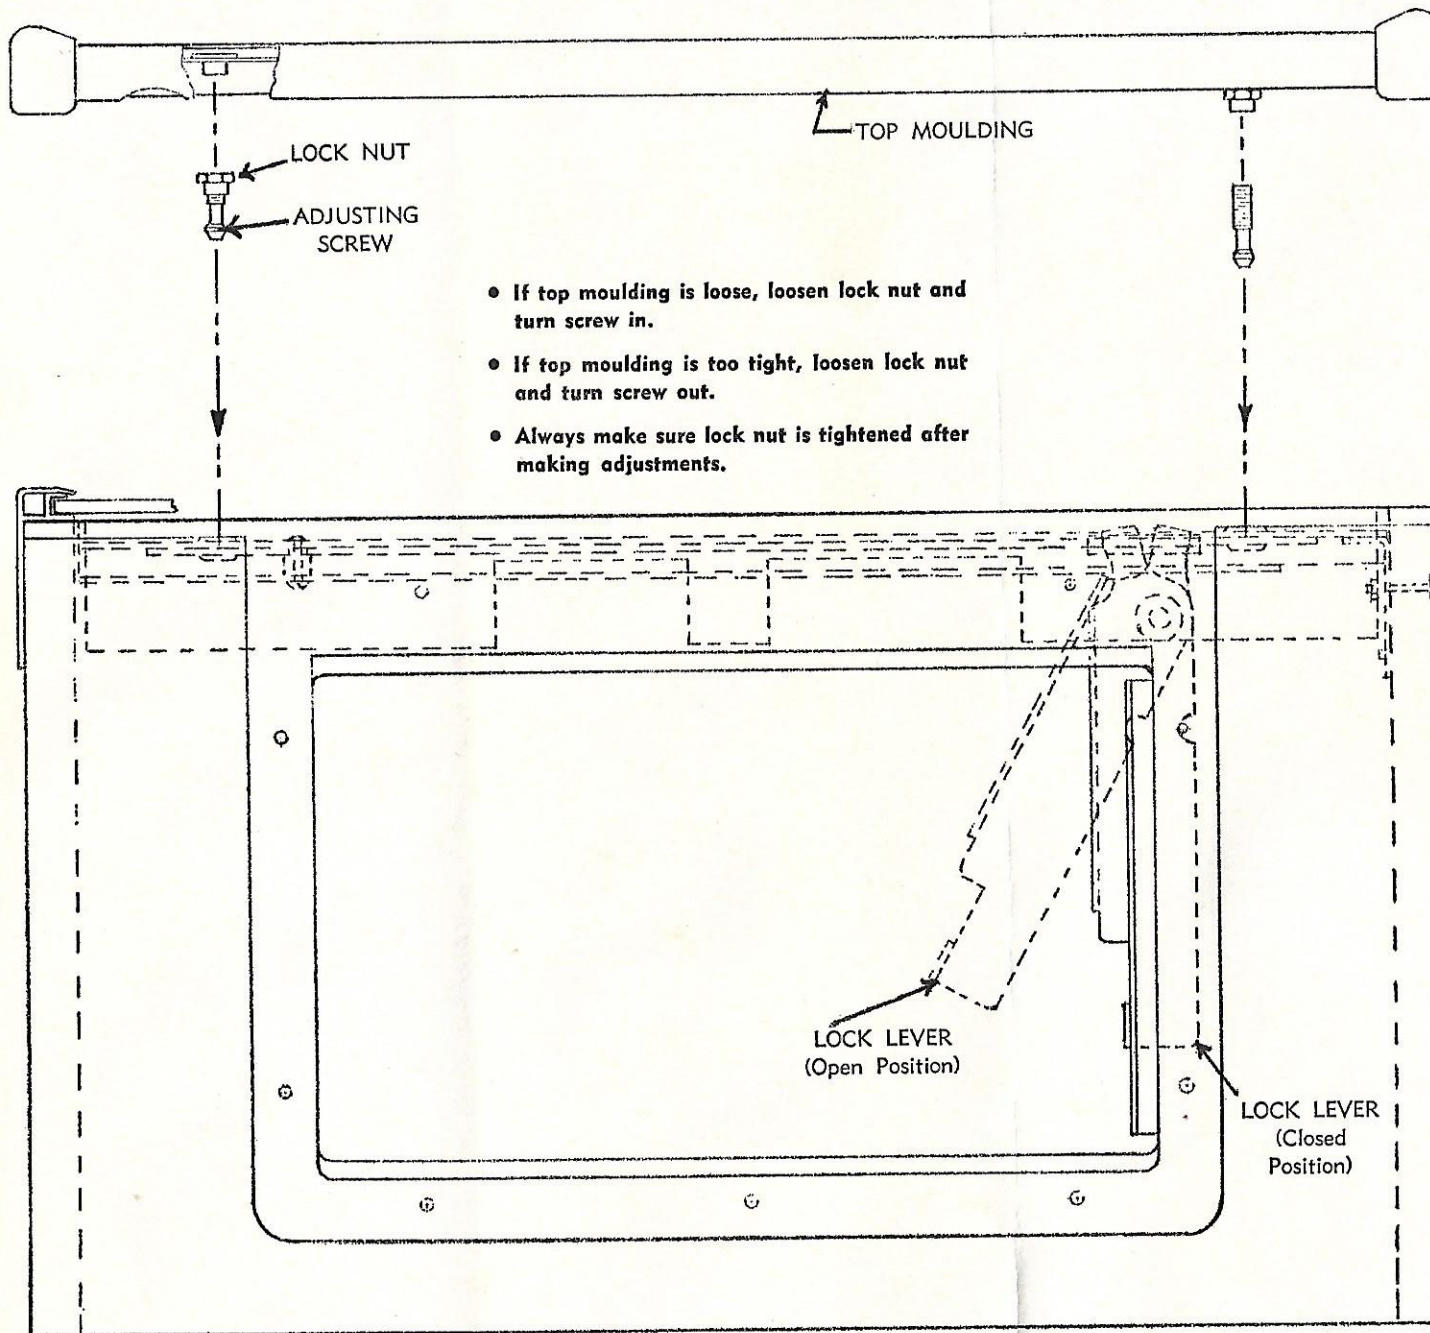


- If top moulding is loose, loosen lock nut and turn screw in.
- If top moulding is too tight, loosen lock nut and turn screw out.
- Always make sure lock nut is tightened after making adjustments.

INSTRUCTIONS TO REMOVE TOP MOULDING

- Open front door of cabinet and pull lock lever to open position.
- Grasp ends and lift top moulding from cabinet.

TO REPLACE TOP MOULDING

- Make certain lock lever is in open position.
- Align screws with corresponding holes.
DO NOT FORCE LOCK LEVER
- Make sure that top moulding is fully seated before attempting to lock.

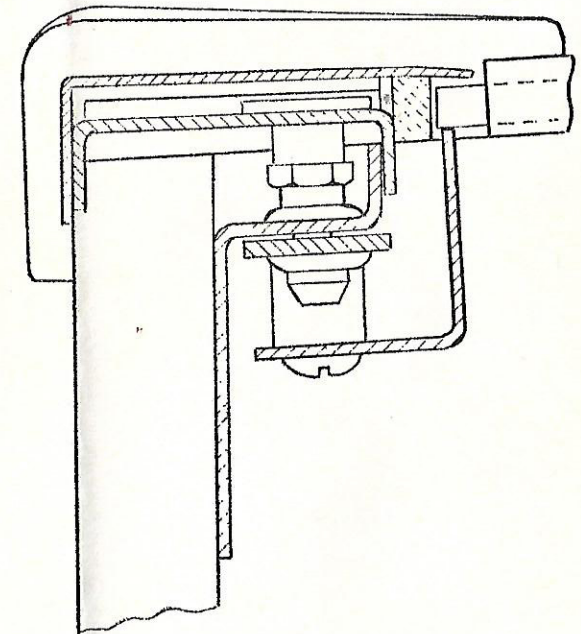

CROSS SECTION VIEW
SHOWING TOP MOULDING
IN SEATED POSITION.

CABINET FRONT