



GRAND PRODUCTS, INC.

775 NICHOLAS BOULEVARD

ELK GROVE VILLAGE, ILLINOIS 60007

(312) 593-2770

March 25, 1986

MODIFICATION PROCEEDURE FOR AS-2518-35

MICROPROCESSOR MOD'S


Board Revision - 35

Cut trace (rear) U-11	Fig. 2
Cut trace to U14 pin 3	Fig. 2
Cut trace to U5 pin 20	Fig. 1
Connect U9 23 to U18 11	Fig. 2
Connect U9 22 to U14 3	Fig. 2
Connect E33 to E35	Fig. 1
Connect E12 to E33	Fig. 1
Connect E7 to E8	Fig. 1
Connect E31 to E32	Fig. 1
Connect E13 to E15	Fig. 1
Connect E13A to E9	Fig. 1
Connect E11 to E29	Fig. 1
Connect E25 to U5 20 thru feed hole	

ATTENTION:

REMOVE ALL STRAPPING JUMPERS LABELED "E"
NOT SHOWN ABOVE

FIGURE I

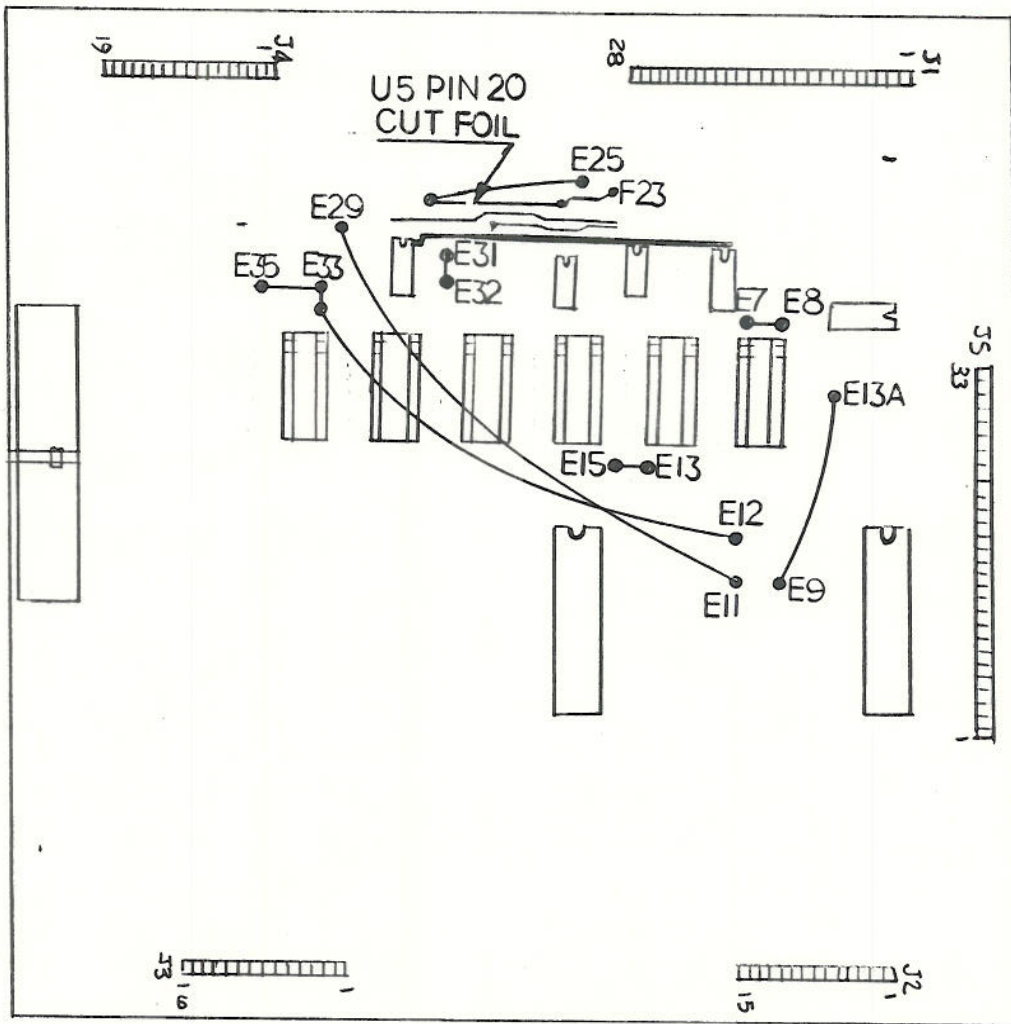

MPU IBOARD AS2518-35

FIG. #2

PAD JUMPERS
AS
SHOWN

CUT
TRACE U11

REAR U11
CUT
TRACE

9