


PRICE LIST
SPINNER UNIT and PARTS
Arranged in Numerical Order

Part No.	Description	Price
1 A 4033-L	Plate Mounting Bracket	.70
1 A 4033-R	Plate Mounting Bracket	.70
1 B 4034	Motor Mounting Plate	2.00
2 A 2330	Spacer	.16
2 A 2983	Roller	.10
2 A 3183	Disc Spacer	.08
2 A 3322	Mounting Spacer	.35
3 A 6001-5	Plastic Post	.17
14 A 7807	Spinner Motor (60 Cycle - 24 Volt)	14.00
14 A 7808	Spinner Motor (50 Cycle - 24 Volt)	16.00
20 A 6520	3/4" Dia. Steel Ball	.25
20 A 8715-72	Steel Washer	.02
20 A 8846-1	1/4" Palnut	.08
24 A 6406	Lite Socket	.12
24 A 6549	#44 Lite Bulb	.14
30 C 320-10	Screened Top Plastic	9.20
30 C 320-11	Screened Disc Plastic	8.60
B 6615	Outer Shell Assembly	4.80
B 6616	Ball Retainer Assembly	5.10
A 6618	Collector Disc Assembly	9.30
B 6621	Spinner Plate & Hub Assembly	6.40
A 6819-7	Terminal Strip Assembly	.35
D 6836	Complete Spinner Unit	70.00
SW. 01 A	Collector Switch	.30
SW. 01 M	Scoring Switch	.30

COMPLETE SPINNER UNIT
WITH MOTOR
D-6836
AS USED ON "A-GO-GO"

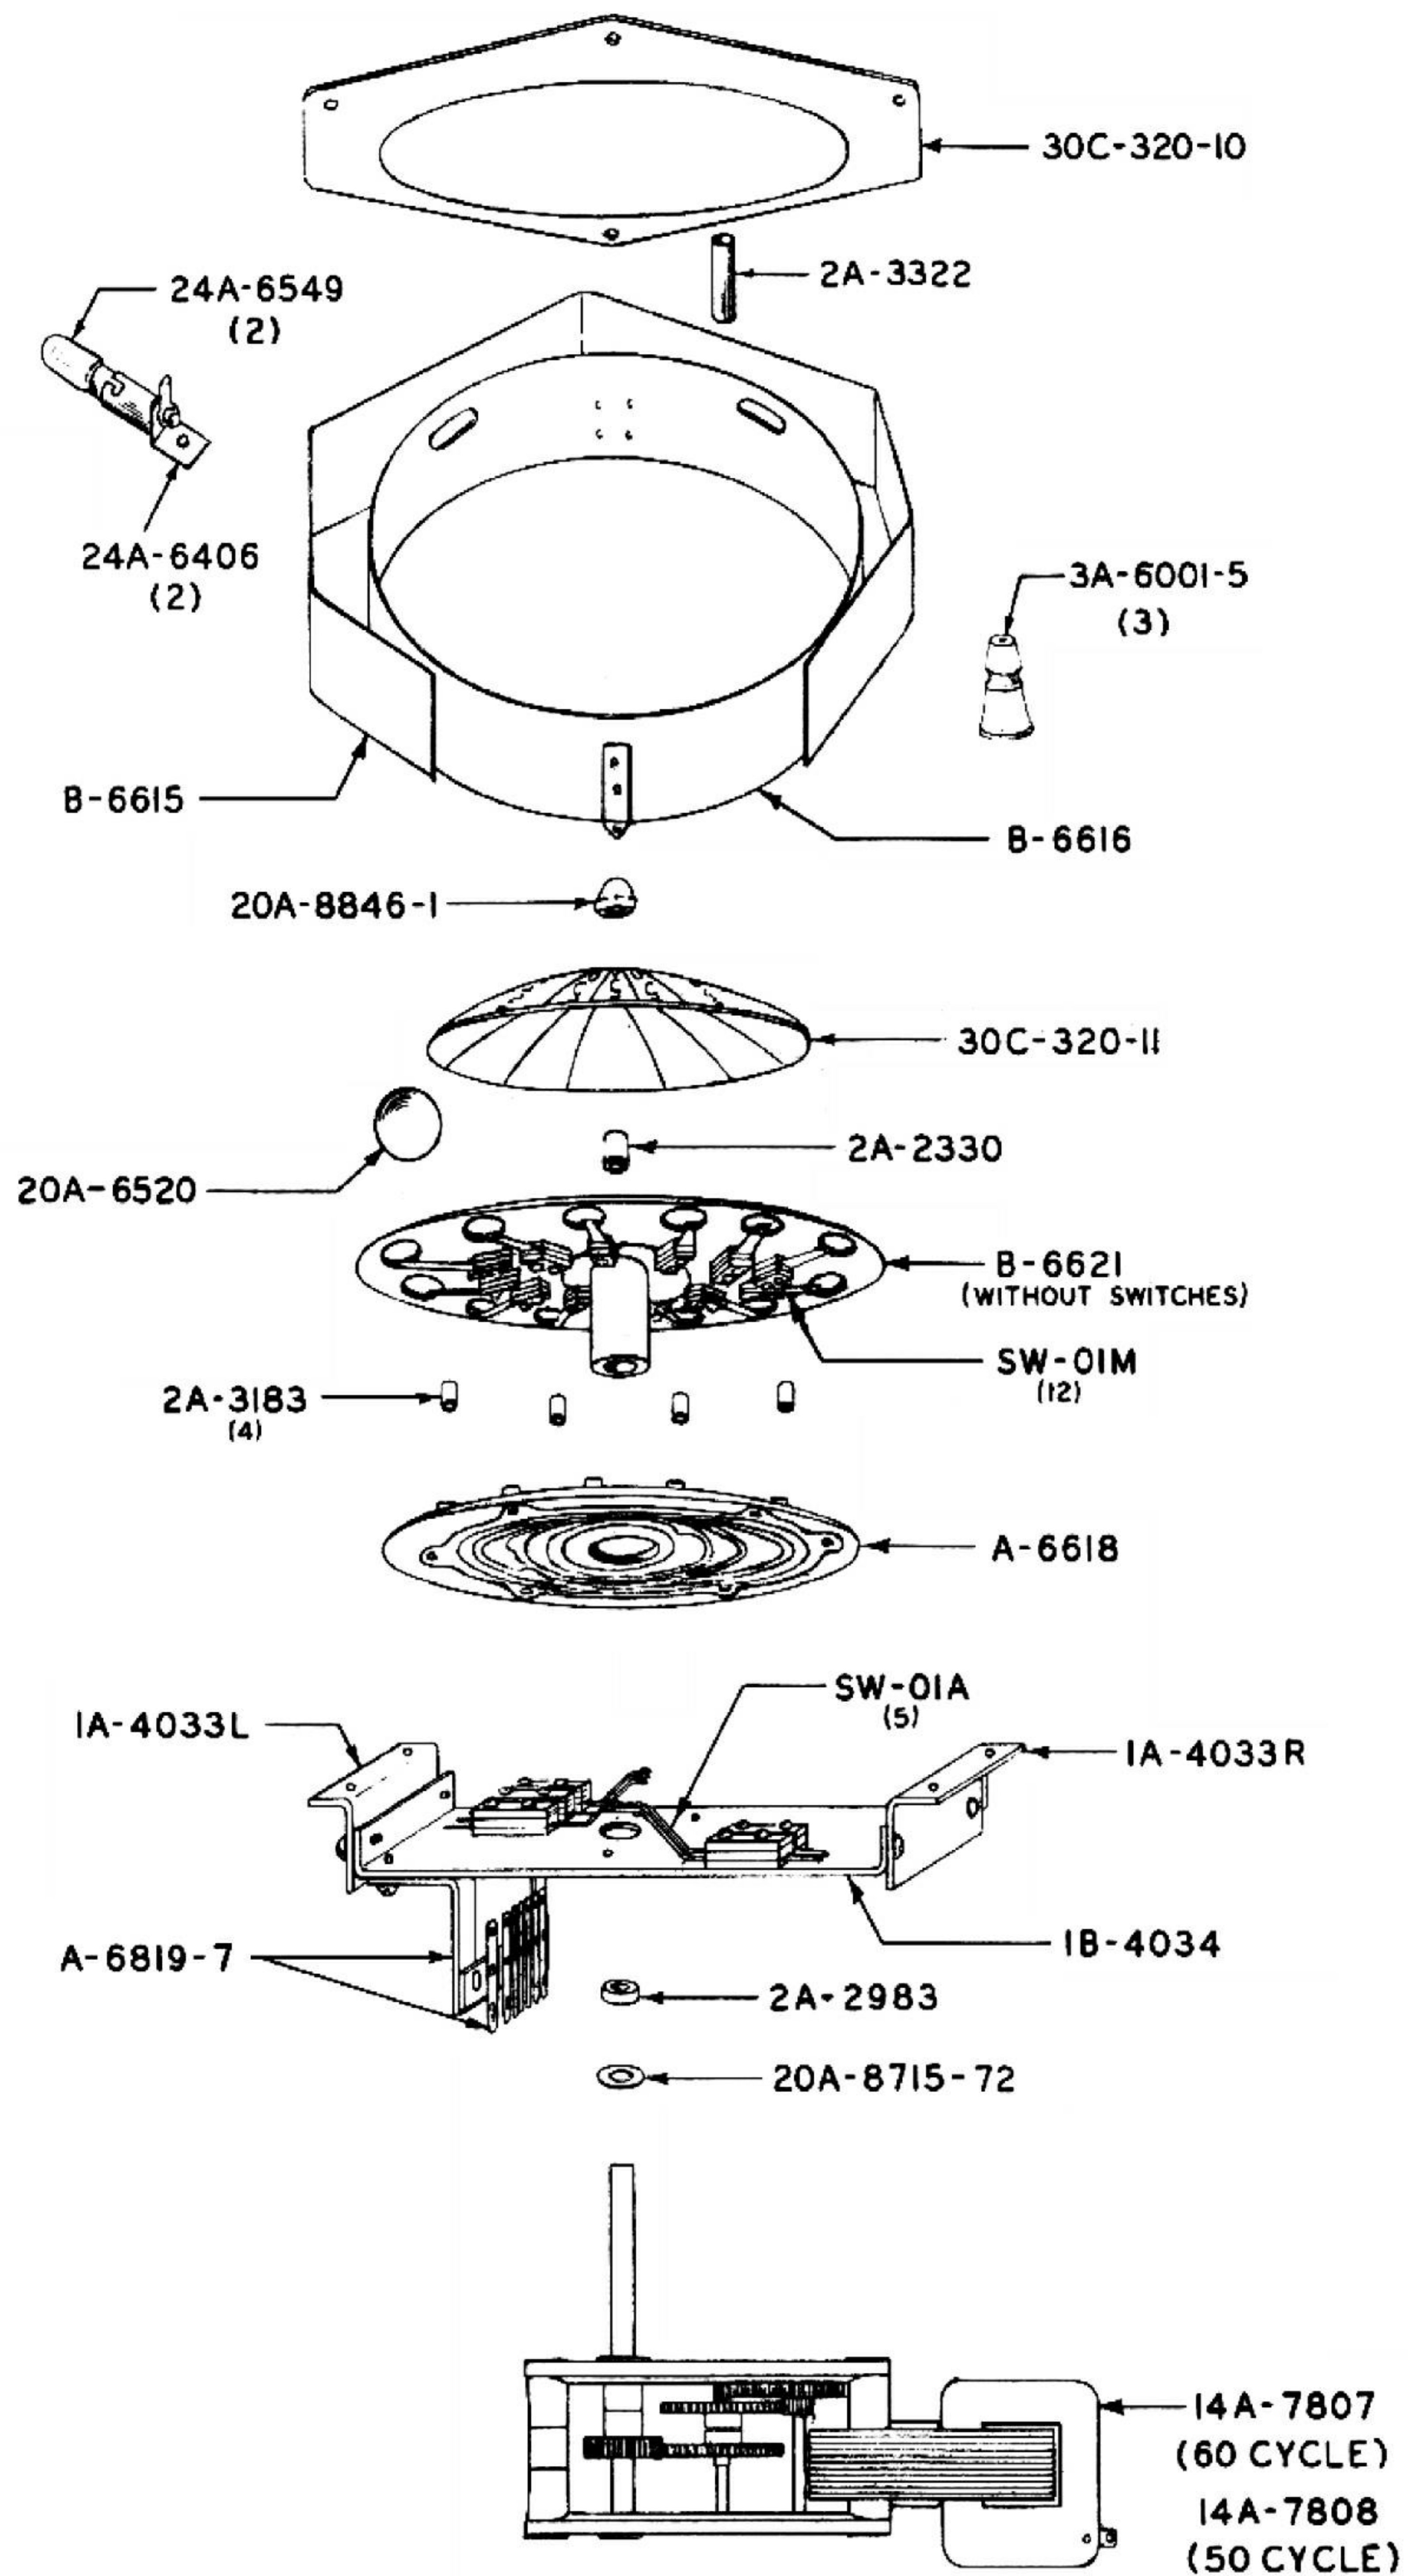


INSTRUCTIONS FOR CONVERTING SLUG REJECTORS TO 2 COIN PLAY OR 1 COIN PLAY


PART NO. 9C-8701 5-10-25¢

COIN ACCEPTORS CHUTE


2 COIN PLAY

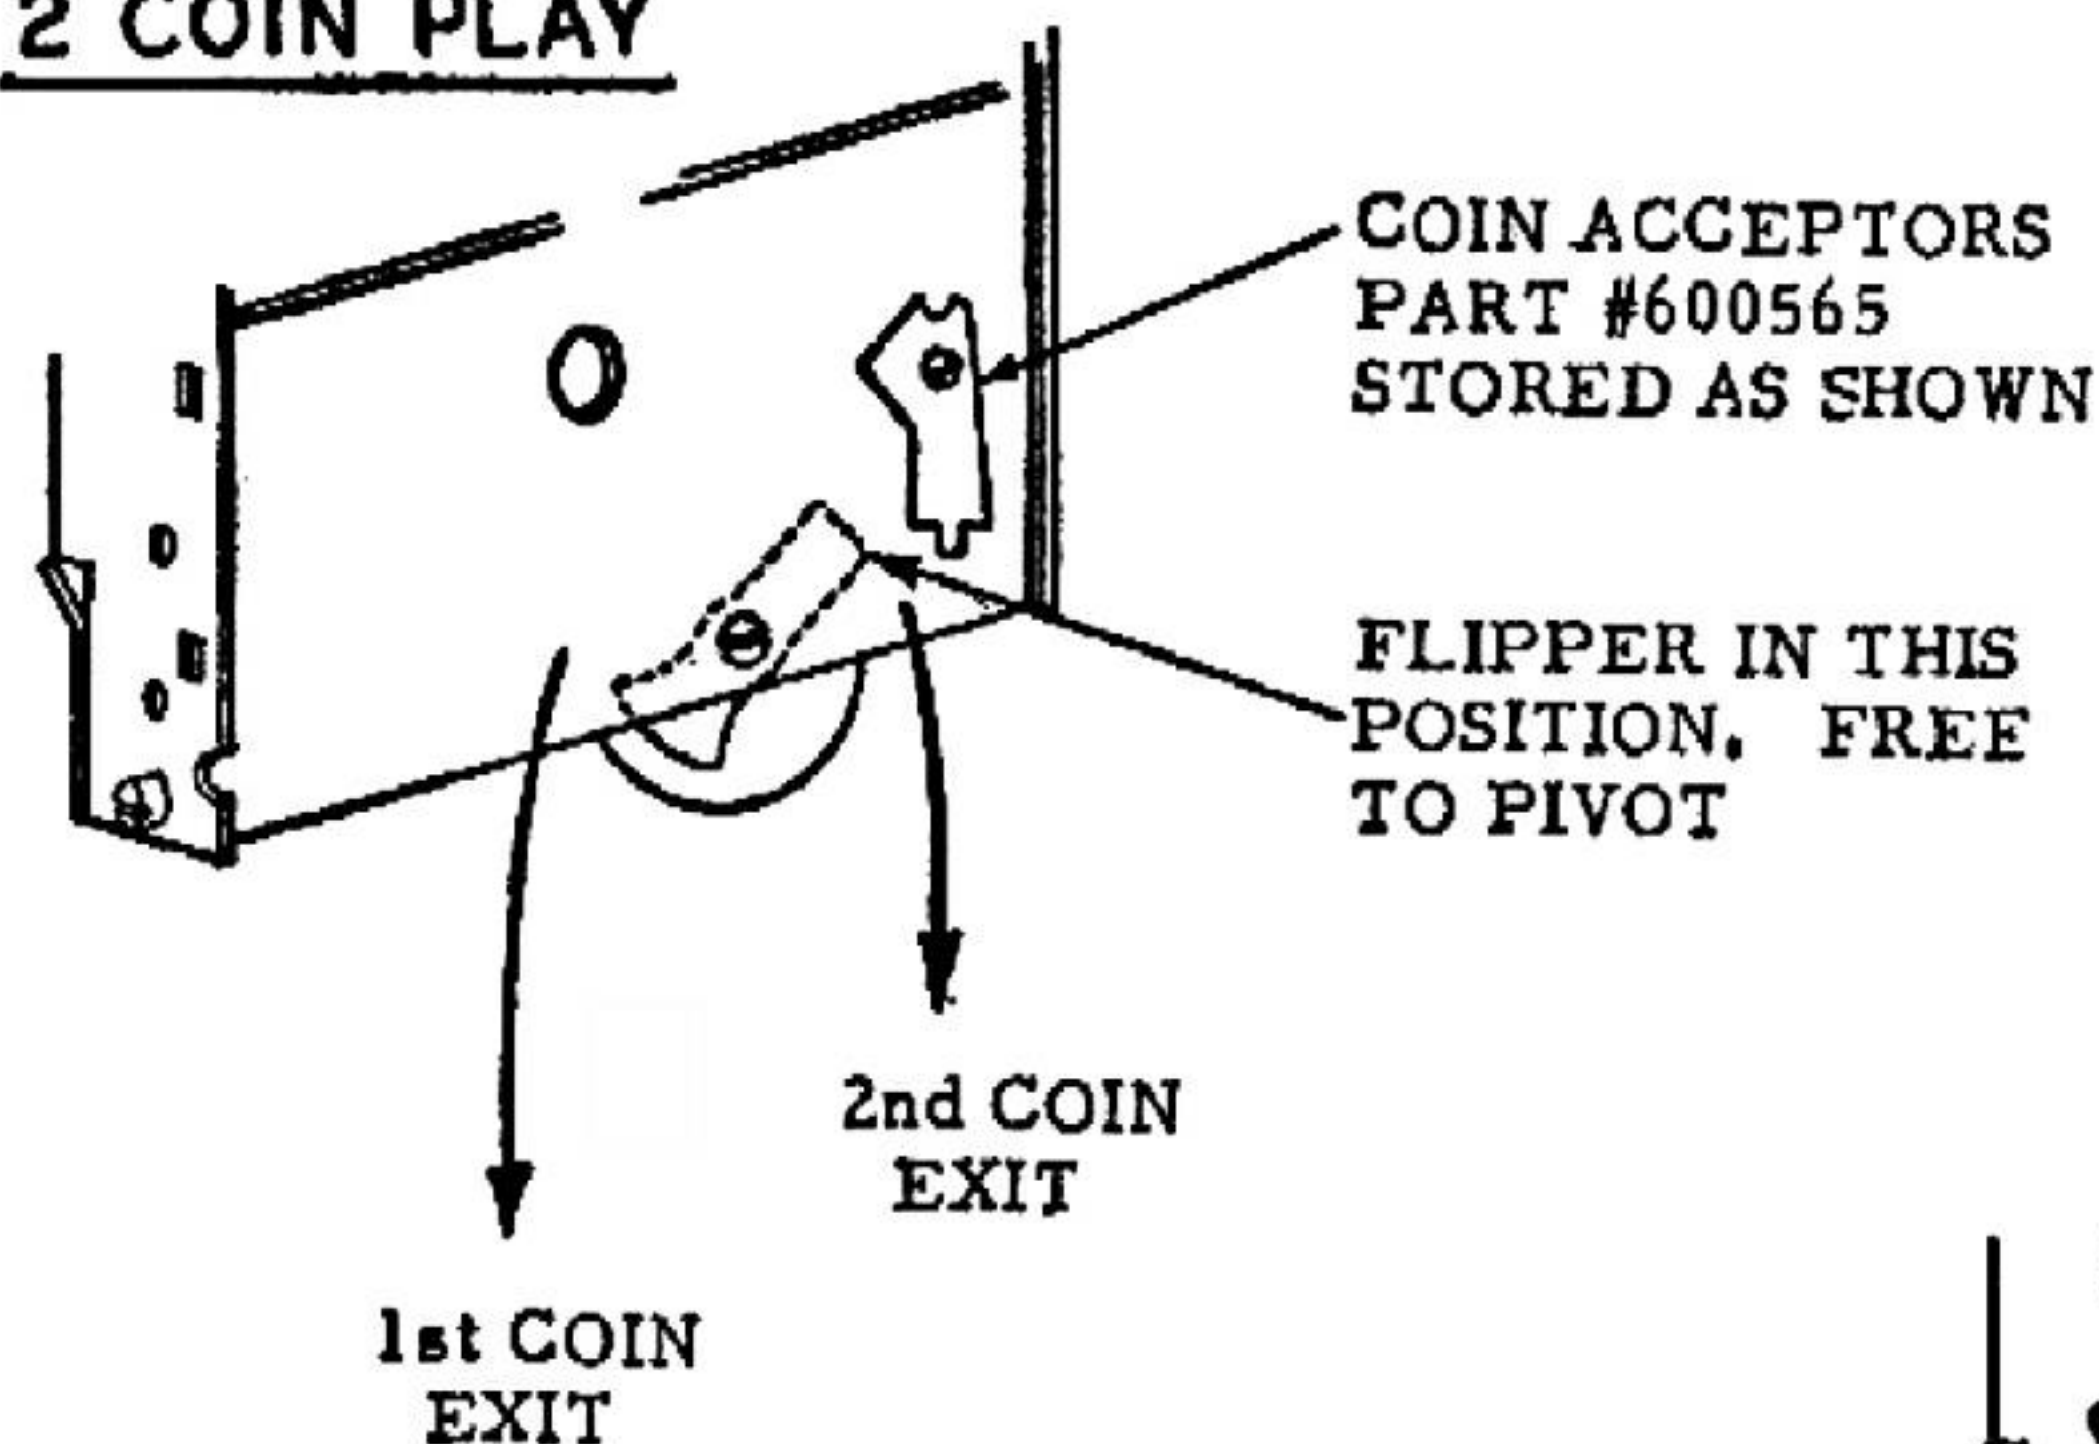


1 COIN PLAY

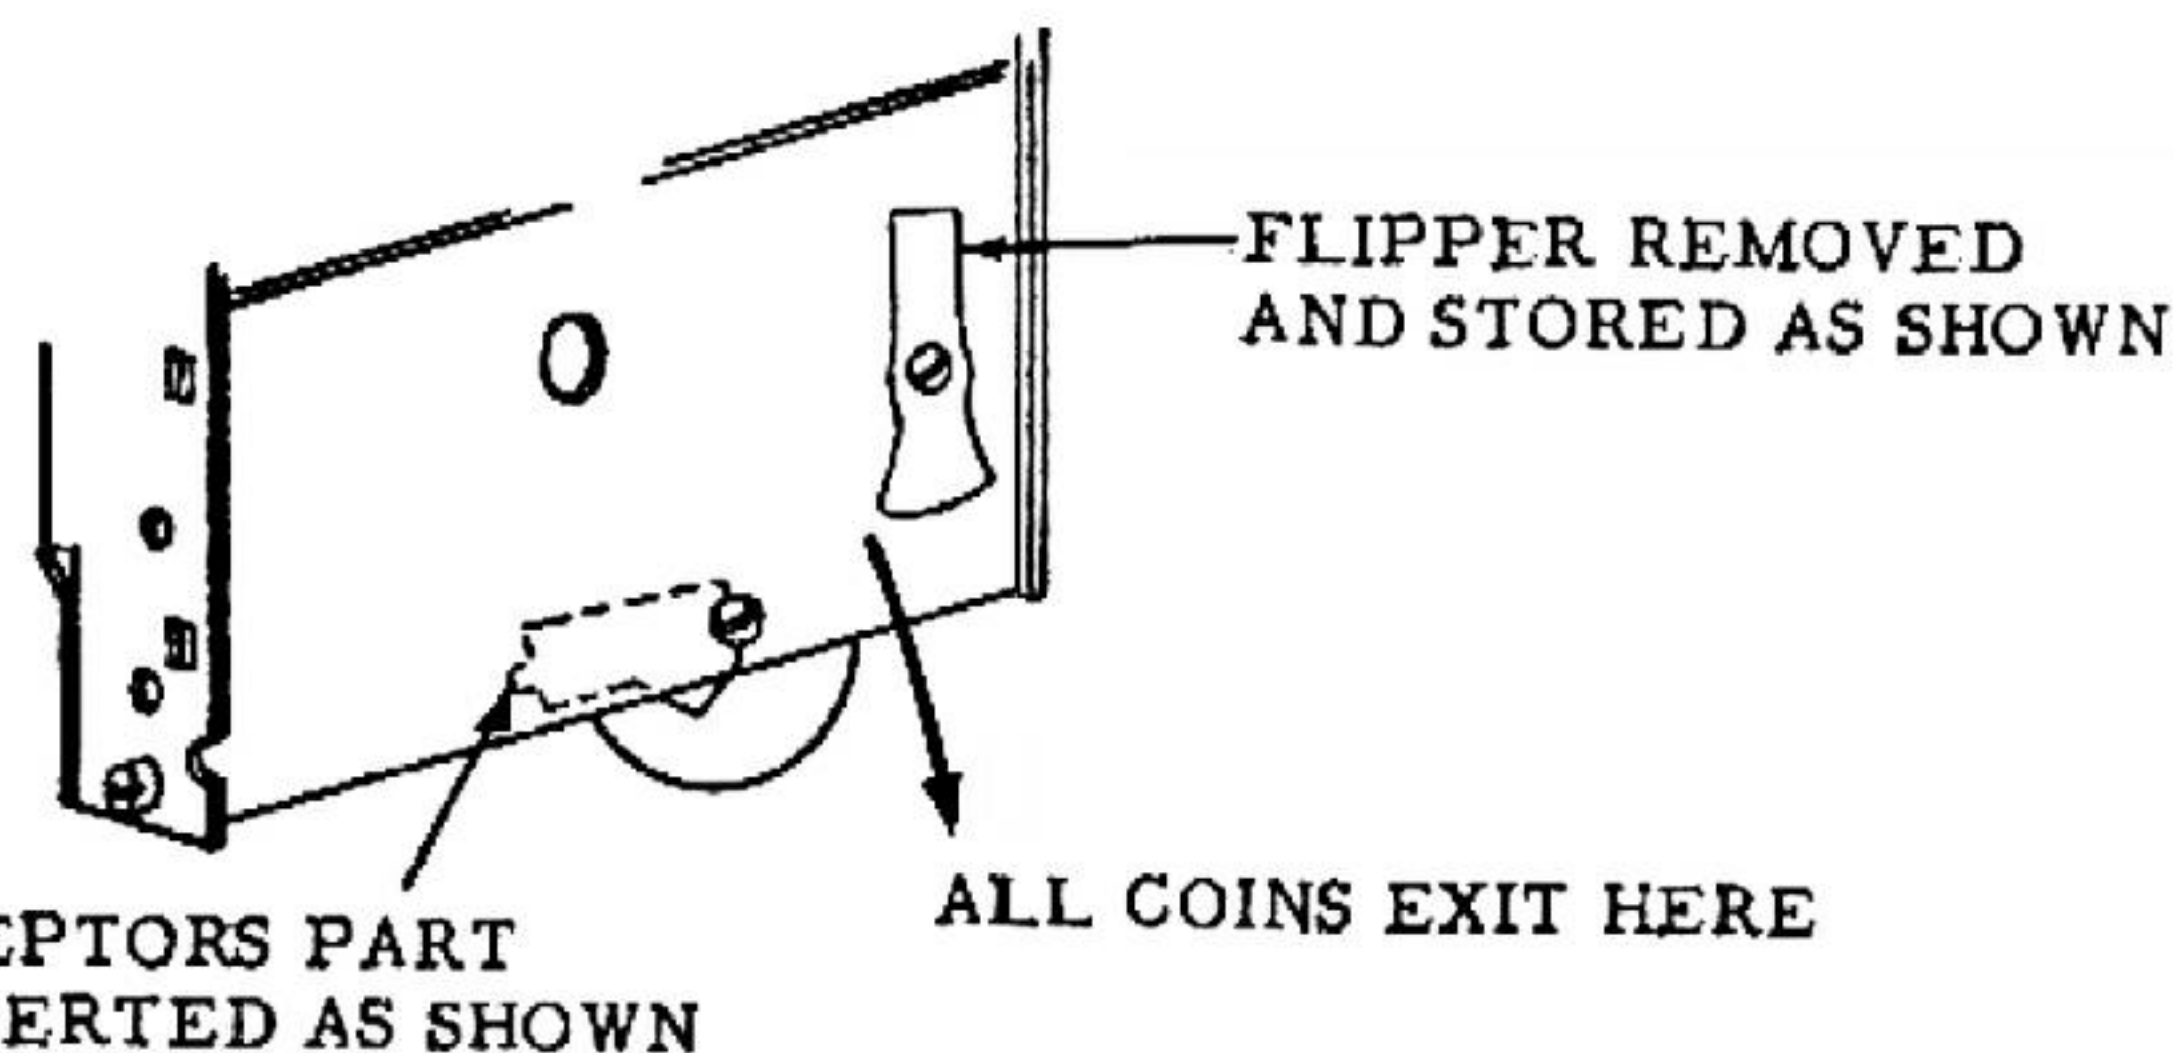

2 COIN PLAY

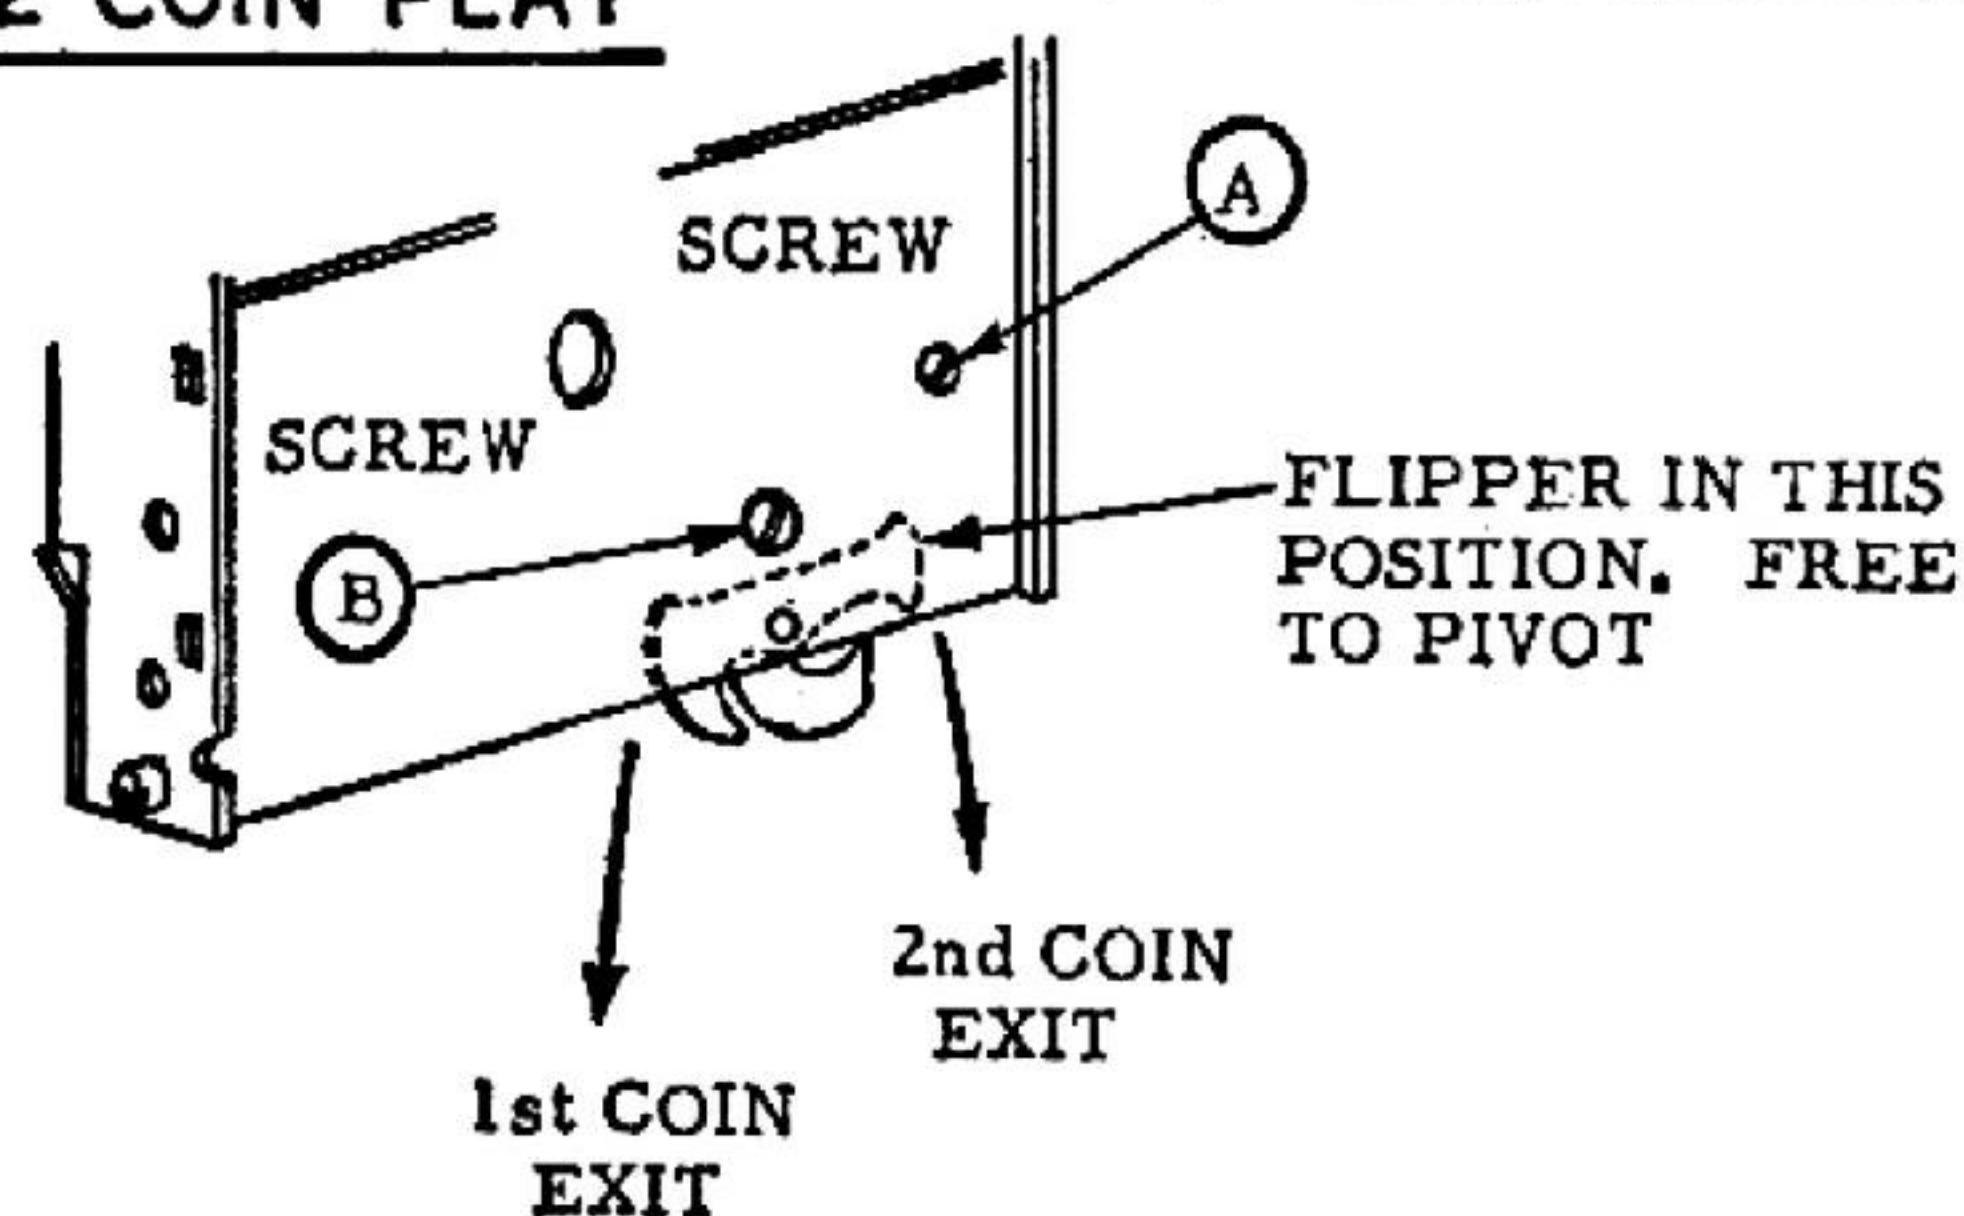

1 COIN PLAY

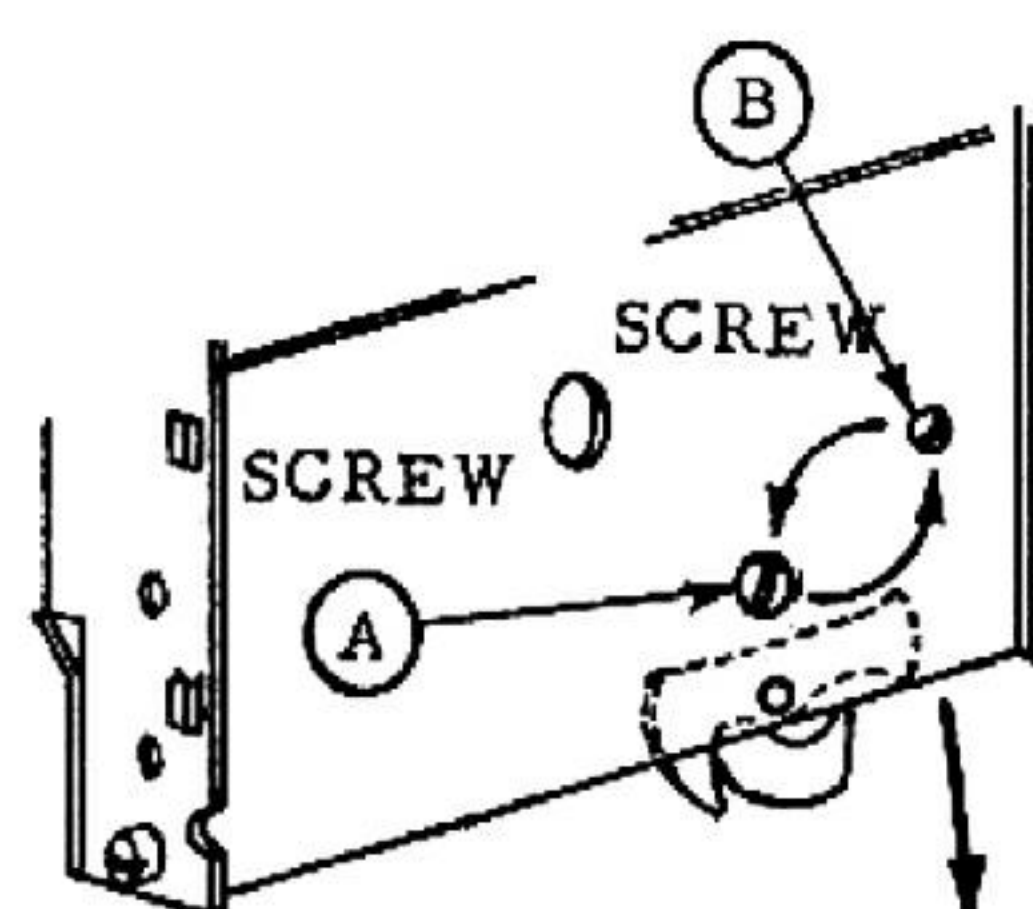

1. REMOVE SCREWS A & B AND REPLACE THEM AS SHOWN.
2. SET THE FLIPPER TO POSITION AS SHOWN.

ALL COINS EXIT HERE

COIN TRIP SWITCH ADJUSTMENT

WIRE (A) SHOULD BE IN CONTACT WITH SHAFT (B) WHEN BLADE ADJUSTMENT IS MADE

LONG BLADE SHOULD BE IN CONTACT WITH NYLON SWITCH ACTUATOR AND HAVE A MAXIMUM OVERTRAVEL OF 1/32"

or

USING A GRAM GAUGE, TENSION OF LONG BLADE SHOULD NOT EXCEED 10 GRAMS.

SWITCH ADJUSTMENT

1. FOR SMALL COINS, ADJUST SHORT BLADE SO THAT THE 'GAP' BETWEEN THE SILVER CONTACTS IS .030 TO .045.
2. FOR LARGER & HEAVIER COINS THE 'GAP' SHOULD BE .045 TO .060
3. DO NOT ADJUST 'GAP' CLOSER THAN .030

PLUG ADJUSTMENT

QUARTER - 3 PLAYS

DIME OR 2 NICKELS - 1 PLAY

1. FLIPPER SET FOR 2 COIN PLAY
2. 10¢ ADJUSTMENT ON MECHANISM PANEL
PLUG IN 1 PLAY
3. 25¢ ADJUSTMENT ON MECHANISM PANEL
PLUG IN #3


QUARTER - 5 PLAYS

DIME - 2 PLAYS

NICKEL - 1 PLAY

1. FLIPPER SET FOR 1 COIN PLAY
2. 10¢ ADJUSTMENT - PLUG IN 2 PLAYS
3. 25¢ ADJUSTMENT - PLUG IN #5

CIRCUIT
6 PLAYS FOR 25¢

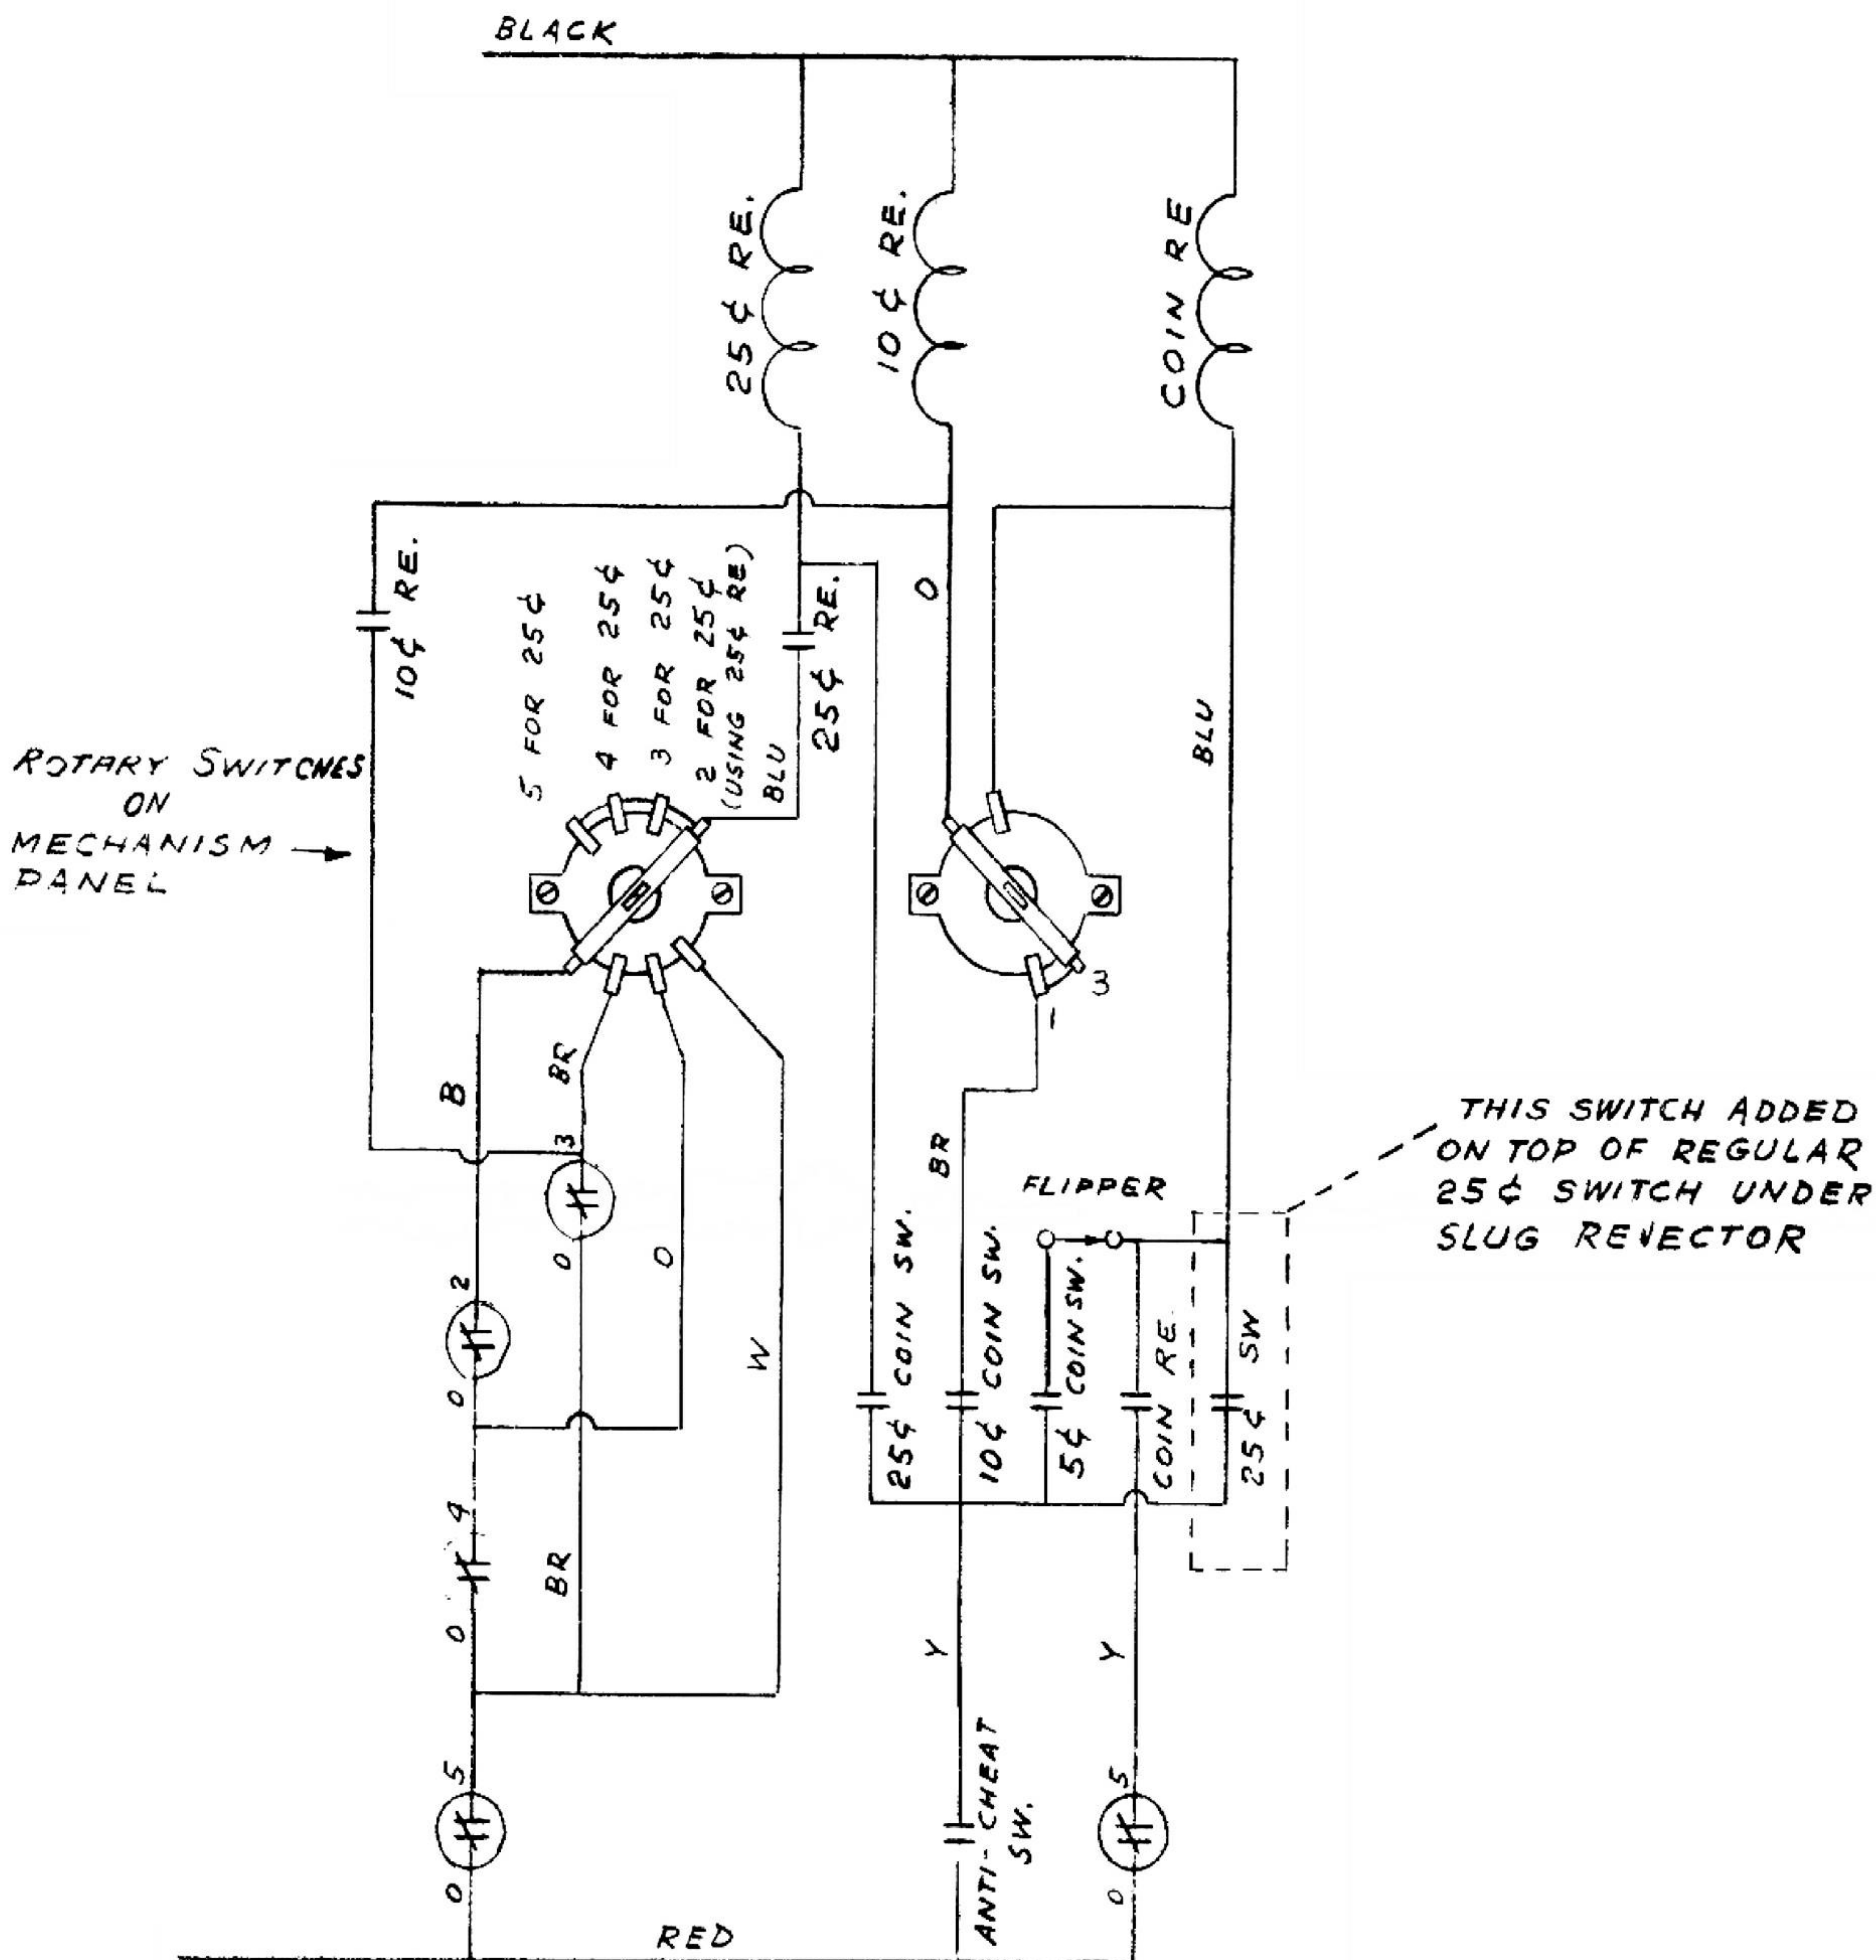

U. S.	GERMANY	FINLAND	JAPAN
25 ¢	1 MARK	1 MARK	¥ 100
10 ¢	50 PFG	50 PENNIA	¥ 50
5 ¢	20 PFG 2 x 10 PFG	20 PENNIA	¥ 20 2 x ¥ 10


"A GO-GO"

ADJUSTMENT SHEET

TO MAKE GAME MORE CONSERVATIVE - MOVE POSTS 3/16", AS SHOWN IN SKETCH. SPOTTING HOLES ARE PROVIDED AND CAN BE SEEN ON REMOVAL OF POSTS.

NO. MATCH ON-OFF SWITCH,

Located in back box. When switch is in 'ON' position, number match will pay 10% or 1 game in 10 for one player matching last number in point score to number that appears on back glass when game is over. In 'OFF' position, match lites will not lite on completion of game.

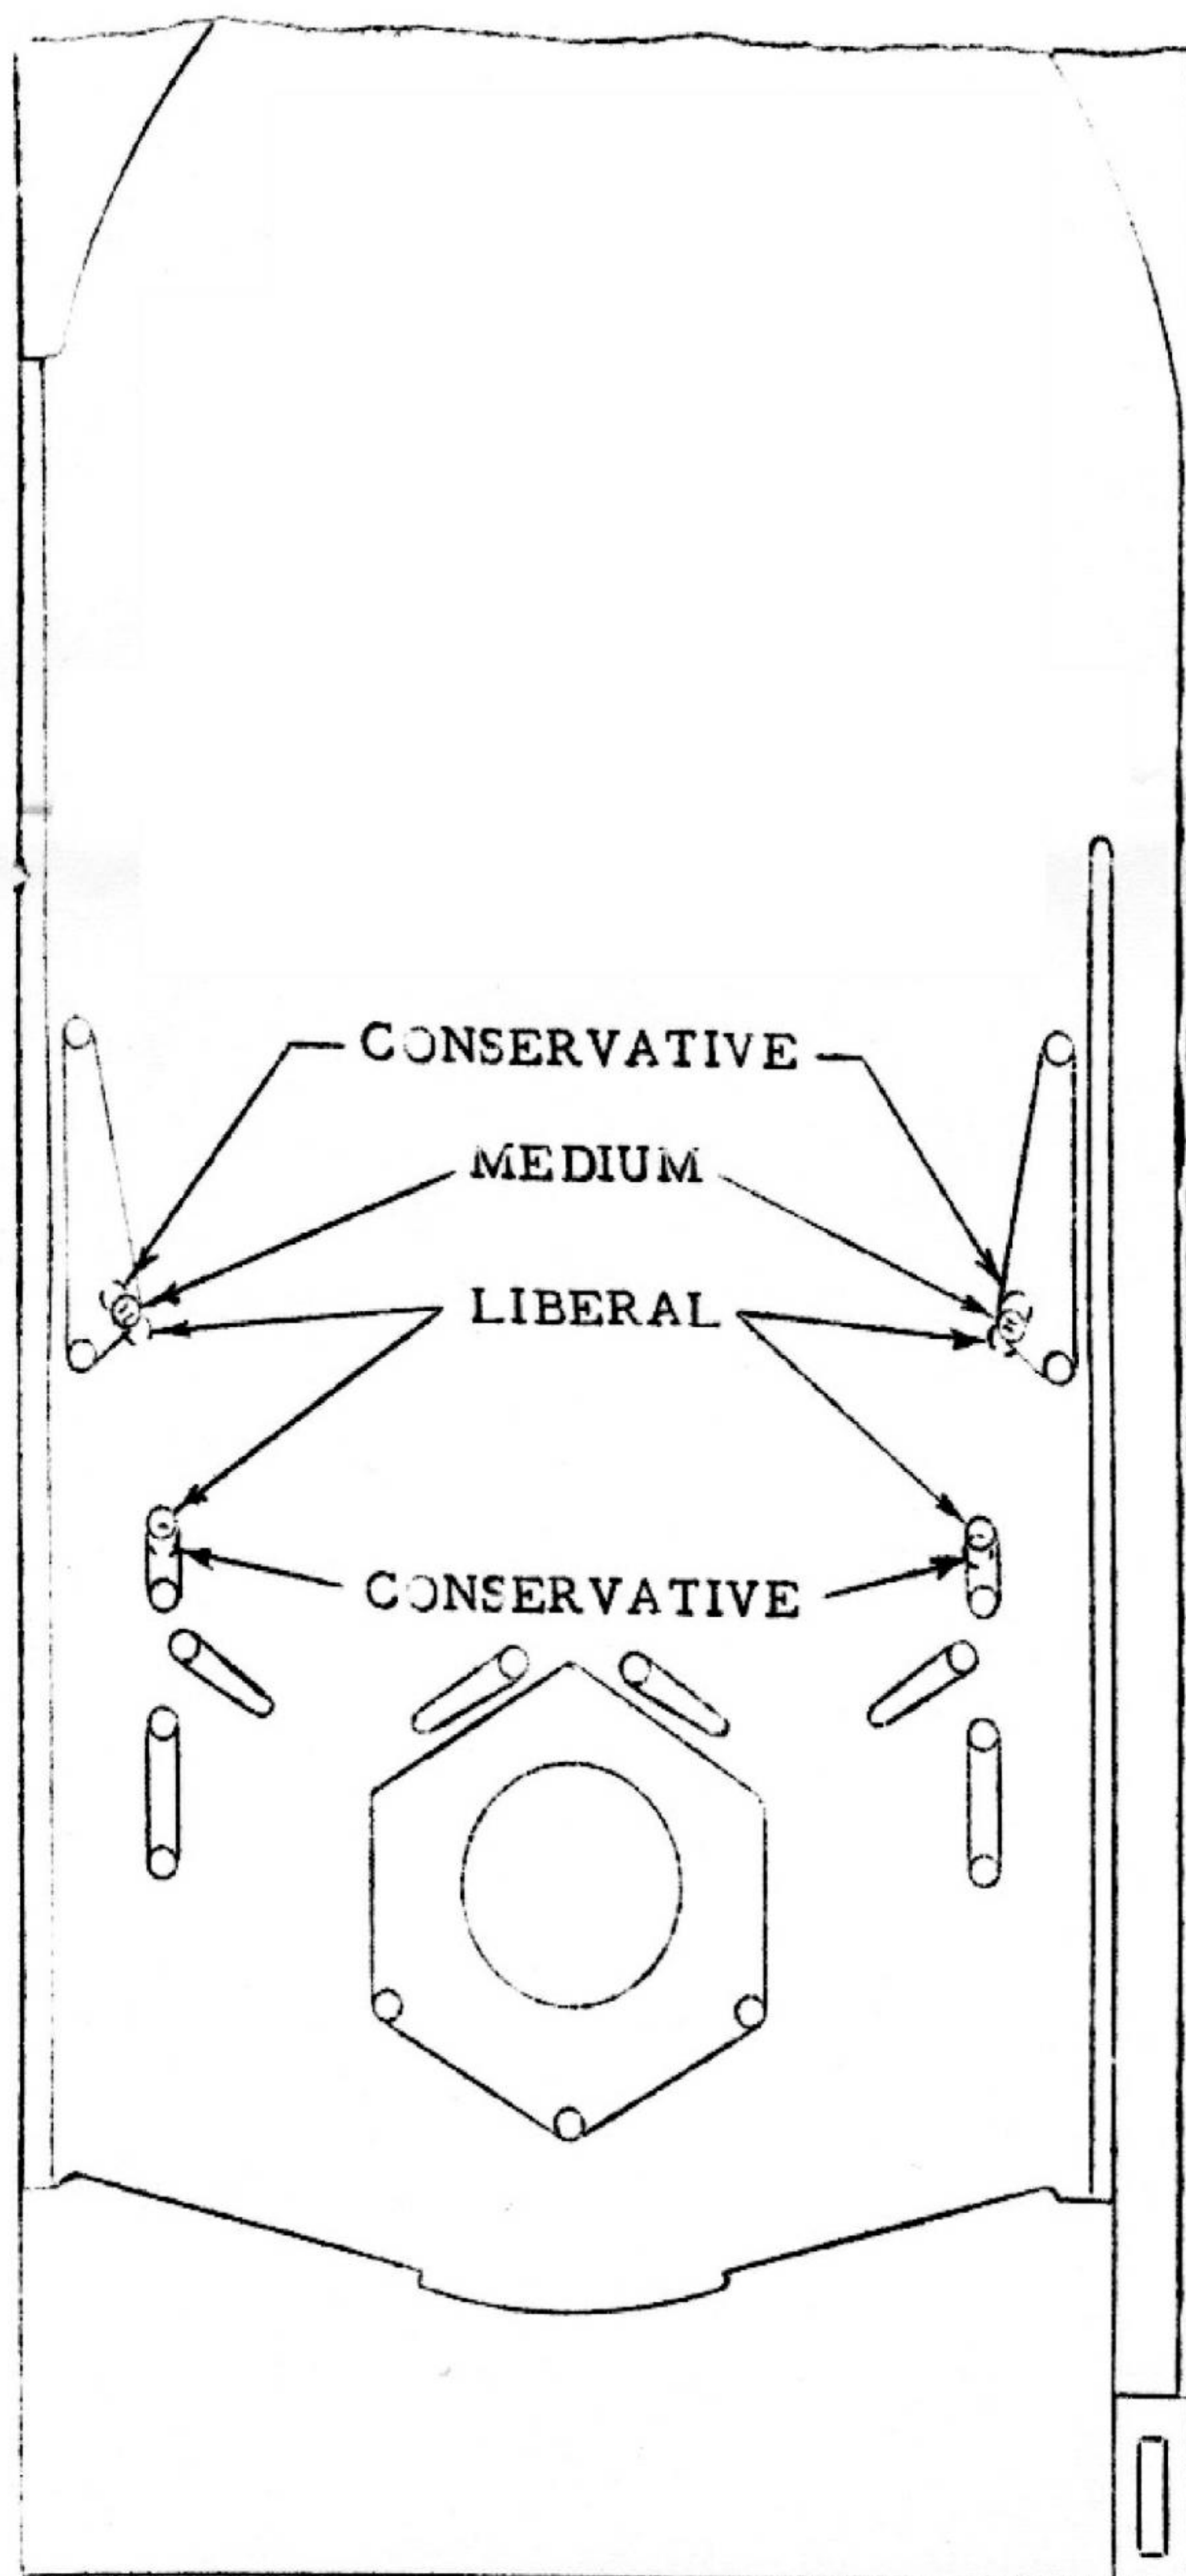

3-5 BALL ADJUSTMENT SWITCH,

located in back box. The switch changes 3 to 5 ball, or vice versa.

10¢ ADJUSTMENT JACK,

located on panel. Will provide 1 or 2 plays for 1 coin.

25¢ ADJUSTMENT JACK,

located on panel. Will provide 2-3-4 or 5 plays for 25¢.

EXTRA BALL ADJUSTMENT,

located on panel, changes game from Replay to Extra Ball Play.

THE POWER TRANSFORMER,

located on panel, is equipped with a secondary tap. If your game is on location with extremely low line voltage, remove lead from lug marked 24 volt and solder to alternate lug marked 'HIGH'. This will boost secondary voltage by approximately 4 volts.

LEG LEVELERS,

are provided for two purposes - 1st to level game on location - 2nd to increase pitch for game percentaging. If it is desired to speed up play or decrease scores, raise rear leg levelers to increase pitch.

Suggested Score Card for 5 Ball Play
#16 C 320-1

3 Ball Play #16 C 320-1A

NOTICE:

THIS GAME OPERATES ON 24 VOLTS. WHEN ORDERING REPLACEMENT TRANSFORMERS, MOTORS, COILS OR METERS --- MAKE SURE TO SPECIFY CORRECT PART NUMBER .

NUMBER	DESCRIPTION	LOCATION
14 A 7805	SCORE MOTOR - 60 CYCLE	MECH. PANEL
14 A 7806	SCORE MOTOR - 50 CYCLE	MECH. PANEL
14 A 7807	SPIN MOTOR - 60 CYCLE	PLAYFIELD
14 A 7808	SPIN MOTOR - 50 CYCLE	PLAYFIELD
15 A 6771	TRANSFORMER - 60 CYCLE	MECH. PANEL
15 A 6773	TRANSFORMER - 50 CYCLE	MECH. PANEL
B 6396	24 VOLT METER (Coil # XM27-675)	MECH. PANEL

SOLENOID COILS

A 22-550	BALL RELEASE COIL PLAYER UNIT STEP UP BONUS UNIT STEP UP MATCH UNIT STEP UP COIN UNIT STEP UP	PLAYFIELD INSERT PLAYFIELD INSERT MECH. PANEL
A 23-600	TIMER UNIT STEP UP BALL COUNT UNIT STEP UP REPLAY UNIT STEP UP	PLAYFIELD MECH. PANEL INSERT
A2-23-750	LARGE BELL KNOCKER	CABINET CABINET
B 26-800	COIN UNIT RESET REPLAY UNIT RESET PLAYER UNIT RESET BALL COUNT UNIT RESET SCORE DRUM UNIT ... (16 req'd.) BONUS UNIT RESET TIMER UNIT RESET	MECH. PANEL INSERT INSERT MECH. PANEL INSERT PLAYFIELD PLAYFIELD
FL 21-375/28-400	FLIPPER COILS ... (4 req'd.)	PLAYFIELD
G 22-550	JET BUMPER COILS ... (3 req'd.)	PLAYFIELD
G 23-750	KICKER COILS ... (2 req'd.) EJECT COIL	PLAYFIELD PLAYFIELD

RELAY COILS

M 29-1000	1st & 2nd RESET RELAY 3rd & 4th RESET RELAY GAME OVER (TRIP)	INSERT INSERT MECH. PANEL
M 29-1100	1 PT. RELAY 10 PT. RELAY 100 PT. RELAY ADVANCE RELAY NO. 1 BUMPER RELAY NO. 2 BUMPER RELAY SPIN RELAY 50 POINT RELAY 200 POINT RELAY 500 POINT RELAY BONUS RELAY	INSERT INSERT INSERT PLAYFIELD PLAYFIELD PLAYFIELD PLAYFIELD PLAYFIELD PLAYFIELD PLAYFIELD
M 30-1400	ON BUMPER RELAY EXTRA BALL RELAY	PLAYFIELD PLAYFIELD
M 36-5500	10¢ RELAY 25¢ RELAY	MECH. PANEL MECH. PANEL
Z 27-1000	EJECT RELAY RESET RELAY OUTHOLE RELAY PLAYER RESET RELAY GAME OVER (LATCH)	MECH. PANEL MECH. PANEL MECH. PANEL MECH. PANEL MECH. PANEL

NUMBER	DESCRIPTION	LOCATION
Z 28-1150	LOCK RELAY TILT RELAY CHANGE RELAY	MECH. PANEL MECH. PANEL PLAYFIELD
Z 28-1200	BALL INDEX RELAY	MECH. PANEL
Z 35-4200	COIN RELAY REPLAY RELAY	MECH. PANEL MECH. PANEL

PARTS LIST FOR "A GO-GO"

UNIT NAME	CONTACT DISC	WIPER ASSY.	RATCHET GEAR ASSY.	MOTORS
Replay	-	-	A 6400	14 A 7805 (60 C) Control
No. Match	C 6417	C 6520-2	A 6401	14 A 7806 (50 C) Control
Ball Count	C 6417	C 6520-10	A 6402-5	14 A 7807 (60 C) Spinner
Player	C 6417	C 6521-20	A 6405-3	14 A 7808 (50 C) Spinner
Bonus	C 6417	C 6520-5	A 6402-19	
Coin	C 6417	C 6520-9	A 6402-3	
Timer	-	-	A 6400-15	
0-9	B 6297	A 6294	3 C 7128	
Tens	-	-	3 C 7128	
Hundreds	B 6297	A 6294	3 C 7128	
Thousands	B 6297	A 6294	3 C 7128	

PLAYFIELD RUBBER RINGS

PART NO.	DESCRIPTION	QTY.
23 A 6300	5/16" I. D. RUBBER RING	6
23 A 6301	3/4" I. D. RUBBER RING	13
23 A 6302	1" I. D. RUBBER RING	1
23 A 6305	2" I. D. RUBBER RING	3
23 A 6307	2-7/8" I. D. RUBBER RING	2
23 A 6425	RUBBER POST BUMPER	2