

CHICAGO COIN

RED BARON

(MODEL 460)

PARTS CATALOG

CHICAGO DYNAMIC INDUSTRIES, INC.

1725 DIVERSEY BOULEVARD ★ CHICAGO, ILLINOIS 60614 ★ PHONE (312) 935-4600

INTRODUCTION

**THIS PARTS CATALOG HAS BEEN COMPILED TO HELP THE SERVICEMAN
IN SELECTING THE PARTS NECESSARY FOR PROPER MAINTENANCE OF
CHICAGO COIN GAMES.**







**ALL MOTORS IN NEW CHICAGO COIN GAMES CARRY A 6 MONTHS WARRANTY
FROM DATE OF PURCHASE OF MACHINE.**

**ANY DEFECTIVE MOTOR WILL BE REPLACED FREE OF CHARGE BY YOUR
CHICAGO COIN DISTRIBUTOR.**

**WHEN ORDERING PARTS ALWAYS SPECIFY NAME OF UNIT, PART NUMBERS
AND A DESCRIPTION OF THE PART AS SHOWN IN THIS CATALOG.**

ADJUSTMENTS








HI-SCORE POINT ADJUSTMENT FOR SCORES UNDER 110,000

(11,000 TO 20,000) - G-GREY					
(21,000 TO 30,000) - W-BLK		6000-			-1000
(31,000 TO 40,000) - RED		7000-			-2000
(41,000 TO 50,000) - BROWN		8000-			-3000
(51,000 TO 60,000) - MAROON		9000-			-4000
(61,000 TO 70,000) - ORANGE		0000-			-5000
(71,000 TO 80,000) - GREY					
(81,000 TO 90,000) - YELLOW					
(91,000 TO 100,000) - BLACK					
(101,000 TO 110,000) - BLU-R					

EXAMPLE:

RED WIRE INTO 1000 POSITION SCORES AT 31,000
BROWN WIRE INTO 0000 POSITION SCORES AT 50,000

HI-SCORE POINT ADJUSTMENT FOR SCORES OVER 100,000

(101,000 TO 110,000) - BLU-R					
(111,000 TO 120,000) - G-GREY		6000-			-1000
(121,000 TO 130,000) - W-BLK		7000-			-2000
(131,000 TO 140,000) - RED		8000-			-3000
(141,000 TO 150,000) - BROWN		9000-			-4000
(151,000 TO 160,000) - MAROON		0000-			-5000
(161,000 TO 170,000) - ORANGE					
(171,000 TO 180,000) - GREY					
(181,000 TO 190,000) - YELLOW					
(191,000 TO 199,000) - BLACK					


EXAMPLE:

RED WIRE INTO 1000 POSITION SCORES AT 131,000
BROWN WIRE INTO 0000 POSITION SCORES AT 150,000


HIGH SCORE POINT ADJ.

HIGH SCORE — LOW SCORE ADJ.


SCORES UNDER
110,000

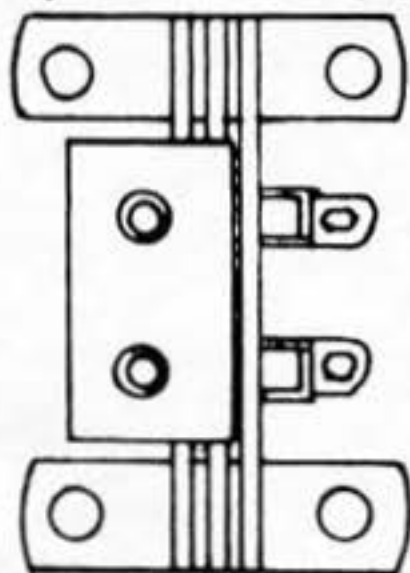

SCORES OVER
100,000

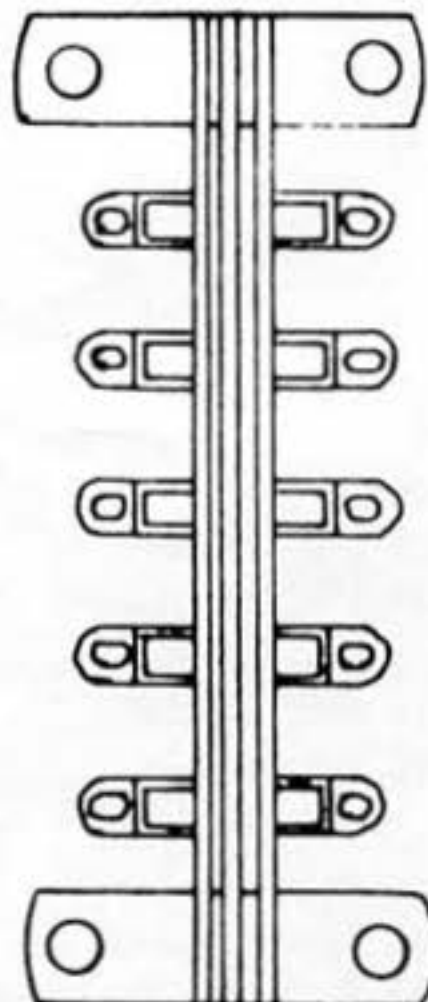


HIGH SCORE ADJ.

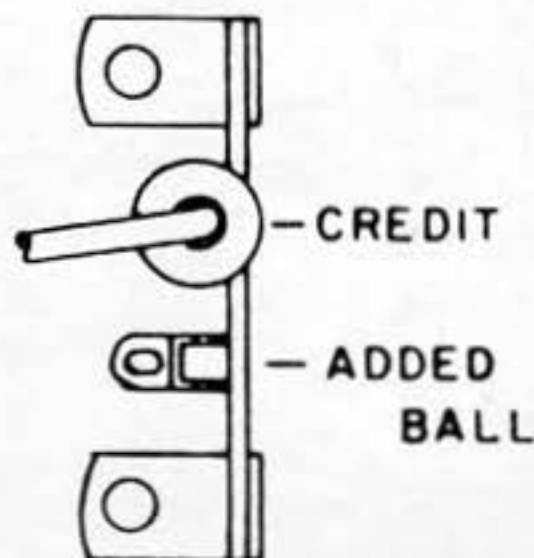


RIGHT CHUTE ADJUSTMENT

2 PLAYS
3 PLAYS
4 PLAYS
5 PLAYS

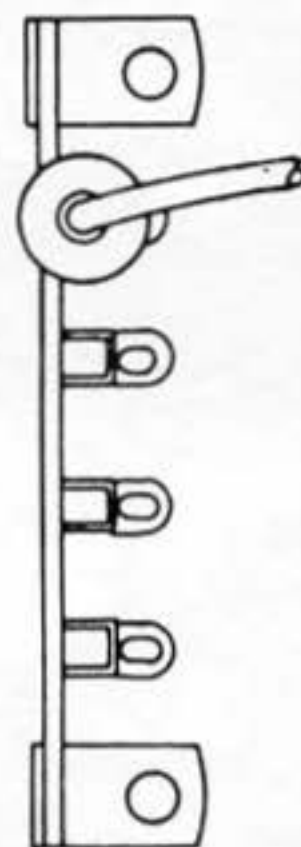


MATCH

OFF ON

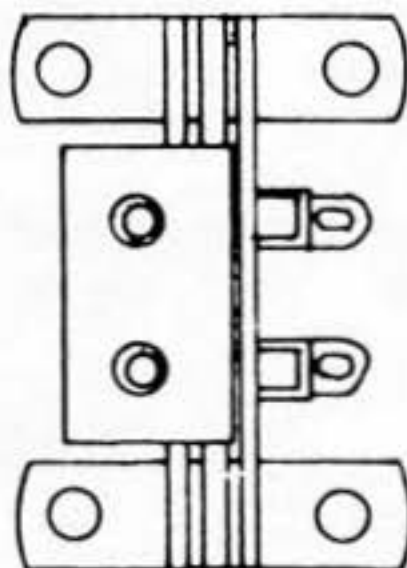

GAME ADJ.

5 BALLS 3 BALLS

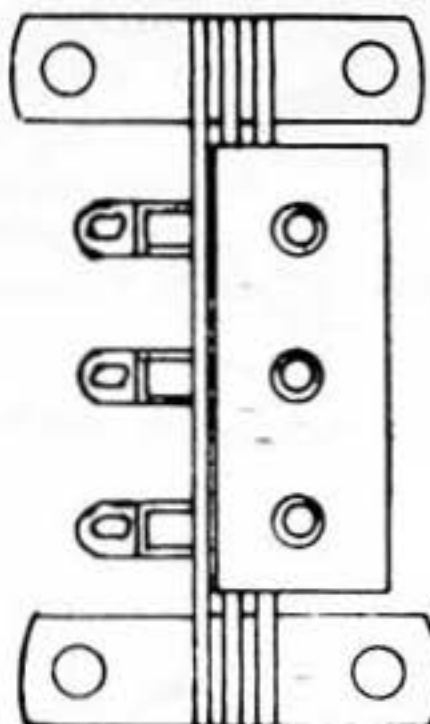

1 COIN - 1 PLAY
2 COINS - 3 PLAYS


ON
OFF



CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

CABINET COMPLETE

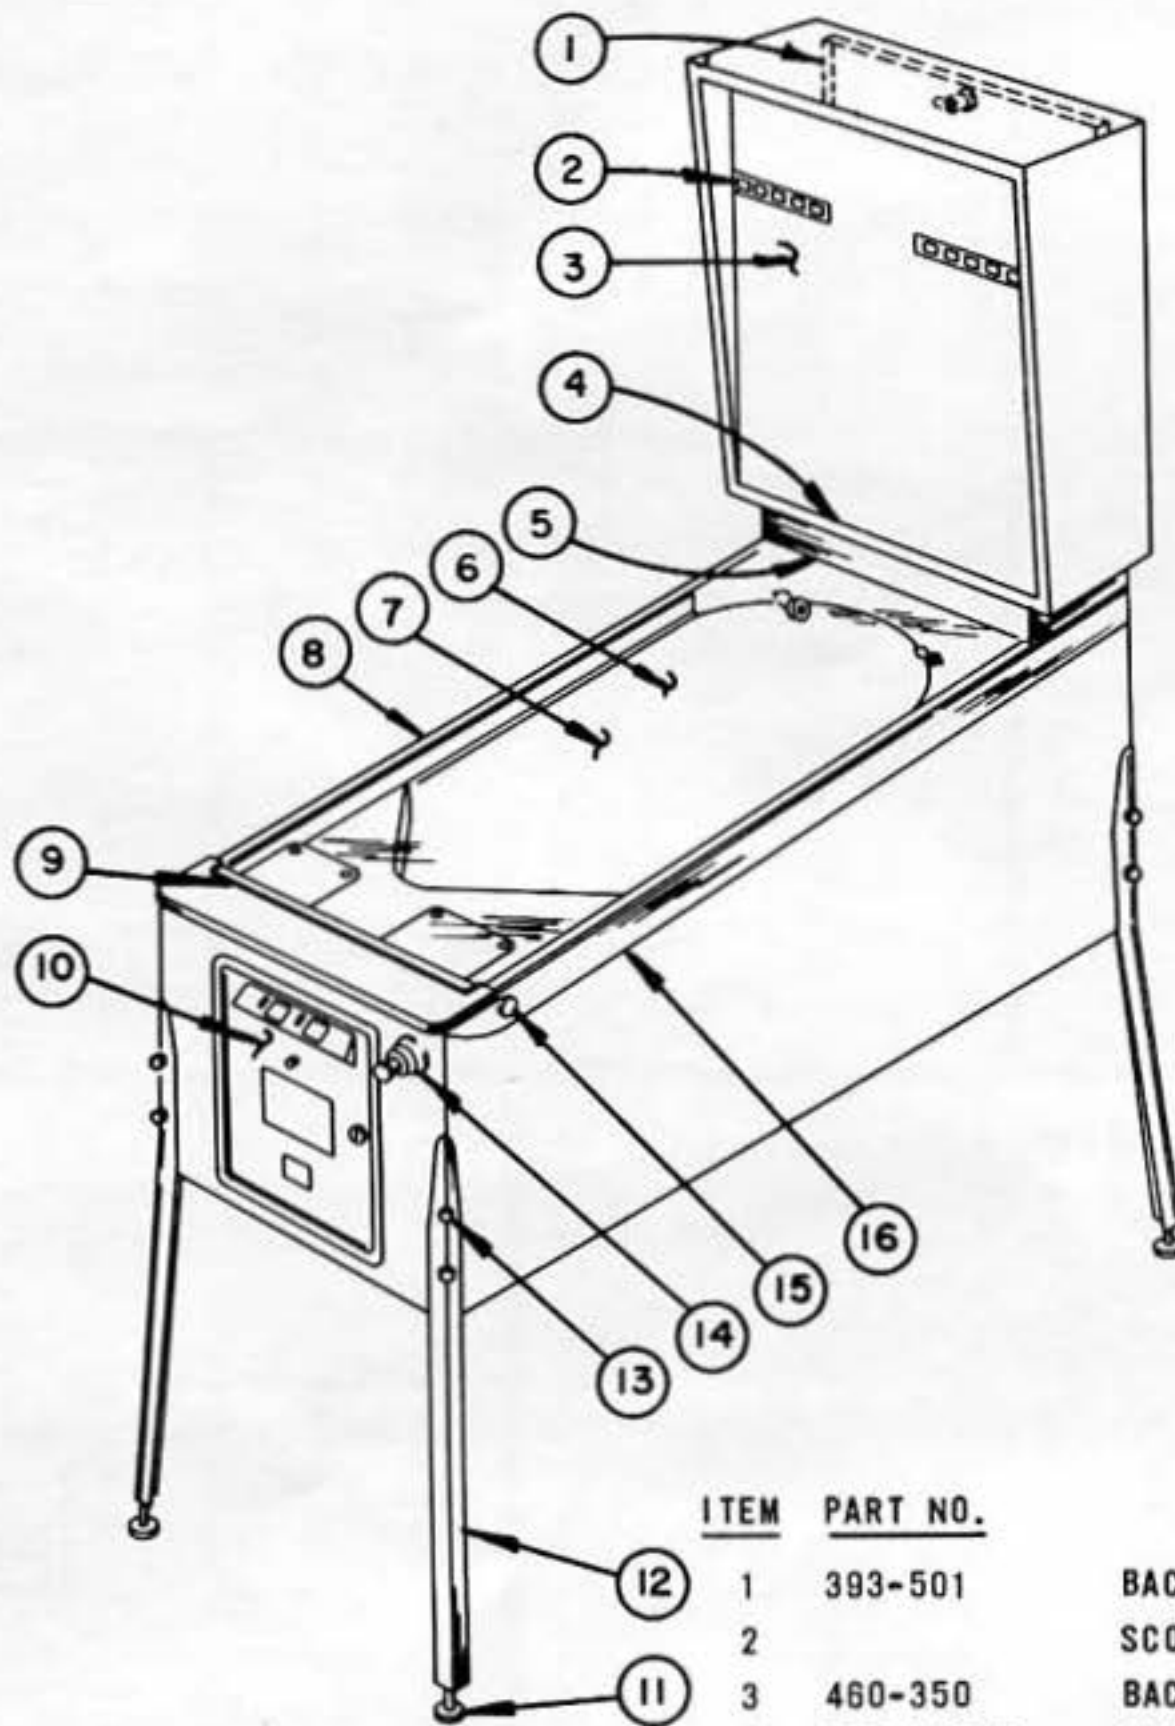


ITEM	PART NO.	DESCRIPTION
1	393-501	BACK DOOR
2		SCORING DRUM UNITS (SEE PAGE 24)
3	460-350	BACKRACK GLASS (25-1/2" x 28-1/2" x 3/16")
4	344-506-C	GLASS LIFT CHANNEL
	344-800-T	PLASTIC GLASS CHANNEL (TOP)
	344-800-V	PLASTIC GLASS CHANNEL (TWO SIDE)
5	295-536	GLASS BACK SPACER
	295-537	GLASS TOP BACK ARCH
6		TOP OF PLAYFIELD (SEE PAGE 6)
7	#6550-T	TOP GLASS (21" x 43" x 3/16")
8	326-539-L	GLASS CHANNEL COVER
9		FRONT MOLDING (SEE PAGE 3)
10		CASH DOOR & COMPARTMENT (SEE PAGES 4 & 5)
	446-509	CASH BOX
	339-508-B-C	CASH BOX COVER
	446-800	COIN TRAY (WIDE) 2-REQ'D.
	446-801	COIN TRAY (NARROW)
11	#6851	LEG LEVELER
12	291-2501-B	METAL CABINET LEG ASS'Y
13		3/8-16 x 2-1/4" LG. HEX HD. BOLTS
14		SHOOTER ASS'Y (SEE PAGE 3)
15		FLIPPER BUTTON (SEE BACK INSIDE COVER)
16	326-539-R	GLASS CHANNEL COVER

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

FRONT MOLDING & SHOOTER ASSEMBLY

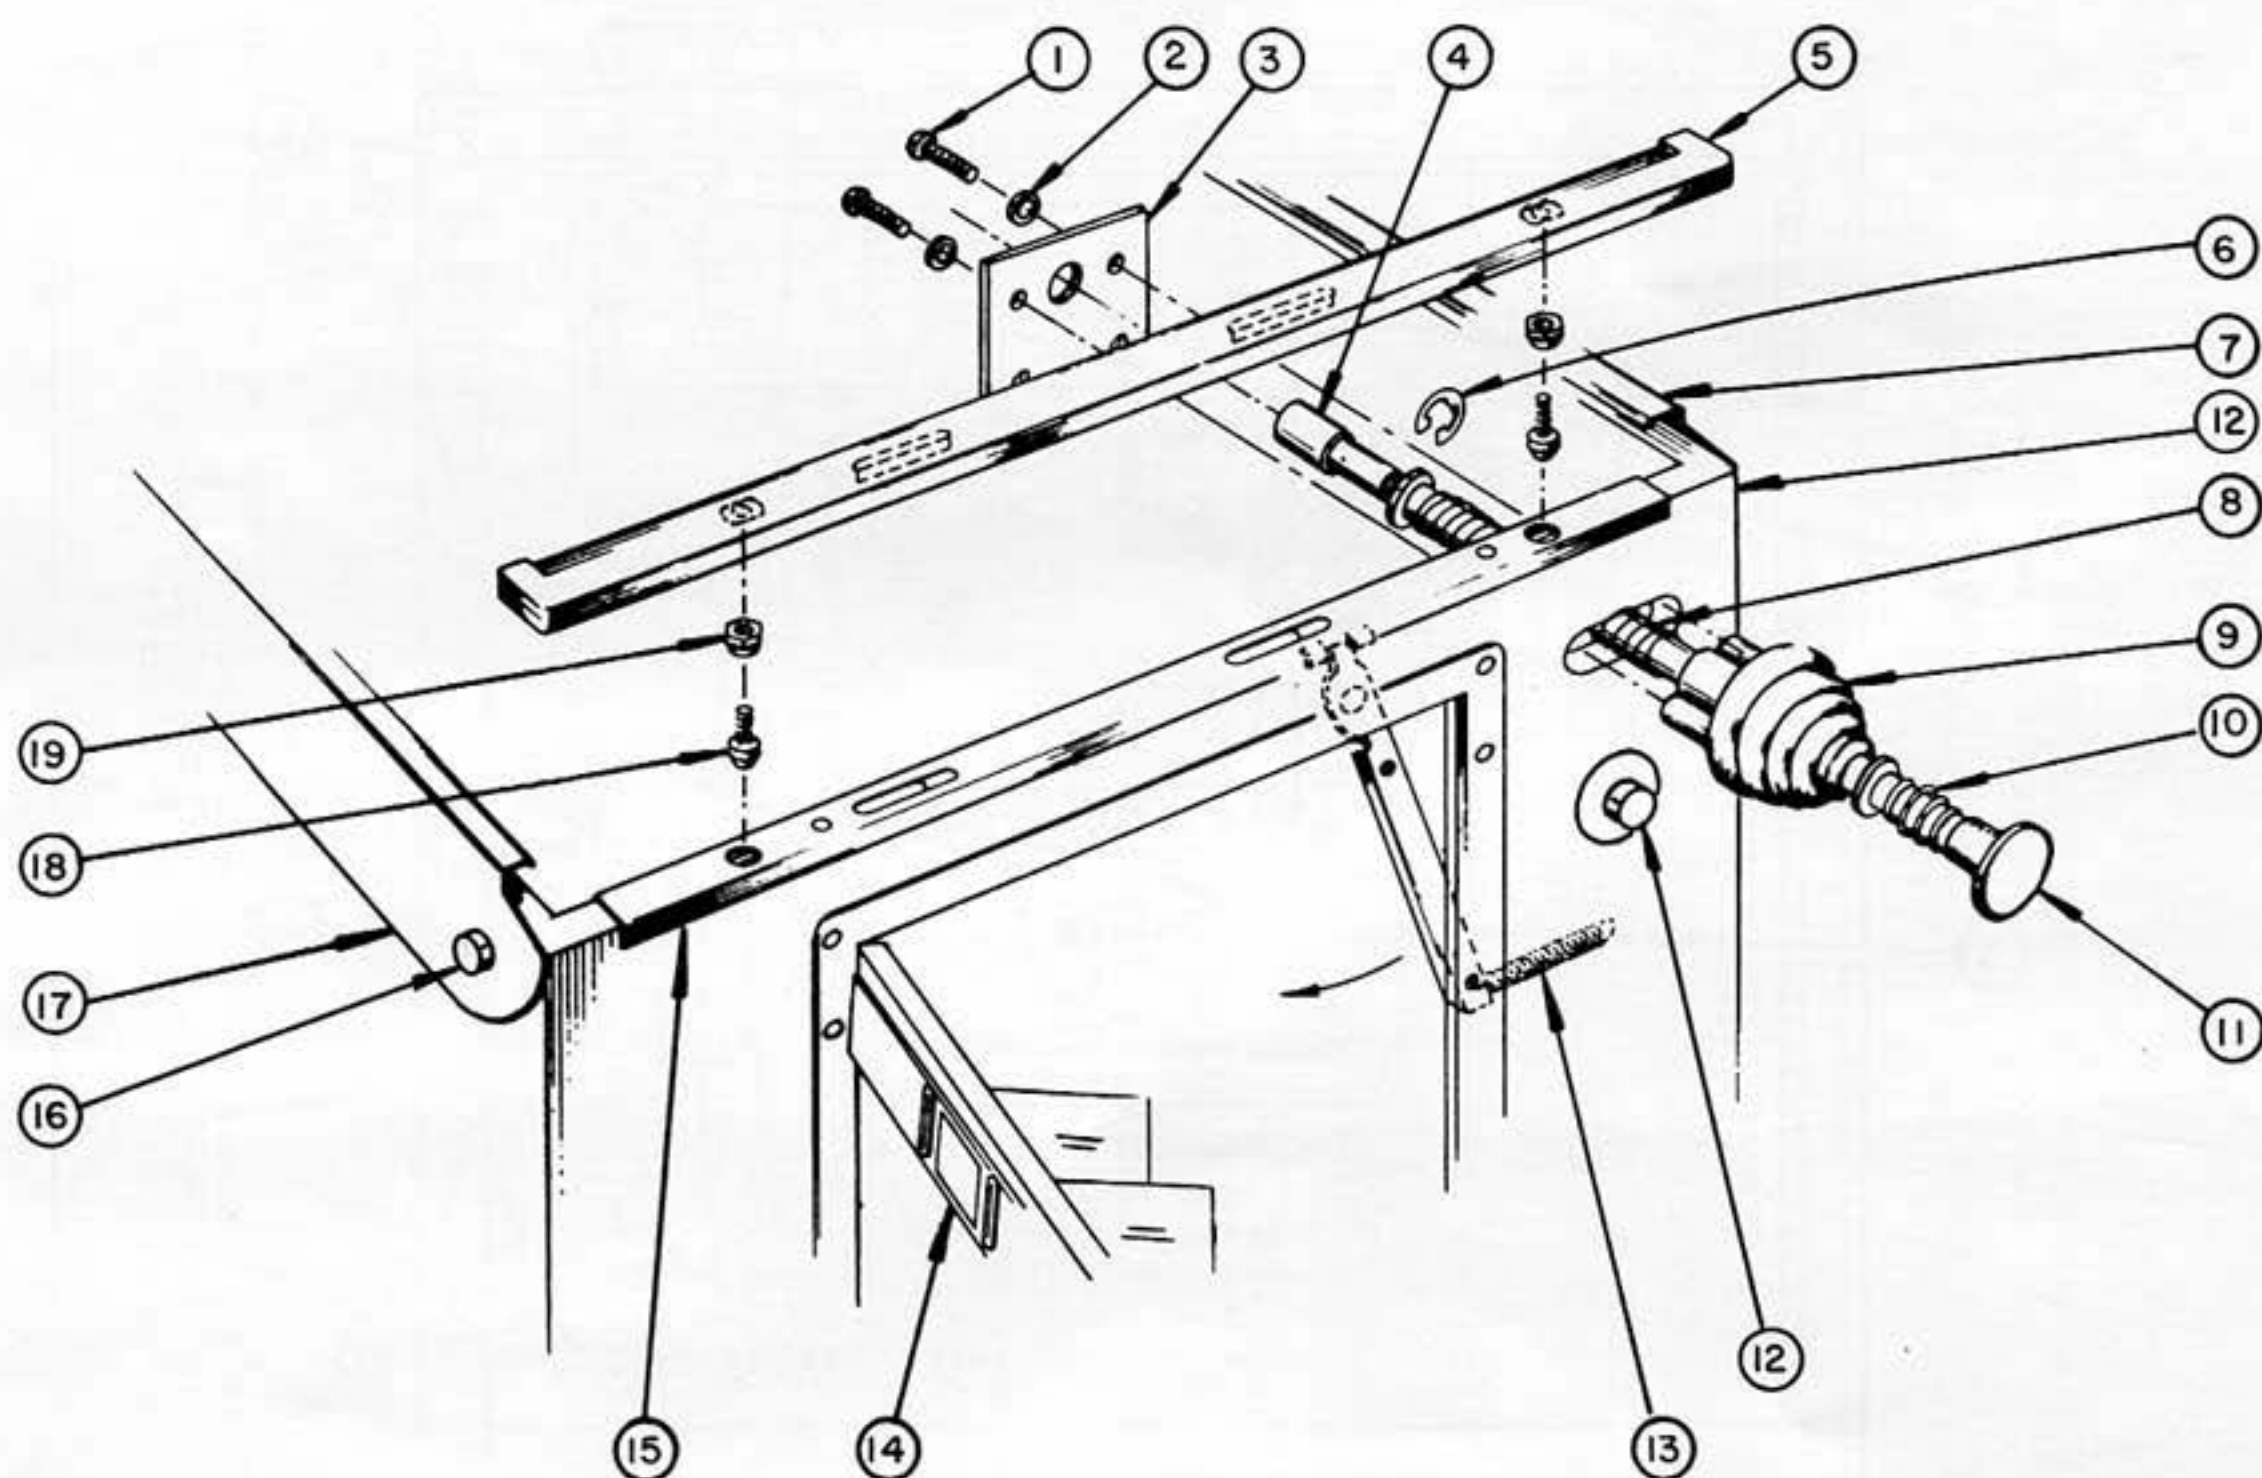


ITEM	PART NO.	DESCRIPTION
1		#10-32 x 1-1/8 LG. R.H.M.S.
2	#5478	EXTERNAL SHAKEPROOF LOCKWASHER
3	308-500	PLUNGER BUSHING MTG. BRKT.
4	#6086	PLUNGER TIP
5	339-2516	FRONT MOLDING ASS'Y
6	#6722-37	RETAINING RING
7	326-539-R	GLASS CHANNEL COVER
8	295-903	SHOOTER TENSION SPRING
9	#16519-W	BALL SHOOTER HOUSING
10	295-902	SHOOTER CHECK SPRING
11	439-2508	SHOOTER ROD ASS'Y
12		CREDIT & FLIPPER BUTTON (SEE BACK INSIDE COVER)
13	250-900	RETRACTION SPRING
14		CASH COMPARTMENT DOOR (SEE PAGES 4 & 5)
15	393-2503	FRONT MOLDING LOCK ASS'Y
16		LEFT FLIPPER BUTTON (SEE BACK INSIDE COVER)
17	326-539-L	GLASS CHANNEL COVER
18	326-1500	FRONT MOLDING ADJUSTING SCREW
19	326-1501	FRONT MOLDING LOCK NUT

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

CASH COMPARTMENT

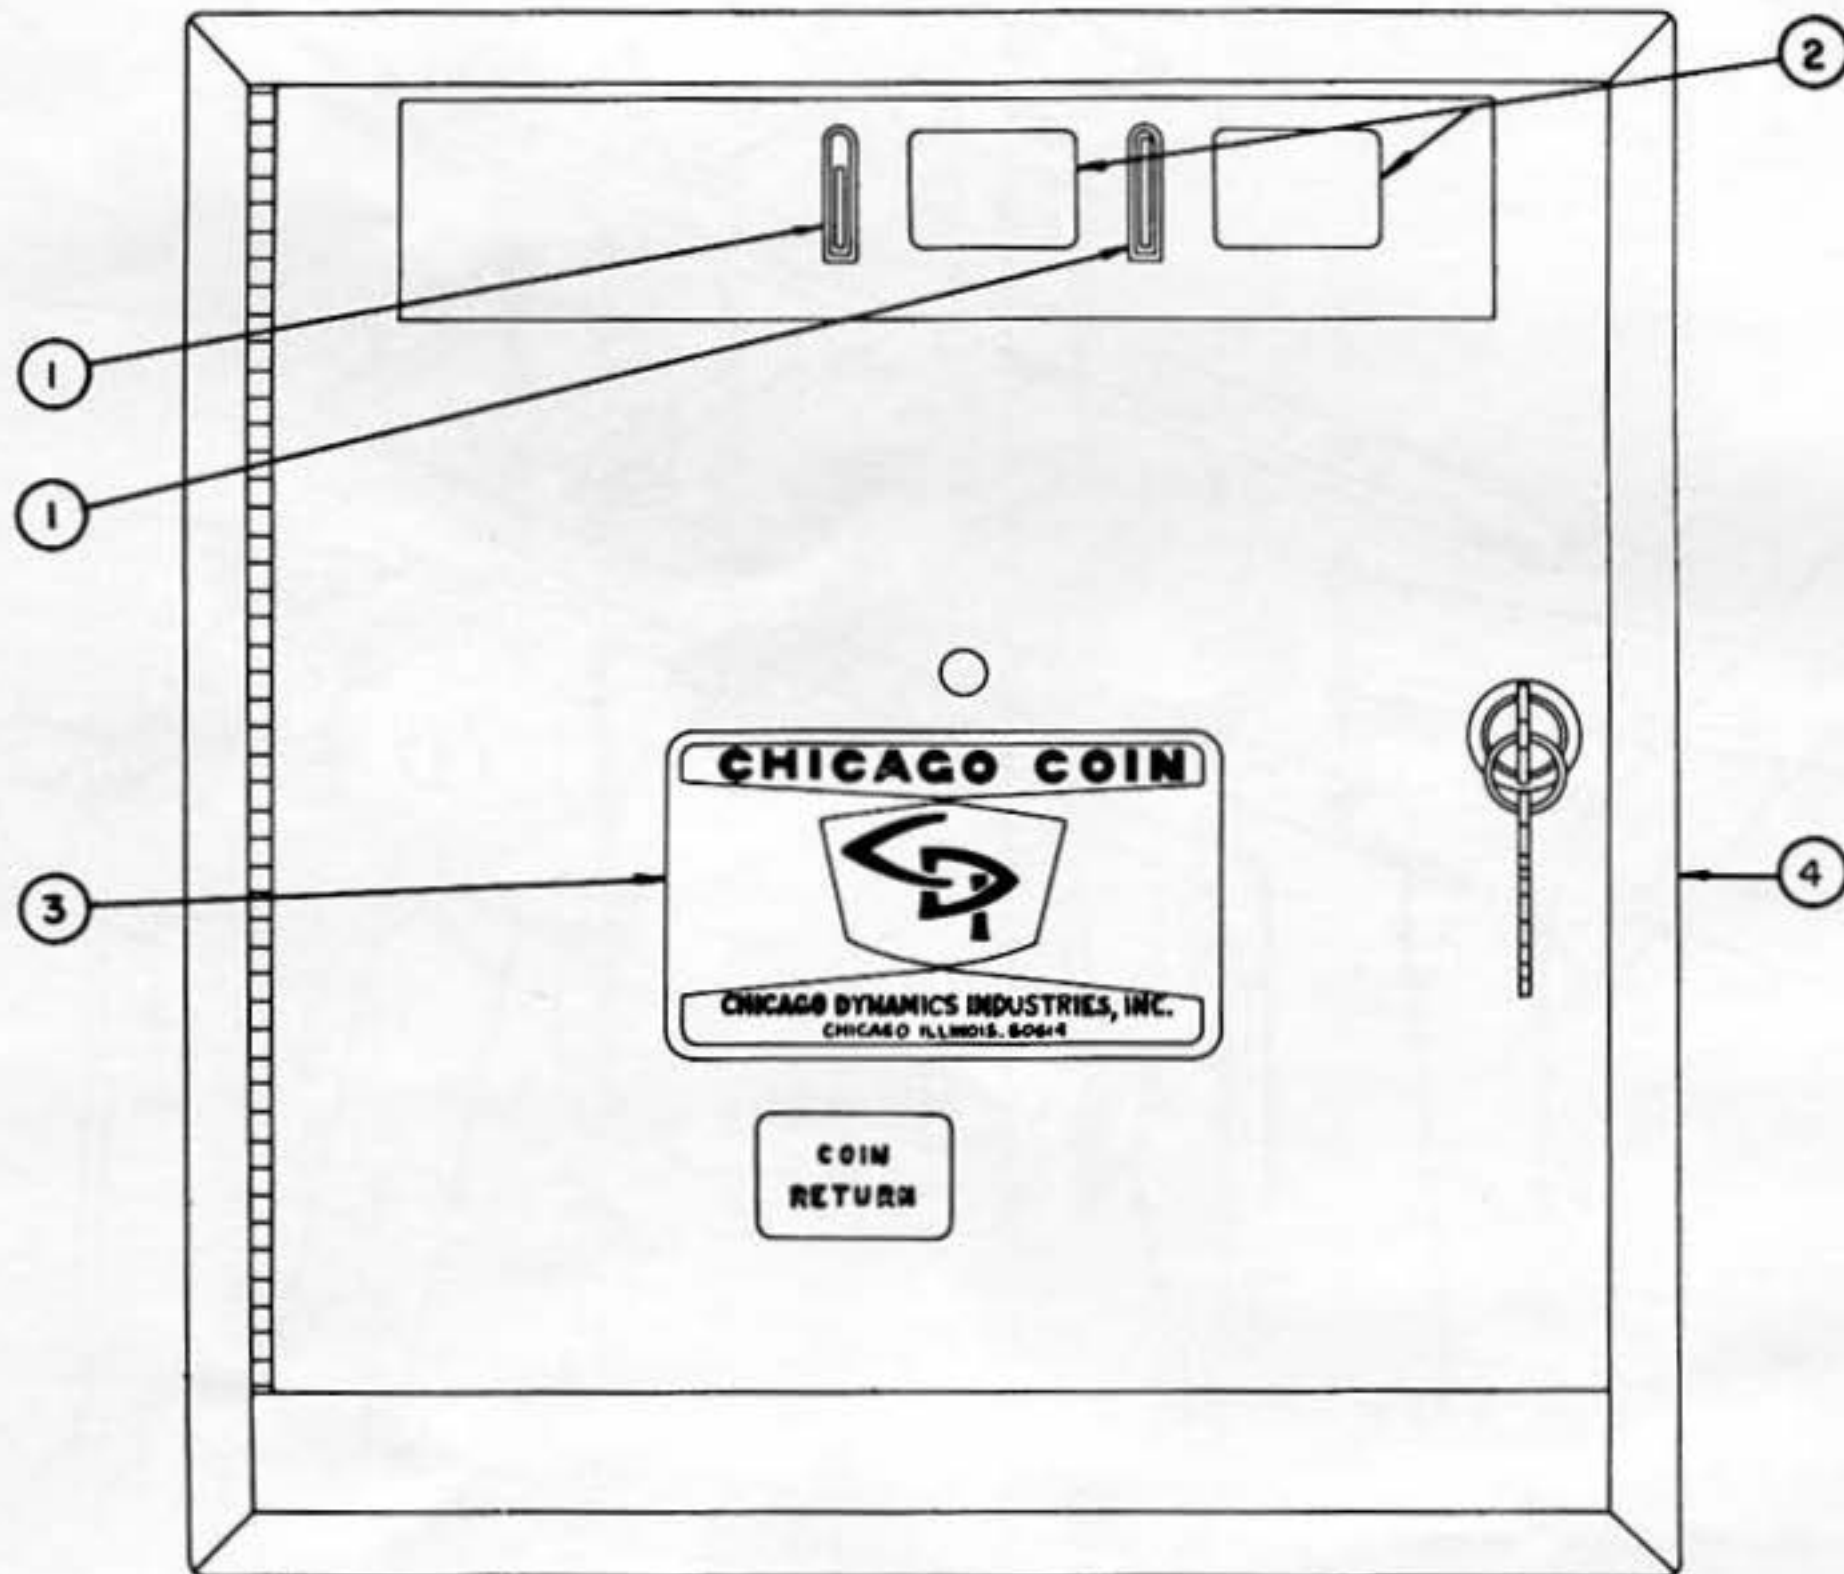

ITEM	PART NO.	DESCRIPTION
1	382-800	COIN ENTRY MOLDING (SEE PAGE 26)
2		COIN DENOMINATION WINDOW (SEE PAGES 26 & 27)
3	#6883	C.D.I. DECAL
4	384-2502	FRONT DOOR FRAME ASS'Y

CASH COMPARTMENT DOOR

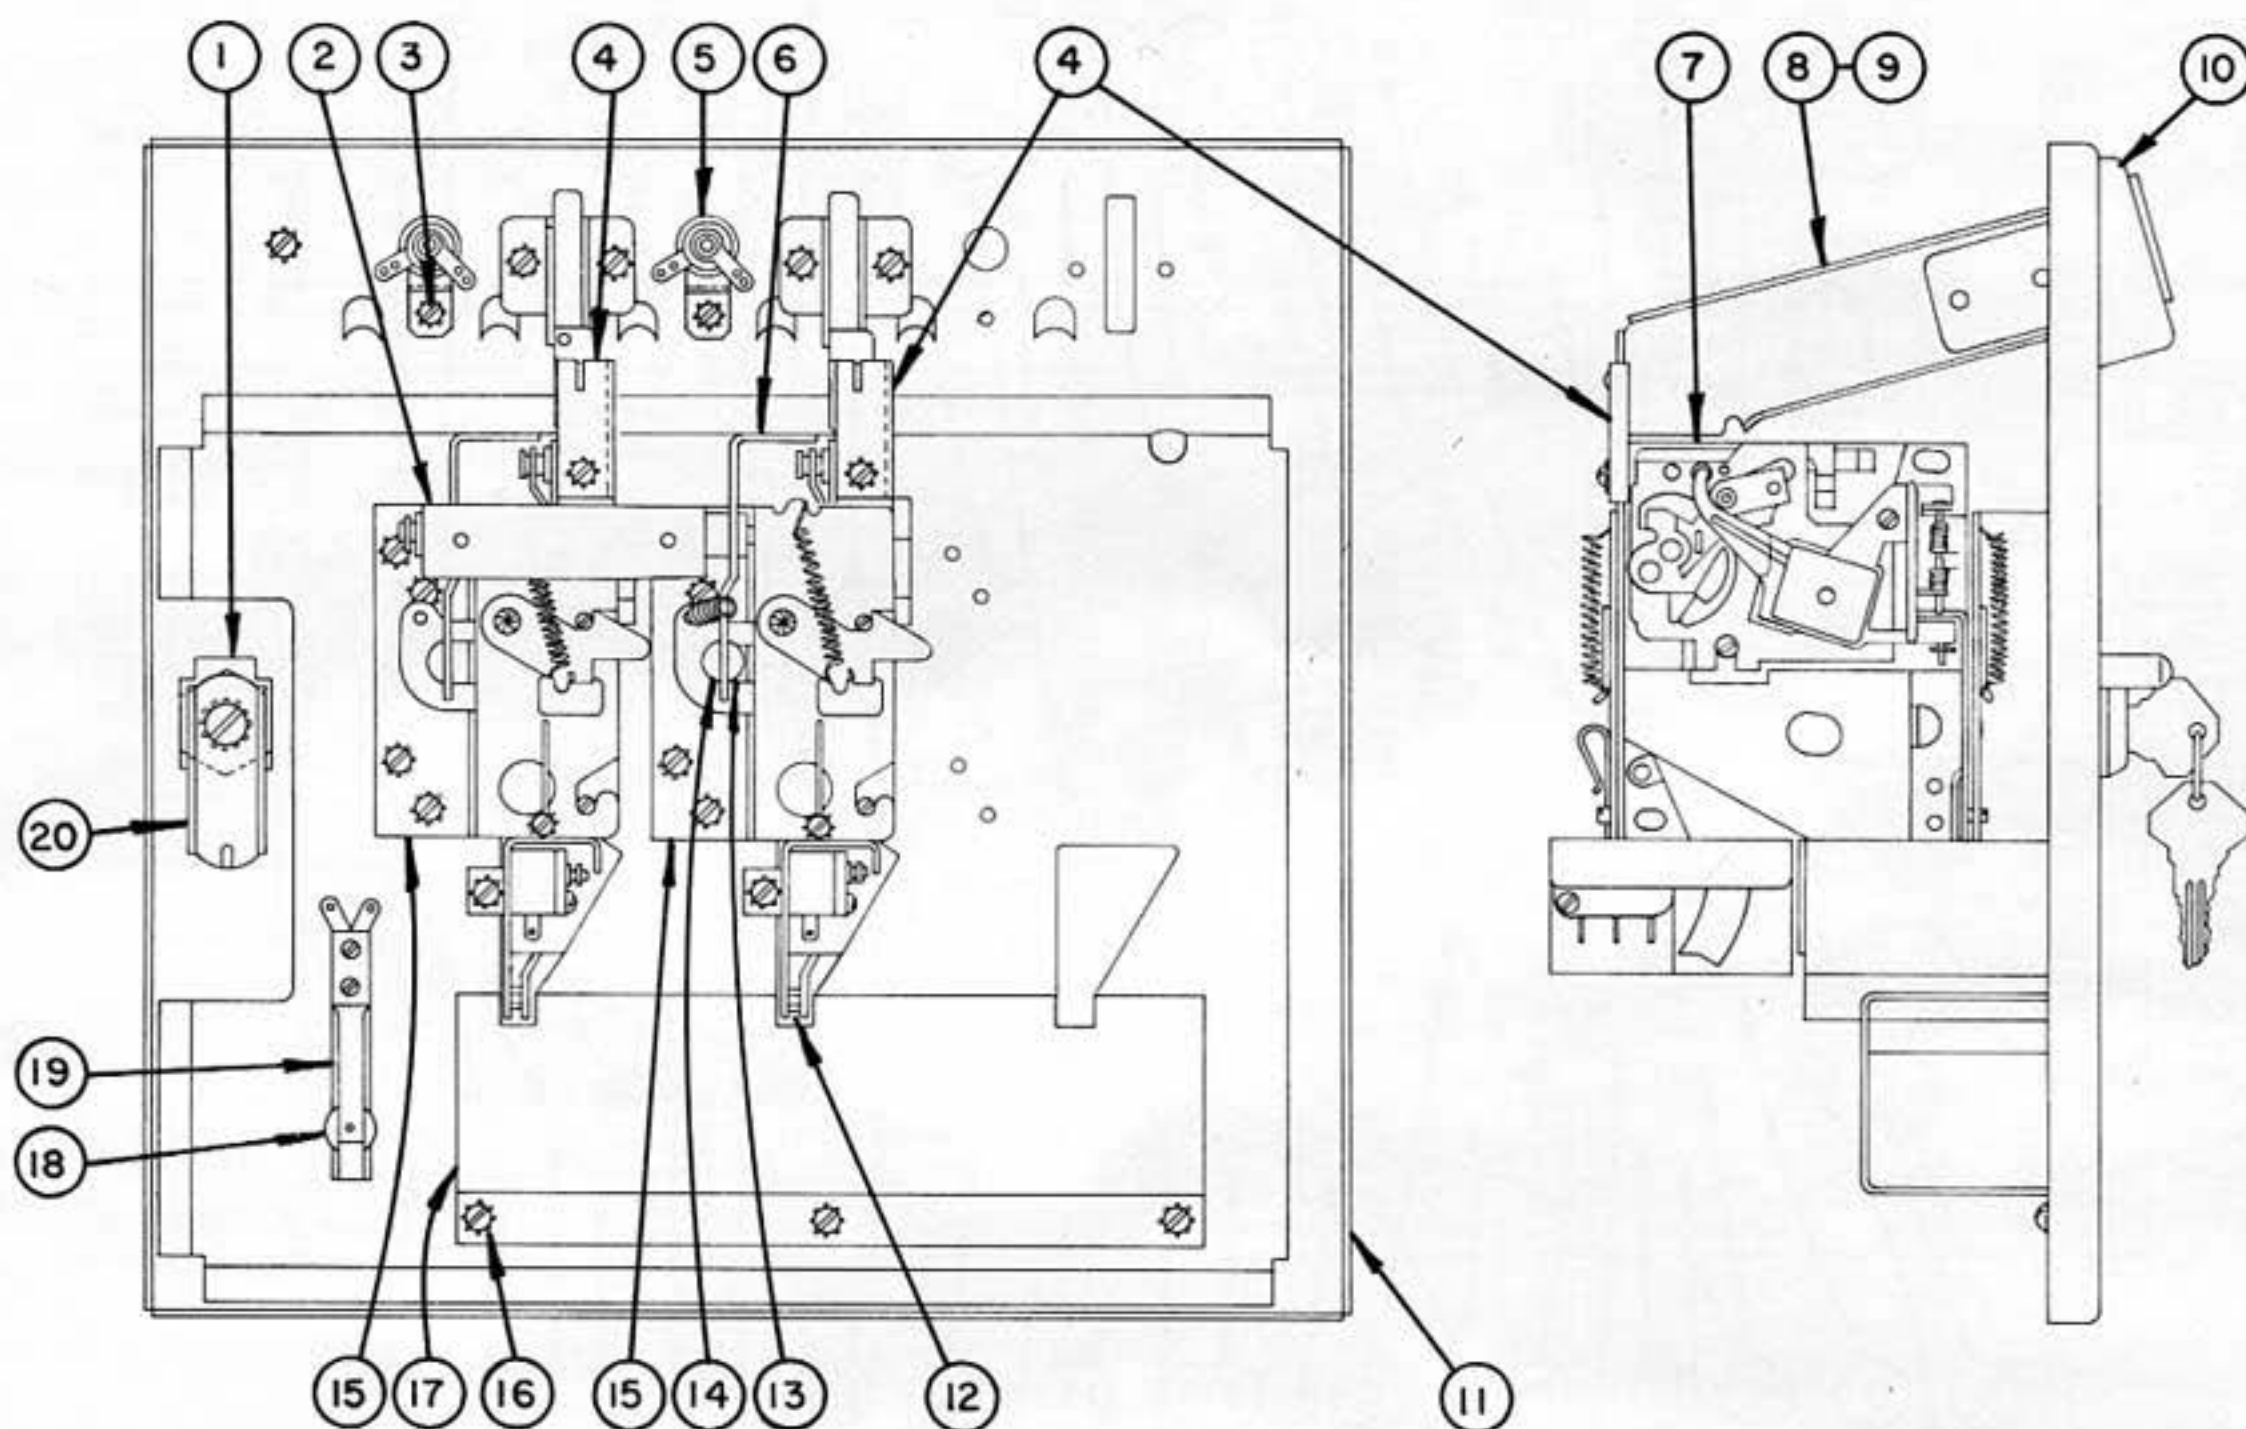


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	382-2520-B-C	COMPLETE FRONT ASS'Y	11	382-2507	FRONT DOOR & REINFORCEMENT ASS'Y
1	246-551	LOCK PLATE	12	333-2528	REJECTED COIN CONCUR FUNNEL ASS'Y
2	326-521	REJECTOR BRACKET	13	326-1505	REJECTOR ROD
3		#6-32 x 1/4" LG. SEMS UNIT	14	#6822-37	RETAINING RING
4	248-510	CENTERING BRACKET	15	333-2530-S	HOUSING, MICRO SWITCH & COIN LOCK OUT COIL ASS'Y (248-301 COIL)
5	#5266	BAYONET SOCKET		326-2522	HOUSING SHELL ASSEMBLY (326-2522-S WITH COIN LOCK OUT COIL MOUNTED)
	#5212	BULB		248-300	MICRO SWITCH (SPECIFY COIN DENOMINATION FOR PROPER MICRO SW.)
6	326-2510	REJECTOR ARM & BUSHING ASS'Y			#8-32 x 1/4" LG. SEMS UNIT
	#5303	WASHER	16		COIN RETURN HOUSING ASS'Y
	#6722-18	RETAINING RING	17	326-2527	SWITCH ASS'Y
7	#6801	COIN ACCEPTOR INSERT (SPECIFY COIN DENOMINATION)	18	#220	ANTI-GROUNDING FINGER
8	382-2501	COIN GUIDE ASSEMBLY	19	326-544-A	LOCK CAM
9	382-2502	COIN GUIDE COVER ASS'Y	20	460-505	LOCK
	382-2502-A	COIN GUIDE COVER ASS'Y FOR 25¢ COIN ACCEPTOR ONLY		#6720	
10	382-2504-B-C	COIN WINDOW BRACKET ASS'Y			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

TOP OF PLAYFIELD

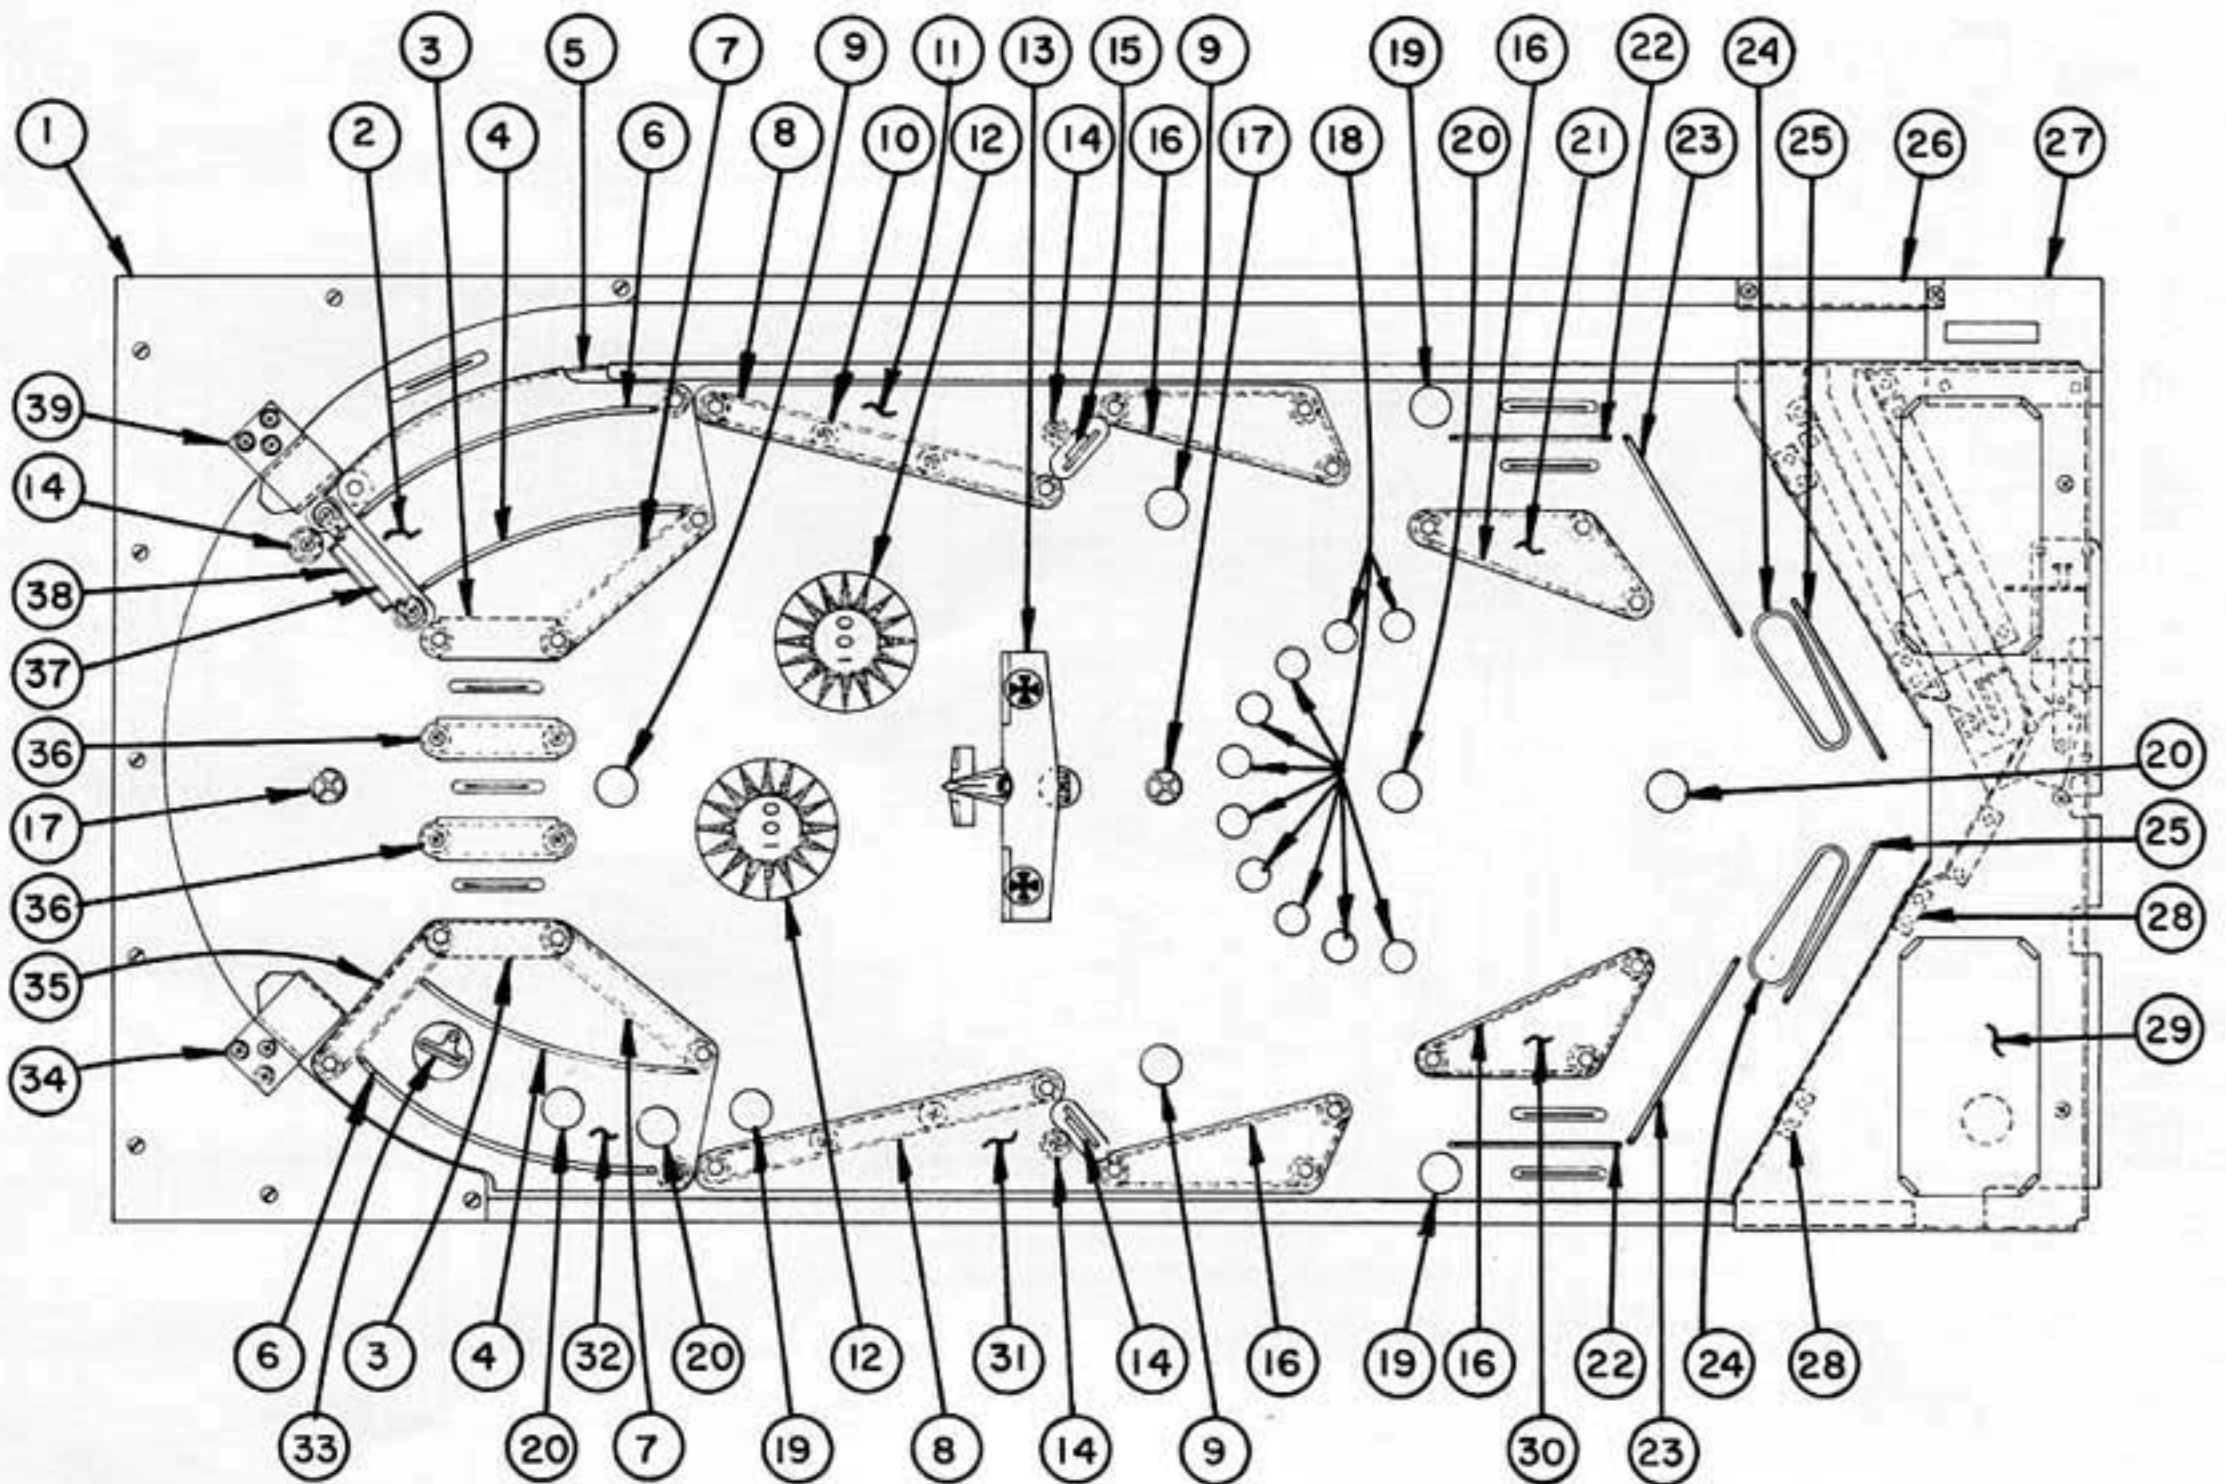


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	452-502-Y	METAL ARCH TOP (PAINTED)	19	#16528-R	1" DIA. PANEL INSERT (RED)
	295-514	METAL ARCH BOTTOM	20	#16528-W	1" DIA. PANEL INSERT (WHITE)
	295-512	METAL ARCH SPACERS	21	460-300-B	PLAYFIELD LIGHT SHIELD (*)
2	460-300-F	PLAYFIELD LIGHT SHIELD (*)	22	439-903-A	PLAYFIELD WIRE FORM
3	#16537-W	CUT GUIDE RAIL 2-1/2" LG. (WHITE)	23	439-903-B	PLAYFIELD WIRE FORM
4	460-902	PLAYFIELD WIRE FORM	24		FLIPPER ASS'Y (SEE PAGE 9)
5	393-902	PLAYFIELD WIRE FORM	25	431-900	PLAYFIELD WIRE FORM
6	460-901	PLAYFIELD WIRE FORM	26	326-528	STRIKE PLATE
7	#6053	2-1/2" DIA. RUBBER RING	27	460-507-S	SHOOTER INDICATOR (SCREENED)
8	#6054	3-1/2" DIA. RUBBER RING	28	439-502	INSTRUCTION PLATE RETAINER
9	#16528-Y	1" DIA. PANEL INSERT (YELLOW)	29	460-506-S	INSTRUCTION PLATE (SCREENED)
10	#16533-W	PLASTIC POSTS (WHITE) (27-REQ'D.)	30	460-300-A	PLAYFIELD LIGHT SHIELD (*)
	#16501-R	PLASTIC POSTS (RED) (8-REQ'D.)	31	460-300-C	PLAYFIELD LIGHT SHIELD (*)
11	460-300-D	PLAYFIELD LIGHT SHIELD (*)	32	460-300-E	PLAYFIELD LIGHT SHIELD (*)
12	455-2518	THUMPER BUMPER (SEE PAGE 10)	33		BALL KICKER ASS'Y (SEE PAGE 12)
	431-301	ACETATE WAFER	34	231-2517-L	BALL GATE ASS'Y (LEFT)
13	460-2509	SPINNER MTG. BRKT. & AIRPLANE ASS'Y	35	#6063	2" DIA. RUBBER RING
14	#6060	5/16" DIA. RUBBER RING	36	#16502-Y	TWO SIDED GUIDE RAIL 2-1/2" LG. (YELLOW)
15	460-2508-1&K	DROP TARGET ASS'Y (SEE PAGE 13)	37	339-2502-R	LANE GATE & STOP BRACKET ASS'Y
16	#6056	3" DIA. RUBBER RING	38	452-901	LANE GATE WIRE FORM
17	408-2502	ROLL OVER BUTTON ASS'Y (SEE PAGE 17)	39	231-2517	BALL GATE ASS'Y (RIGHT)
18	#16529-W	3/4 DIA. PANEL INSERT (WHITE)			

*MOUNTED WITH
326-1507-A ACETATE COVER MTG. POSTS &
#6-32 HEX NUT

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

BALL EJECTOR UNIT

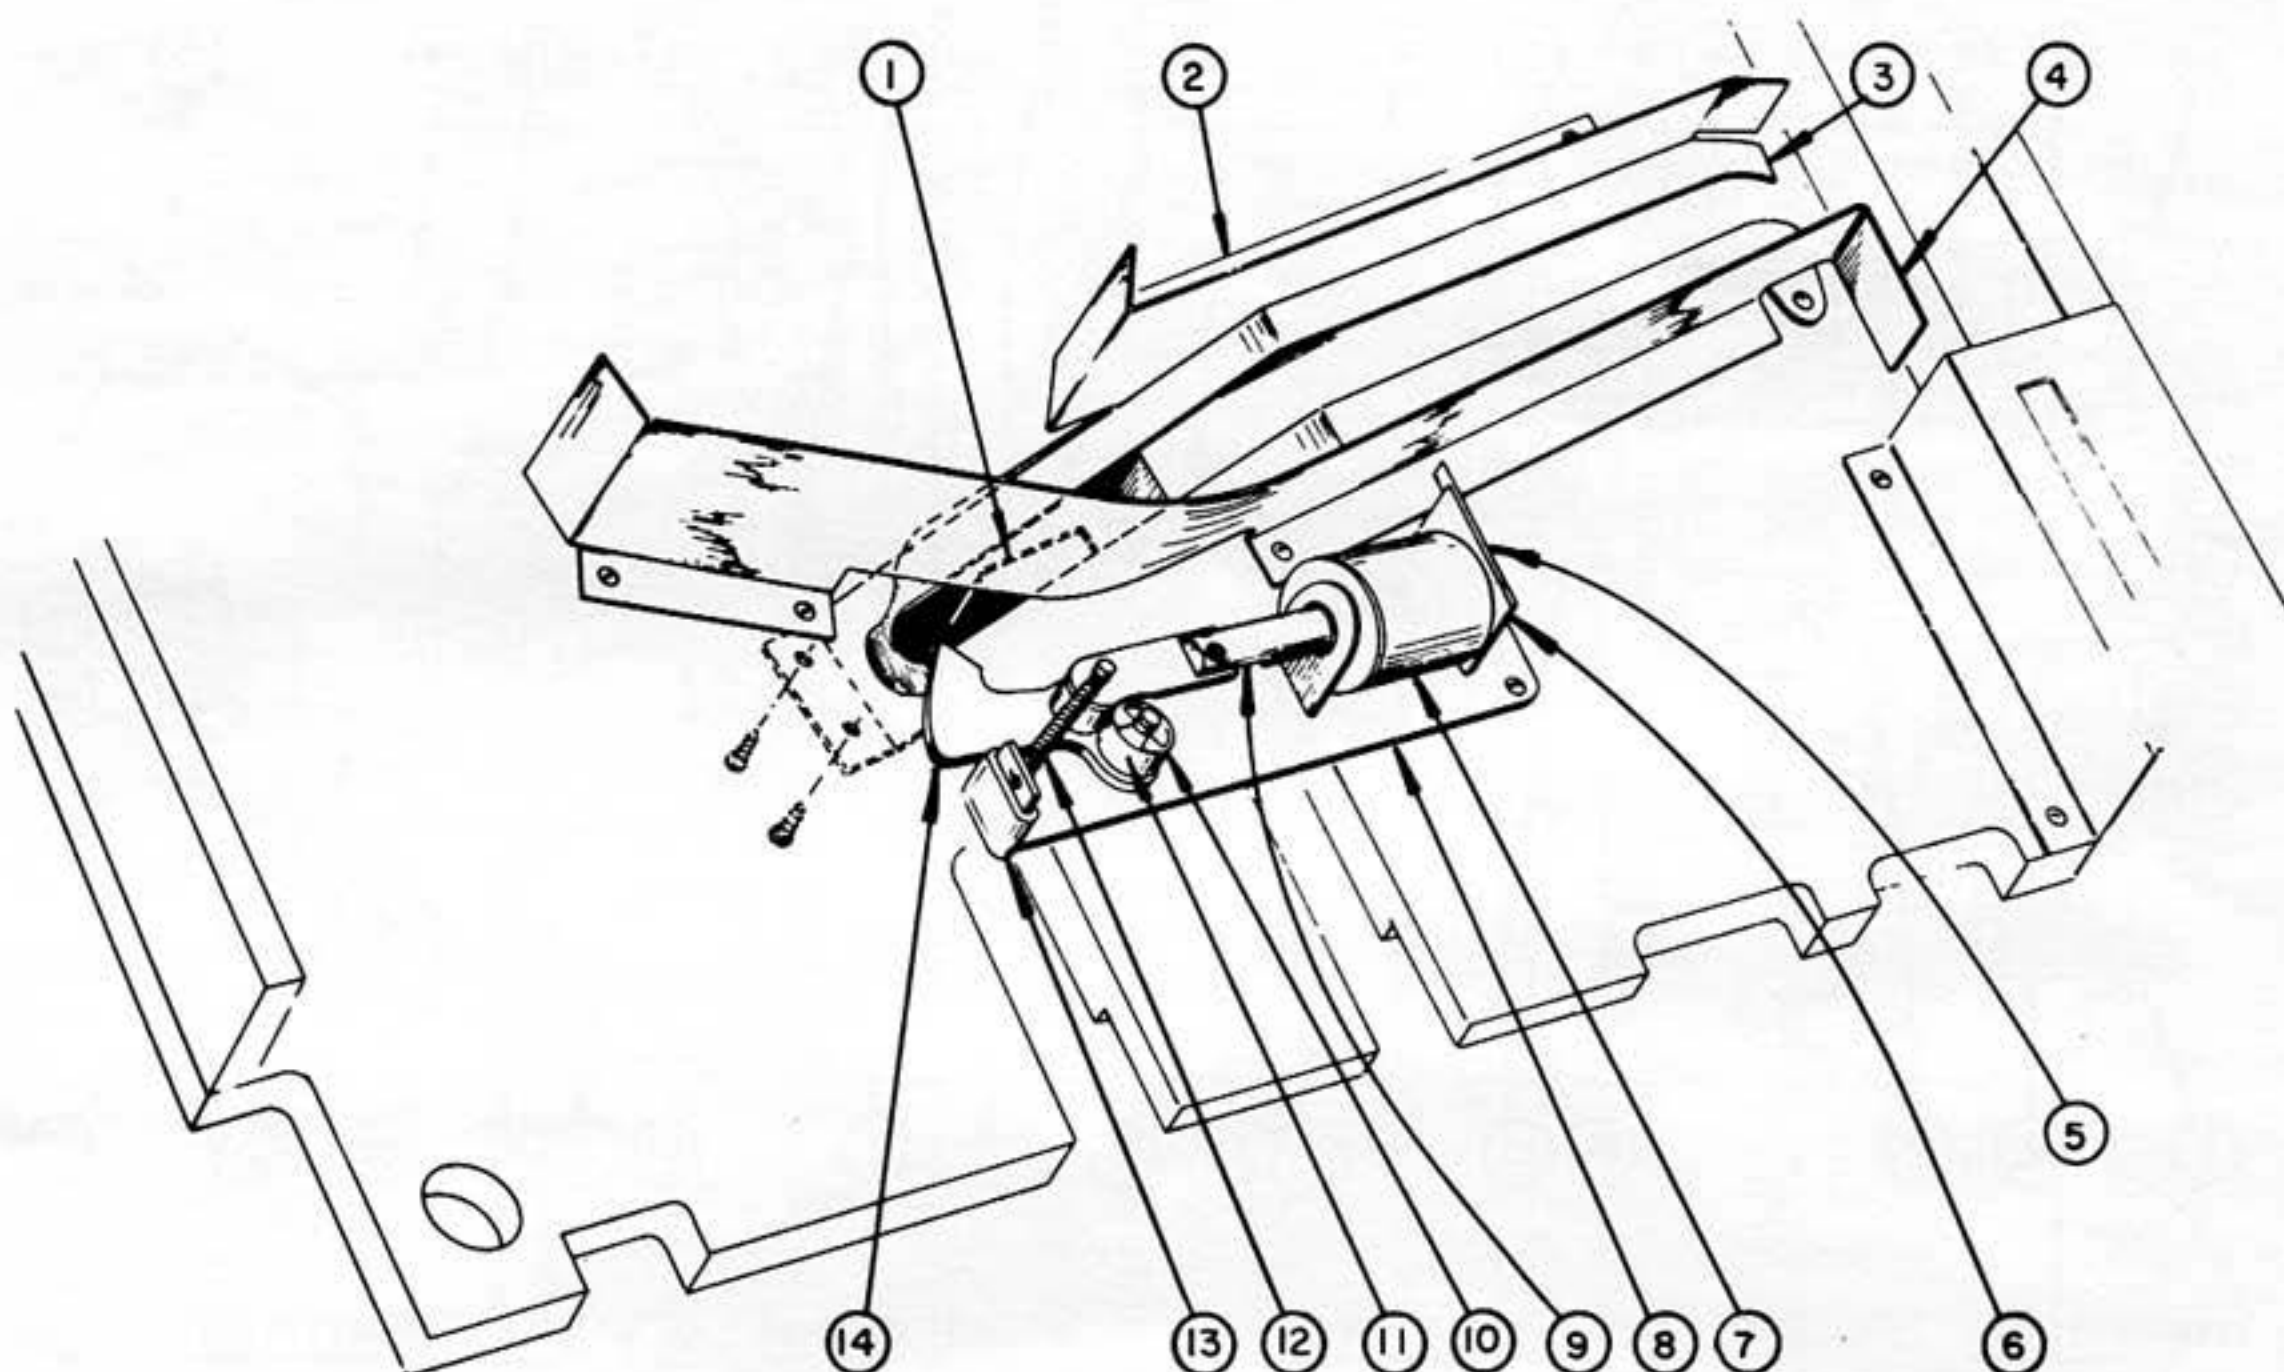

ITEM	PART NO.	DESCRIPTION
1	326-904	BALL EJECTOR WIRE FORM
2	326-512	UPPER BALL RETURN GUIDE RAIL
3	326-508	BALL RETURN RUNWAY
4	326-513	LOWER BALL RETURN GUIDE RAIL
5	366-2505-A	COMPLETE BALL EJECTOR UNIT
		THE FOLLOWING ITEMS ARE IN 366-2505-A ASS'Y
6	124-2500	PLUNGER STOP ASS'Y
7	J-22-550	COIL COMPLETE
	130-1535	SOLENOID TUBING
8	326-2519	BALL EJECTOR MTG. PLATE & STUD ASS'Y
9	366-2506	PLUNGER & LINK ASS'Y
10	#6722-25	RETAINING RING
11	#5373	WASHER
12	326-902	PLUNGER RETURN SPRING
13	326-302	PLASTIC SLEEVE
14	366-2504	BALL EJECTOR ARM ASS'Y

UNDERSIDE OF PLAYFIELD

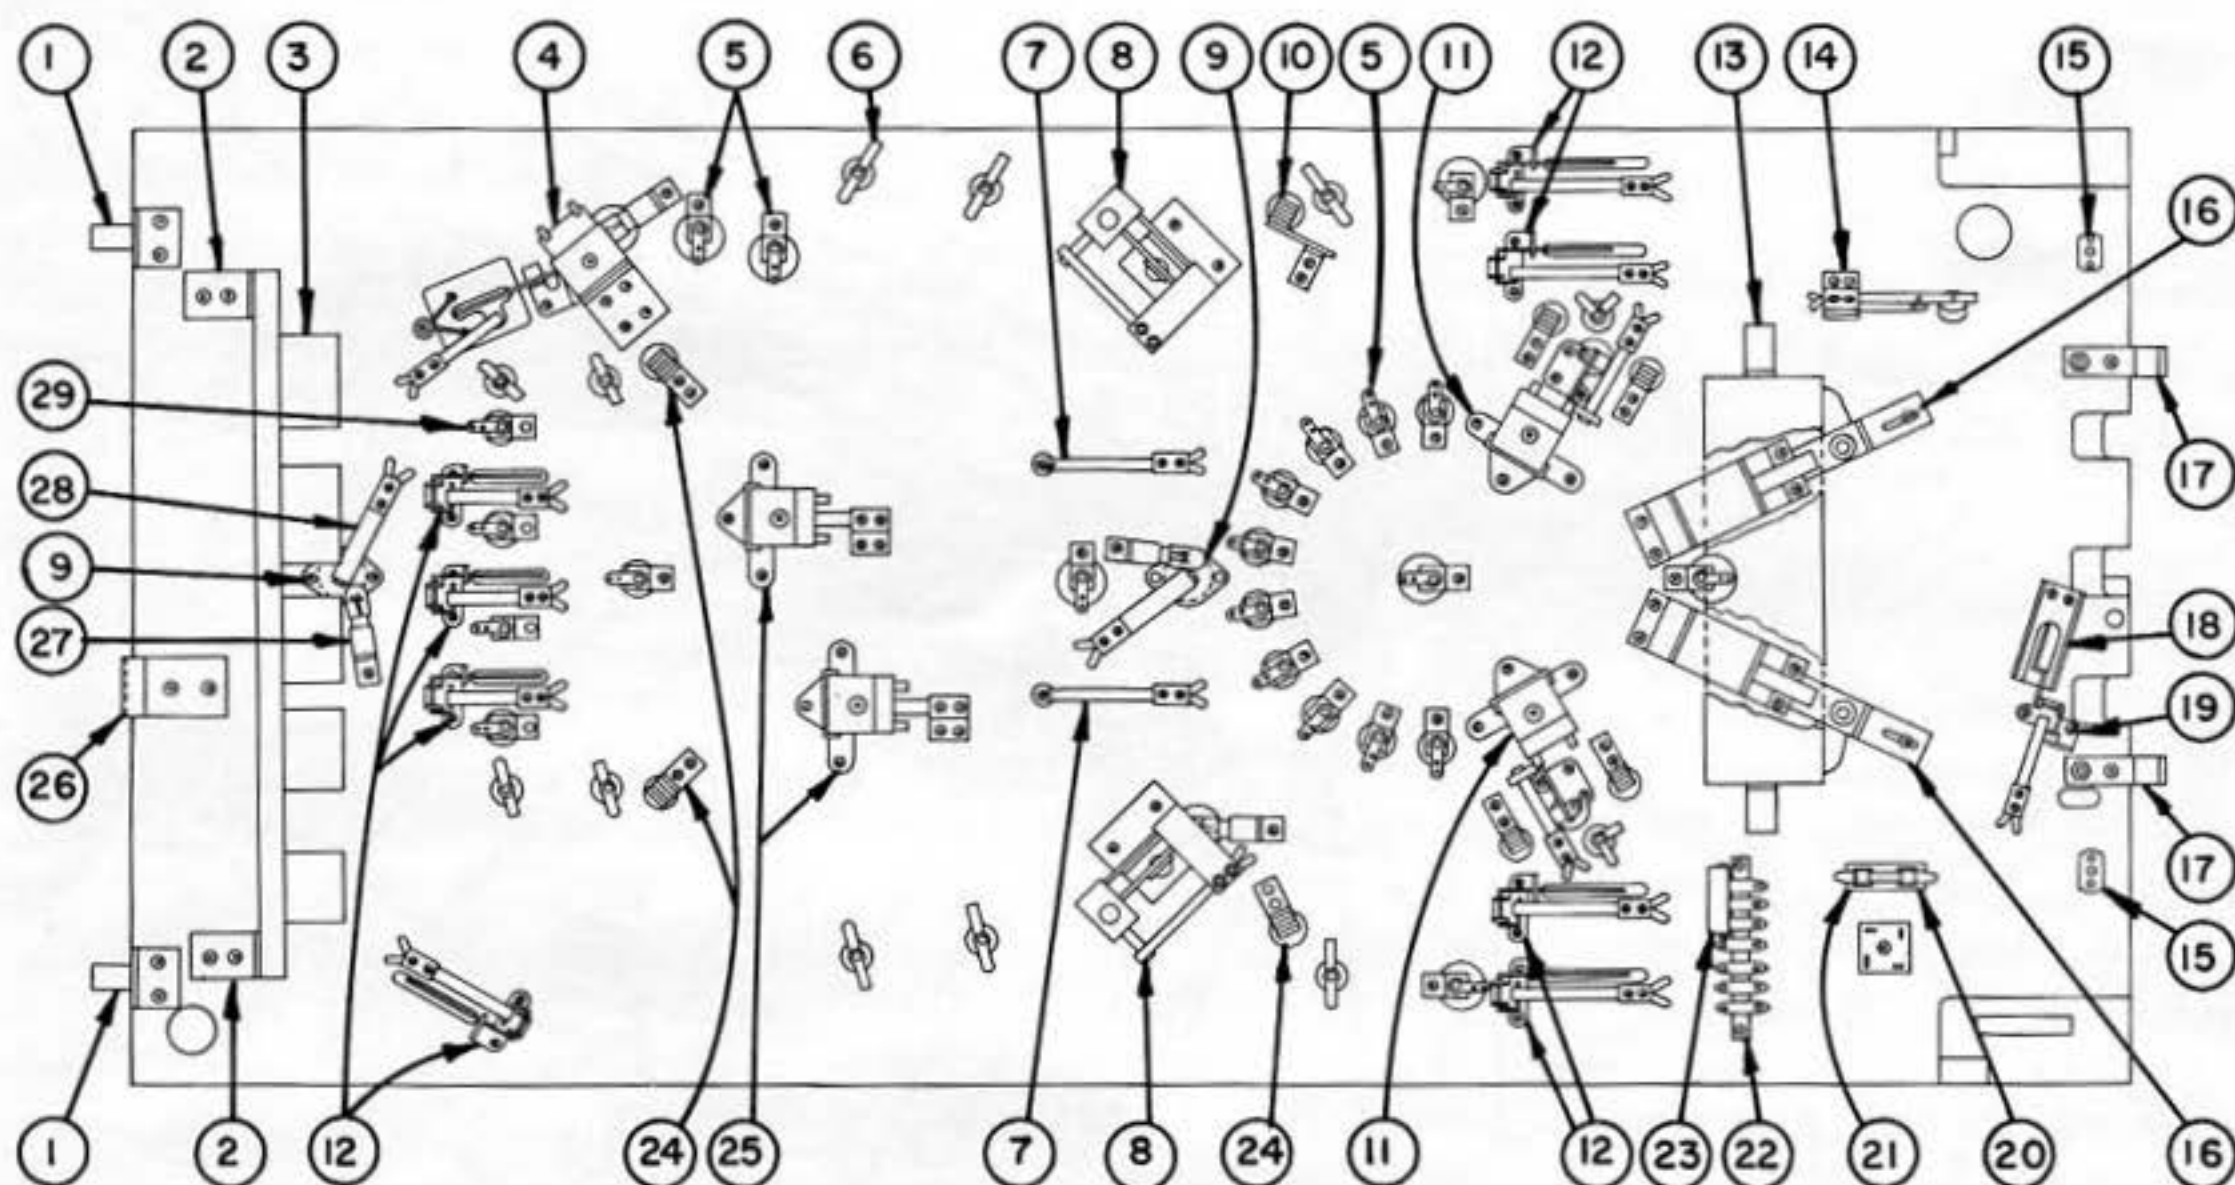


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	295-2529	PLAYFIELD LOCK ASS'Y	16		FLIPPER ASS'Y (SEE PAGE 9)
2	439-513	RELAY BOARD MOUNTING LEG	17	326-525	PLAYFIELD SUPPORT BRACKET
3		FOR ALL THESE RELAYS SEE PAGE 22	18		BALL EJECTOR UNIT (SEE PAGE 7)
4		BALL KICKER ASS'Y (SEE PAGE 12)	19	295-511	ROLL OVER MTG. BRACKET
5	#5240	BAYONET SOCKET (18-REQ'D.)		326-904	BALL EJECTOR WIRE FORM
	#5112	#47 BULBS IN ALL THE SOCKETS	20	#5608-1	RECTIFIER
6	#5232	BAYONET SOCKET (12-REQ'D.)	21	#5747-1	1 PLACE FUSE BLOCK ASS'Y
7	#392	CONTACT SWITCH ASS'Y		#5712-010	10 AMP. FUSE
	460-903	CONTACT ACTUATOR WIRE FORM	22	#8685-7	7 PLACE TERMINAL STRIP
8	460-2508-1&K	DROP TARGET ASS'Y (SEE PAGE 13)	23	#5607-A-1/200	1MFD 200 VDC CAPACITOR
9	408-2502	ROLL OVER BUTTON ASS'Y (SEE PAGE 17)	24	437-2506	CONTACT SWITCH & BRACKET ASS'Y
10	439-2513	CONTACT SWITCH & BRKT. ASS'Y	25	455-2518	THUMPER BUMPER ASS'Y
11		ACTION KICKER (SEE PAGE 11)	26	295-586	PLAYFIELD LIMIT BRACKET
12	295-2557	ROLL OVER WIRE FORM ASS'Y	27	#5206	BAYONET SOCKET
13	437-2507	FLIPPER COVER & LEG ASS'Y	28	393-514	FINGER STOP
14	339-514	TILT CONTACT BRACKET		#420	CONTACT SWITCH
	#302	TILT CONTACT SWITCH	29	#5231	BAYONET SOCKET
15	#6807	#8-32 "T" NUT			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

FLIPPER ASSEMBLY

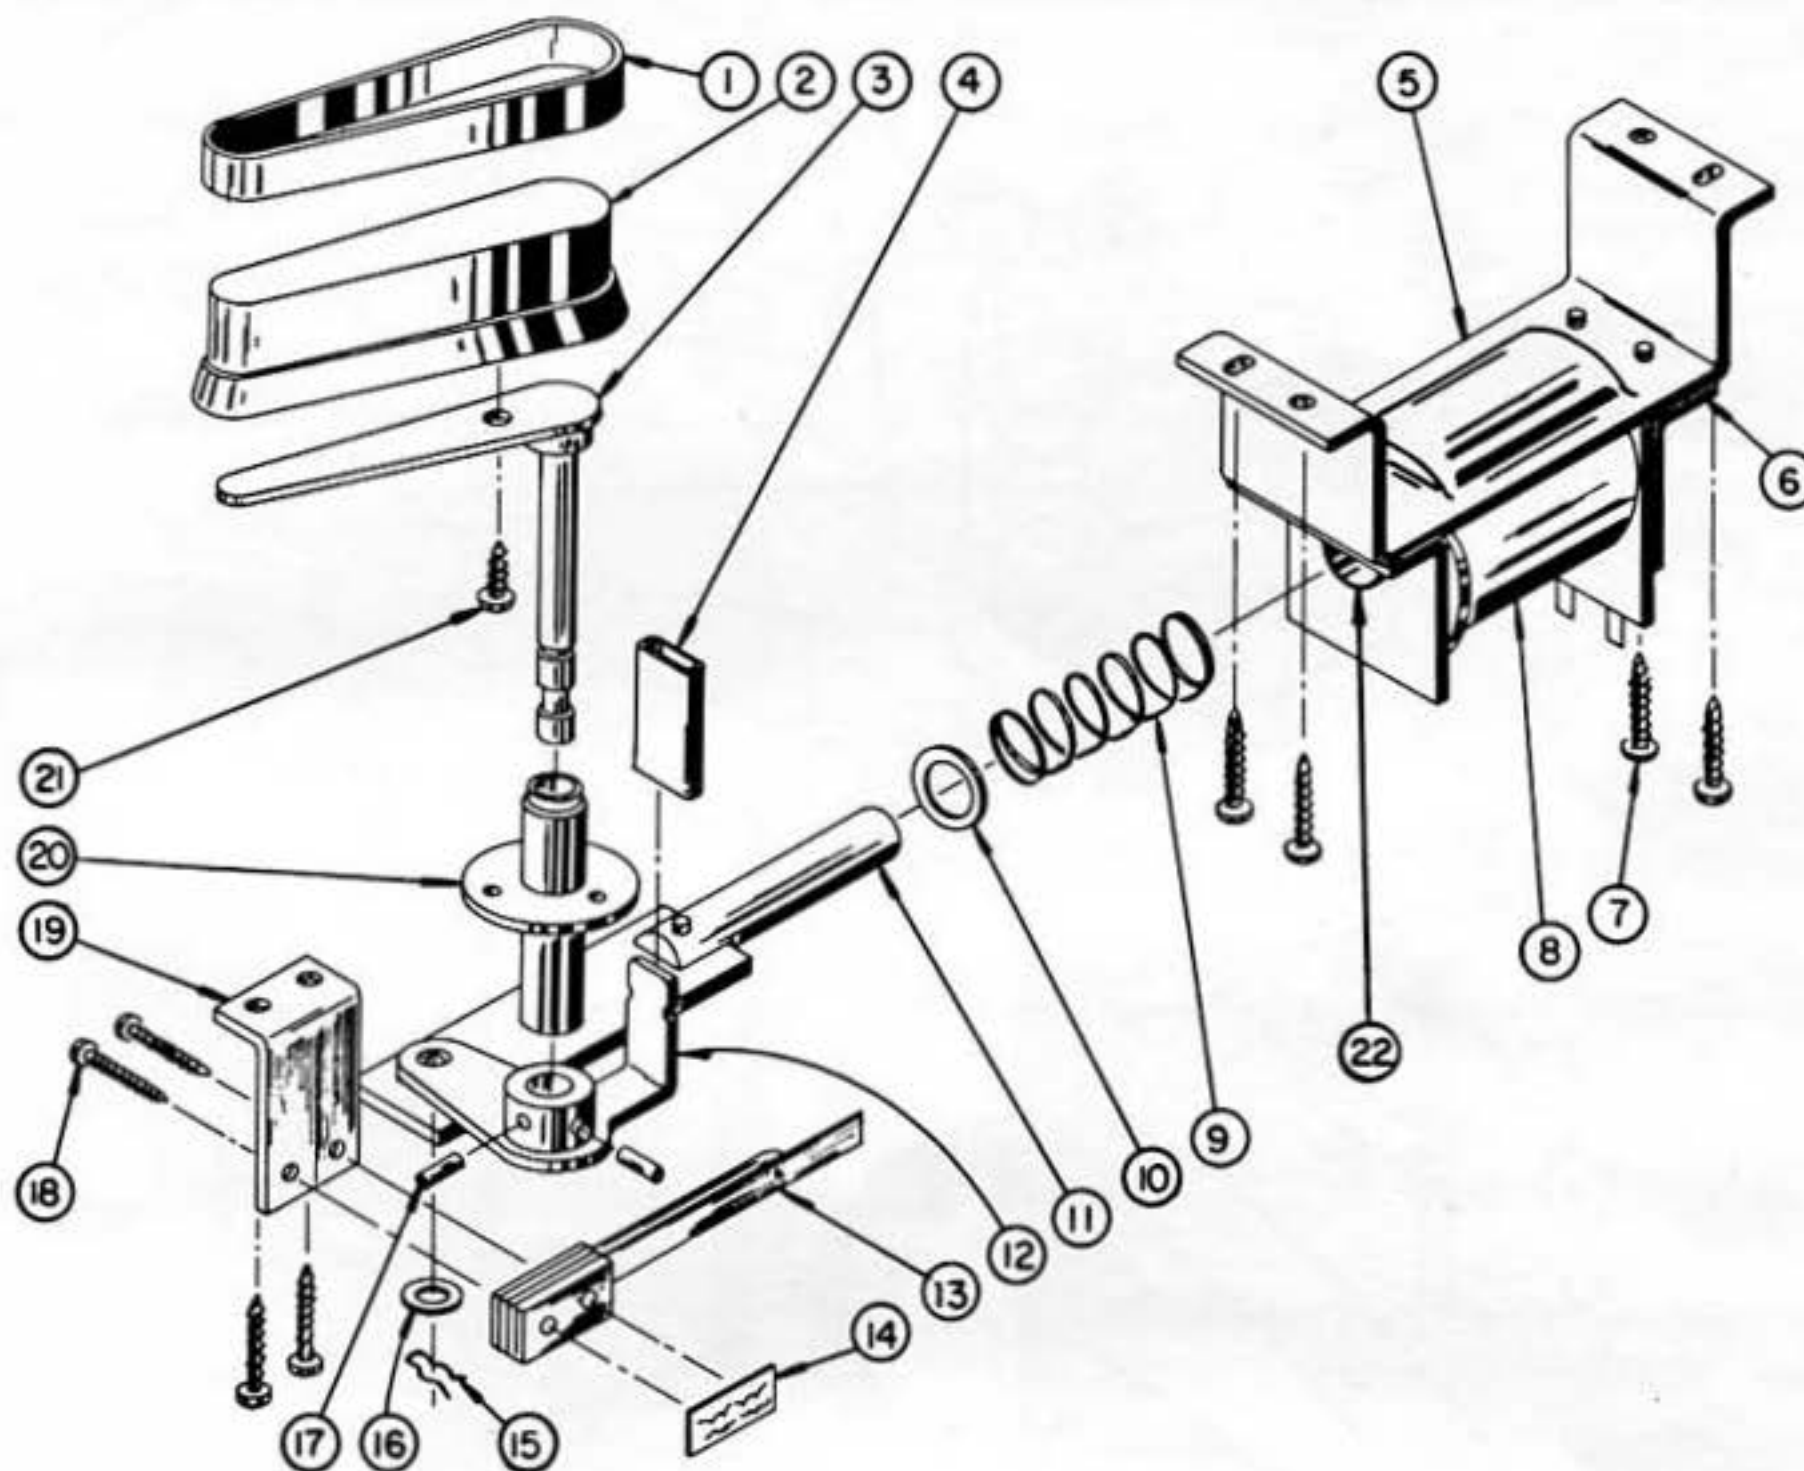


ITEM	PART NO.	DESCRIPTION
1	#6064	FLIPPER RUBBER RING
2	#16550	3" FLIPPER
3	393-2501	FLIPPER PLATE & SHAFT ASS'Y
4	#6527	1" LG. PLASTIC SLEEVING
5	347-2511	FLIPPER COIL MOUNTING BRACKET ASS'Y
6	347-2512	PLUNGER STOP ASS'Y
7		#6 x 1/2" LG. TYPE "A" RD. HD. PHILLIP S.M.S.
8	FJ-29-400	COIL COMPLETE
	21-375	
9	209-901	FLIPPER SPRING
10	#5348	WASHER
11	393-2504-G	FLIPPER PLUNGER & OPERATING LINK ASS'Y
12	231-2536-L	FLIPPER ARM ASS'Y
	231-2536-R	FLIPPER ARM ASS'Y (RIGHT HAND SHOWN)
13	#294-BR	CONTACT ASS'Y (SHOWN)
	#294-BL	CONTACT ASS'Y
14	#6770	TINNERMAN NUT
15	91-905	SPRING CLIP
16	#5357	WASHER
17		#10-32 x 1/2 LG. SOCKET HD. CAP SCREW
18		#4 S.M.S. (LENGTH AS REQUIRED)
19	295-559	CONTACT MOUNTING BRACKET
20	#16508-W	FLIPPER BUSHING
21		#6 x 7/16" LG. TYPE "E" TAPPING SCREW
22	130-1535	BRASS TUBING

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

THUMPER BUMPER ASSEMBLY

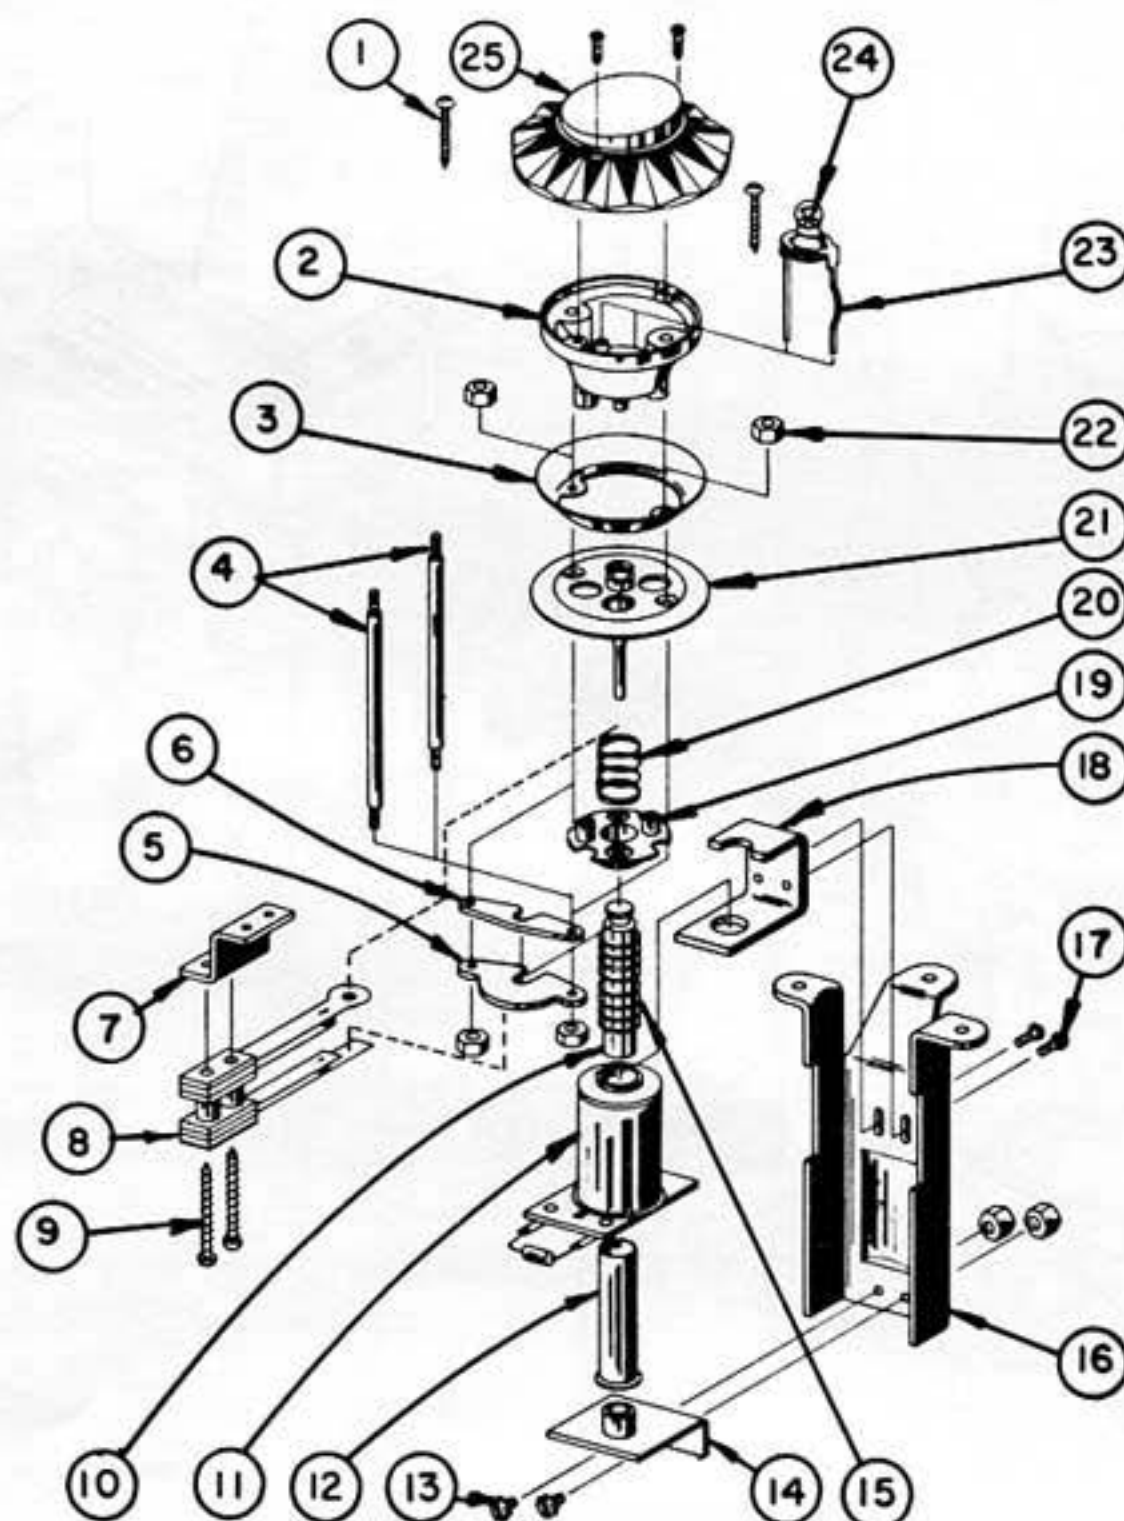


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	455-2518	COMPLETE THUMPER BUMPER ASS'Y	12	130-805	SOLENOID TUBING
1		#8 x 3/4 LG. RD. PHILLIP HD. SELF TAPPING SCREW	13		#6-32 x 3/8 LG. SEMS UNIT
2	#16511-W	THUMPER BODY	14	439-2510	PLUNGER STOP ASS'Y
3	312-504	THUMPER RING	15	437-900	SPRING (RED)
4	231-1507	POWER BUMPER RODS	16	393-508	COIL MTG. BRACKET
5	119-512	FIBER PLUNGER ARM	17		#6-32 x 1/4 LG. SEMS UNIT
6	119-503	BRASS PLUNGER ARM	18	119-502	COIL SUPPORT BRACKET
7	431-504	CONTACT MTG. BRACKET	19	#16512	BUMPER BASE
8	#433	SWITCH ASS'Y	20	3-119	SPRING
	#191-B	SWITCH ASS'Y	21	#16513-B-Y	WAFER THUMPER
9		#4 S.M.S. (LENGTH AS REQUIRED)	22	#6933-6	#6-32 ELASTIC STOP NUT
10	119-1507	PLUNGER	23	#5234	SOCKET
11	FJ-24-850	D.C. COIL COMPLETE	24	#5112	#47 BULB
	#5612-4004	DIODE	25	#16563-B	YELLOW 100 DIAMOND SUNFLOWER CAP

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

ACTION KICKER

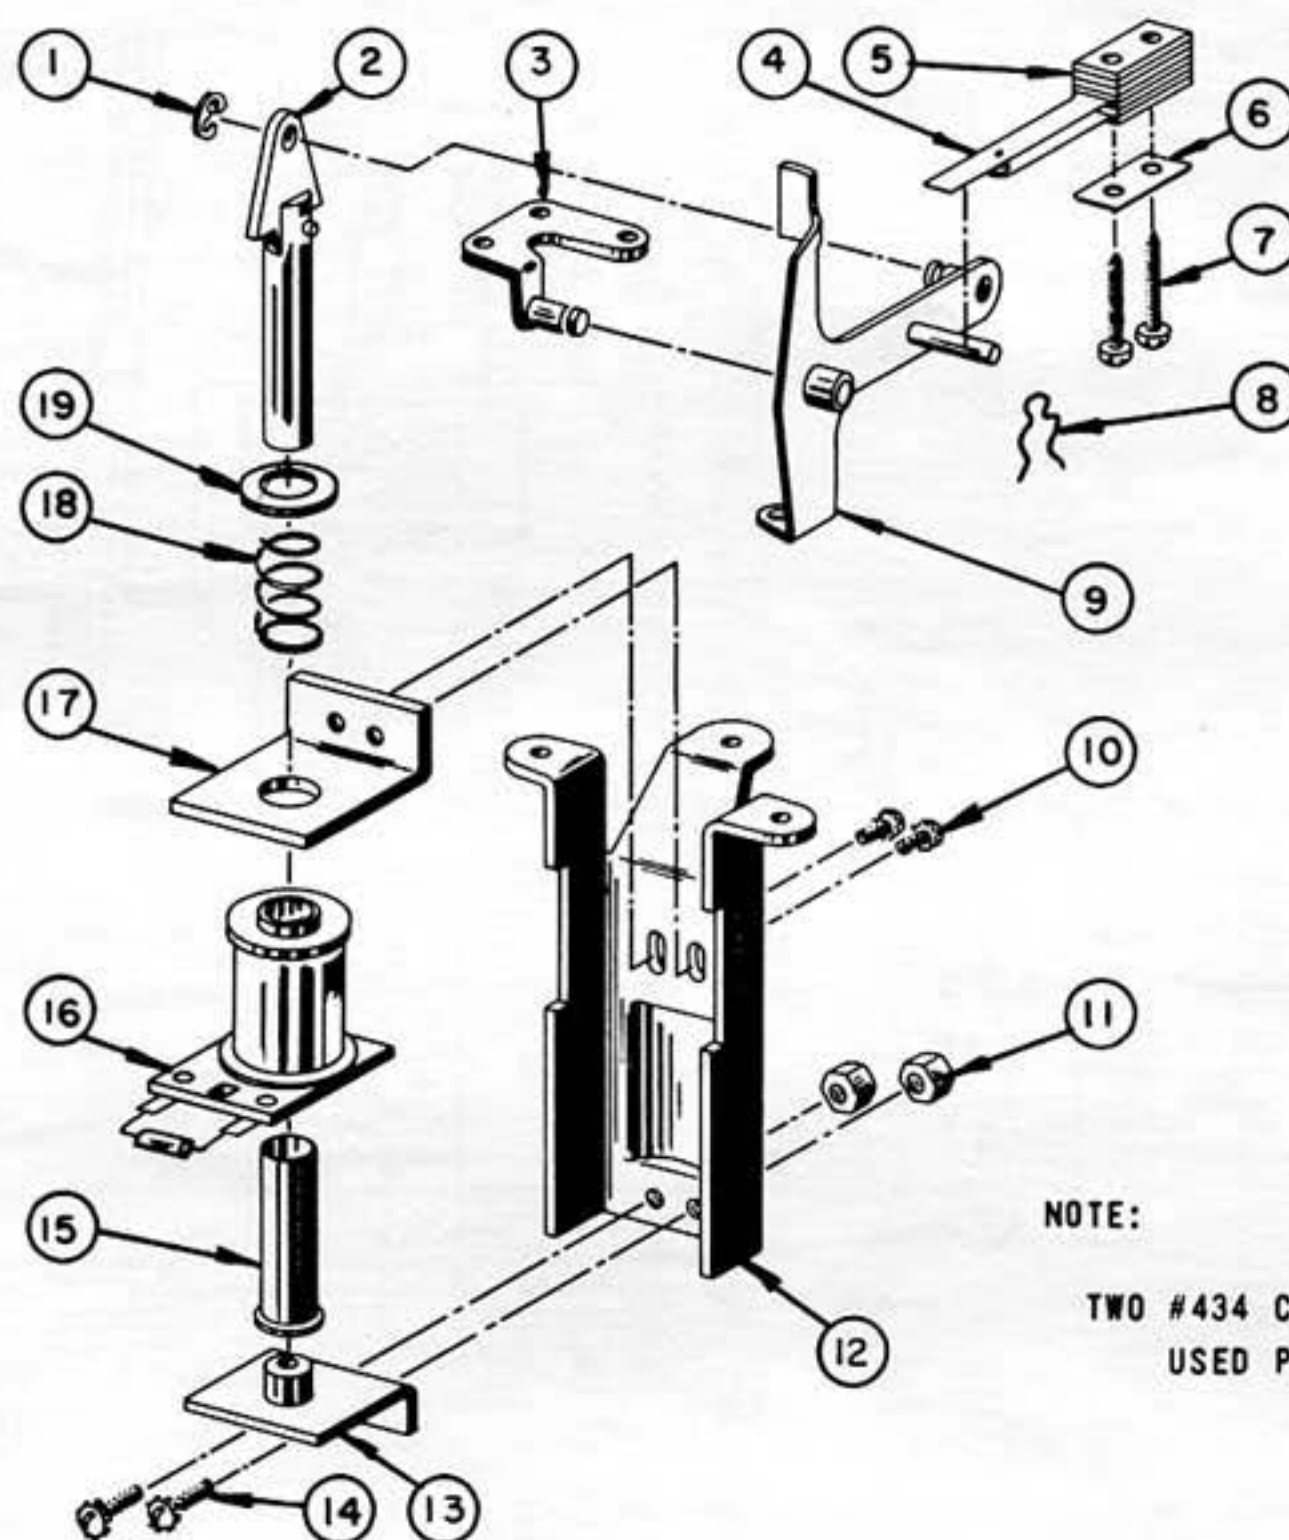

NOTE:


TWO #434 CONTACT SWITCHES
USED PER KICKER

ITEM	PART NO.	DESCRIPTION
1	#6722X21	RETAINING RING
2	295-2513	PLUNGER & LINK ASS'Y
3	295-2509	KICKER ARM BRACKET ASS'Y
4	#26	SWITCH ASS'Y
5	#43	SPACER BLOCK
6	#6771	TINNERMAN SPACER
7		#4 X 1" LG. S.M.S.
8	91-805	SPRING CLIP
9	331-2510	KICKER ARM ASS'Y (WITH POST)
10		#6-32 X 1/4" LG. SEMS UNIT
11		#6-32 HEX NUT
12	393-508	COIL MOUNTING BRACKET
13	439-2510	PLUNGER STOP ASS'Y
14		#6-32 X 3/8" LG. SEMS UNIT
15	130-805	SOLENOID TUBING
16	FJ-25-1050	D.C. COIL COMPLETE
	#5612-4004	DIODE
17	347-508	COIL SUPPORT BRACKET
18	209-901	SPRING
19	#5348	WASHER

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

DROP TARGET UNIT

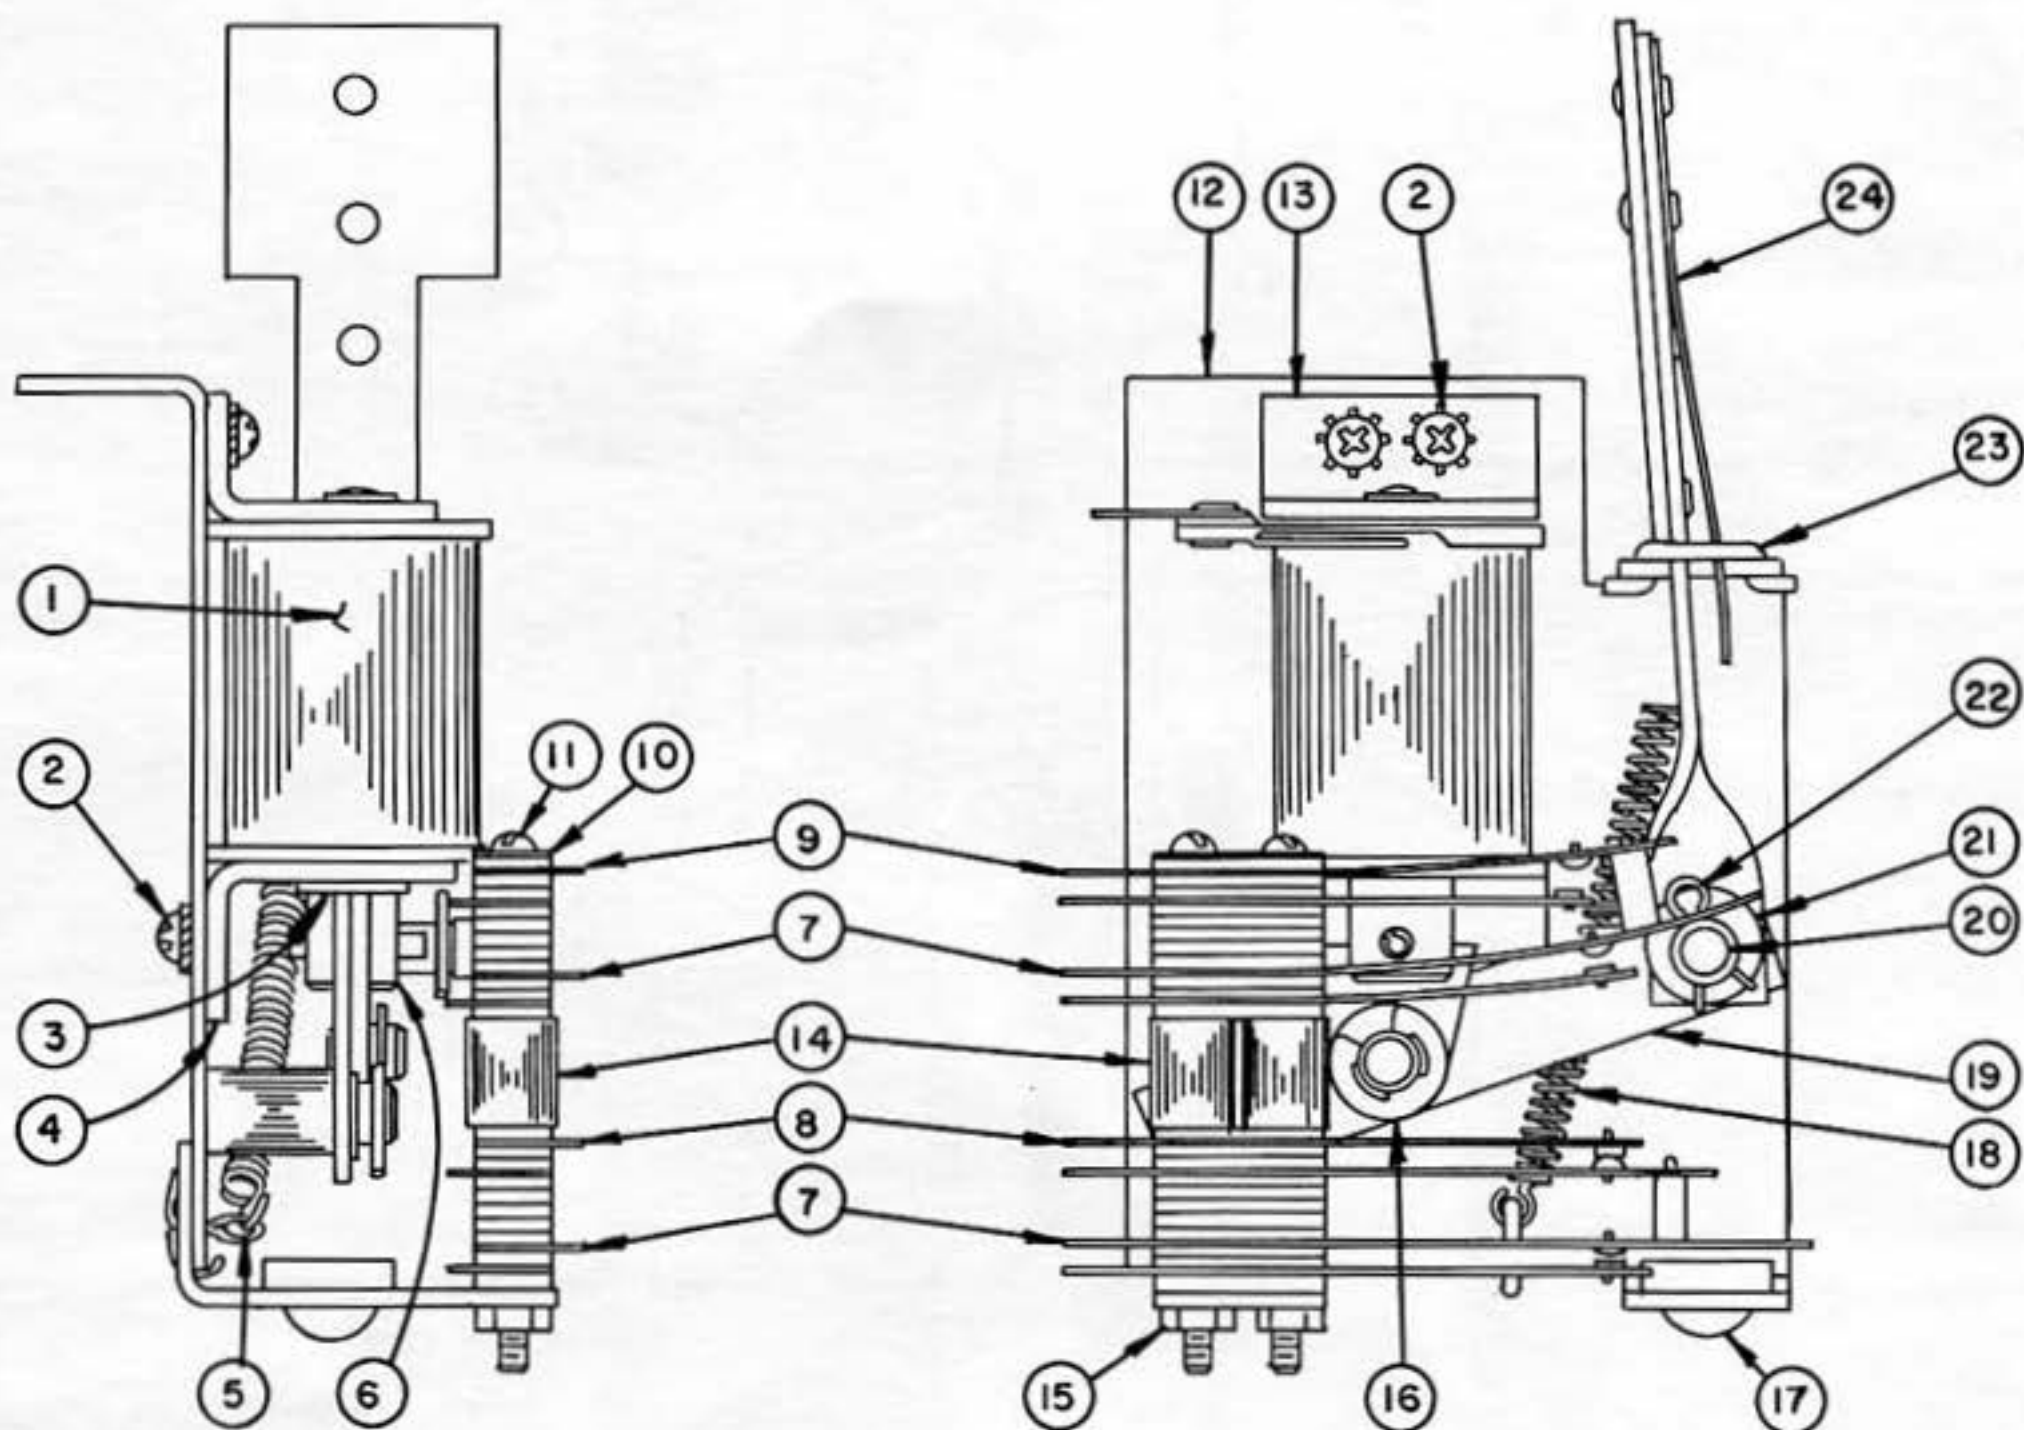


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	460-2508-1&K	COMPLETE DROP TARGET ASS'Y	13	347-2512	PLUNGER STOP ASS'Y
1	J-22-550	COIL COMPLETE	14	#16552-8-1	PLASTIC SPACER
2		#6-32 x 1/4 LG. SEMS UNIT	15		#4-36 HEX NUT
3	130-1536	SOLENOID TUBE	16	#6722-25	RETAINING RING
4	347-508	COIL SUPPORT BRACKET	17	#6079	RUBBER BUMPER
5	#6753-8	3/32 DIA. x 1/2" LG. COTTER PIN	18	300-901-A	SPRING
6	439-2509	PLUNGER & LINK ASS'Y	19	439-2504	DROP TARGET RESET ARM ASS'Y
7	#437	CONTACT SWITCH ASS'Y	20	#6527	3/4" LG. PLASTIC SLEEVE
8	#437-C	CONTACT SWITCH ASS'Y	21	#5330	WASHER
9	#437-B	CONTACT SWITCH ASS'Y	22	91-905	SPRING CLIP
10	#6771	TINNERMAN SPACER	23	439-904	TARGET ARM RETAINER
11		#4-36 x 2-3/4 LG. RD. HD. M.S.	24	460-2504-1&K	DROP TARGET ASS'Y
12	439-2503	DROP TARGET MTG. BRACKET ASS'Y			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


BALL KICKER UNIT

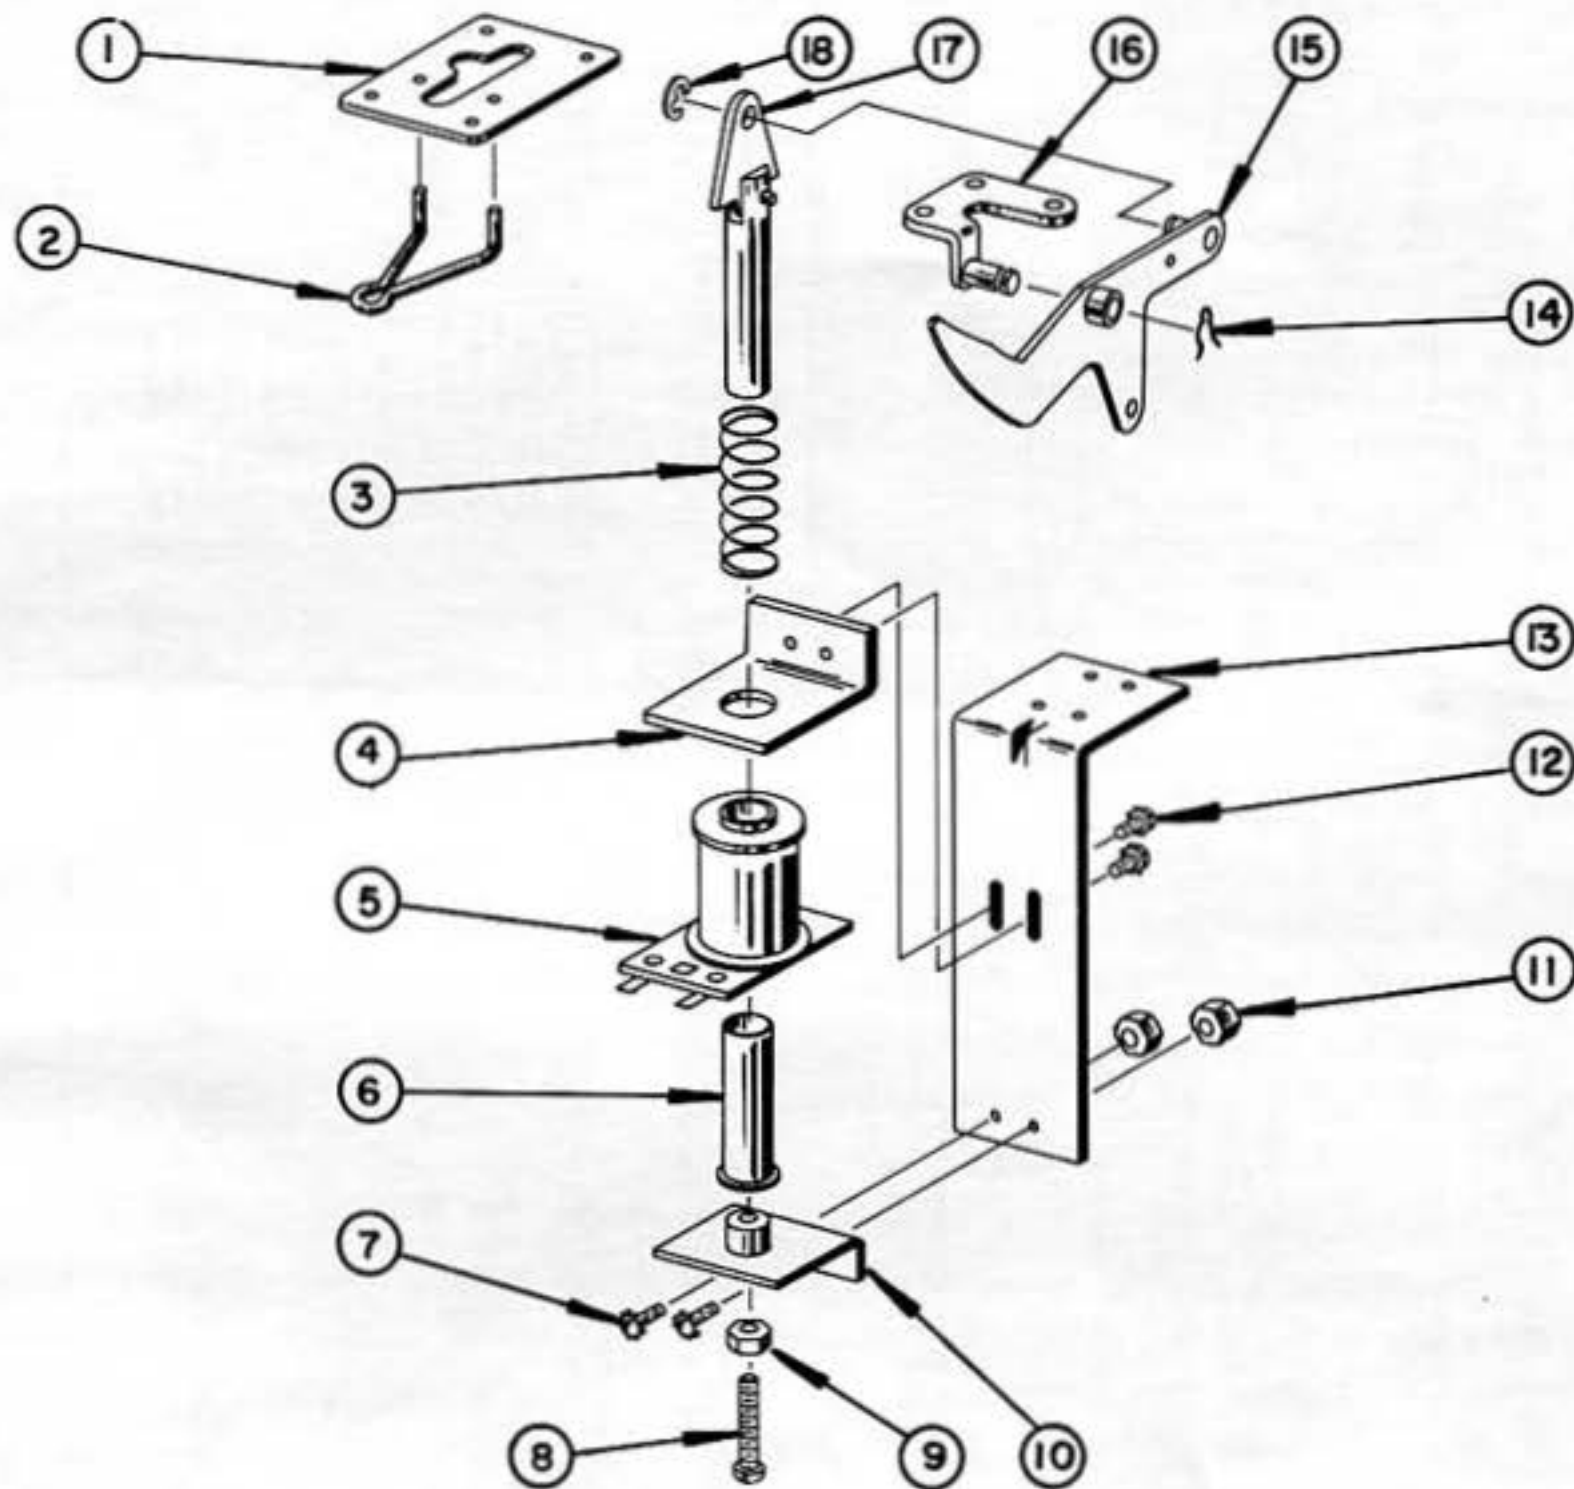

ITEM	PART NO.	DESCRIPTION
1	#16549	KICKER PAD
2	393-900	BALL KICK-OUT HOLE WIRE FORM
3	209-901	SPRING
4	347-508	COIL SUPPORT BRACKET
5	FJ-26-800	COIL COMPLETE
6	130-805	SOLENOID TUBING
7		#6-32 x 3/8 LG. SEMS UNIT
8		#10-32 x 1-1/8" LG. BRASS R.H.M.S.
9		#10-32 HEX NUT
10	124-2500	PLUNGER STOP ASS'Y
11		#6-32 HEX NUT
12		#6-32 x 1/4" LG. SEMS UNIT
13	347-506	COIL MTG. BRACKET
14	91-905	SPRING CLIP
15	295-2510	KICKER ARM ASS'Y
16	295-2509	KICKER ARM BRACKET ASS'Y
17	295-2513	PLUNGER & LINK ASS'Y
18	#6749	RETAINING RING


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

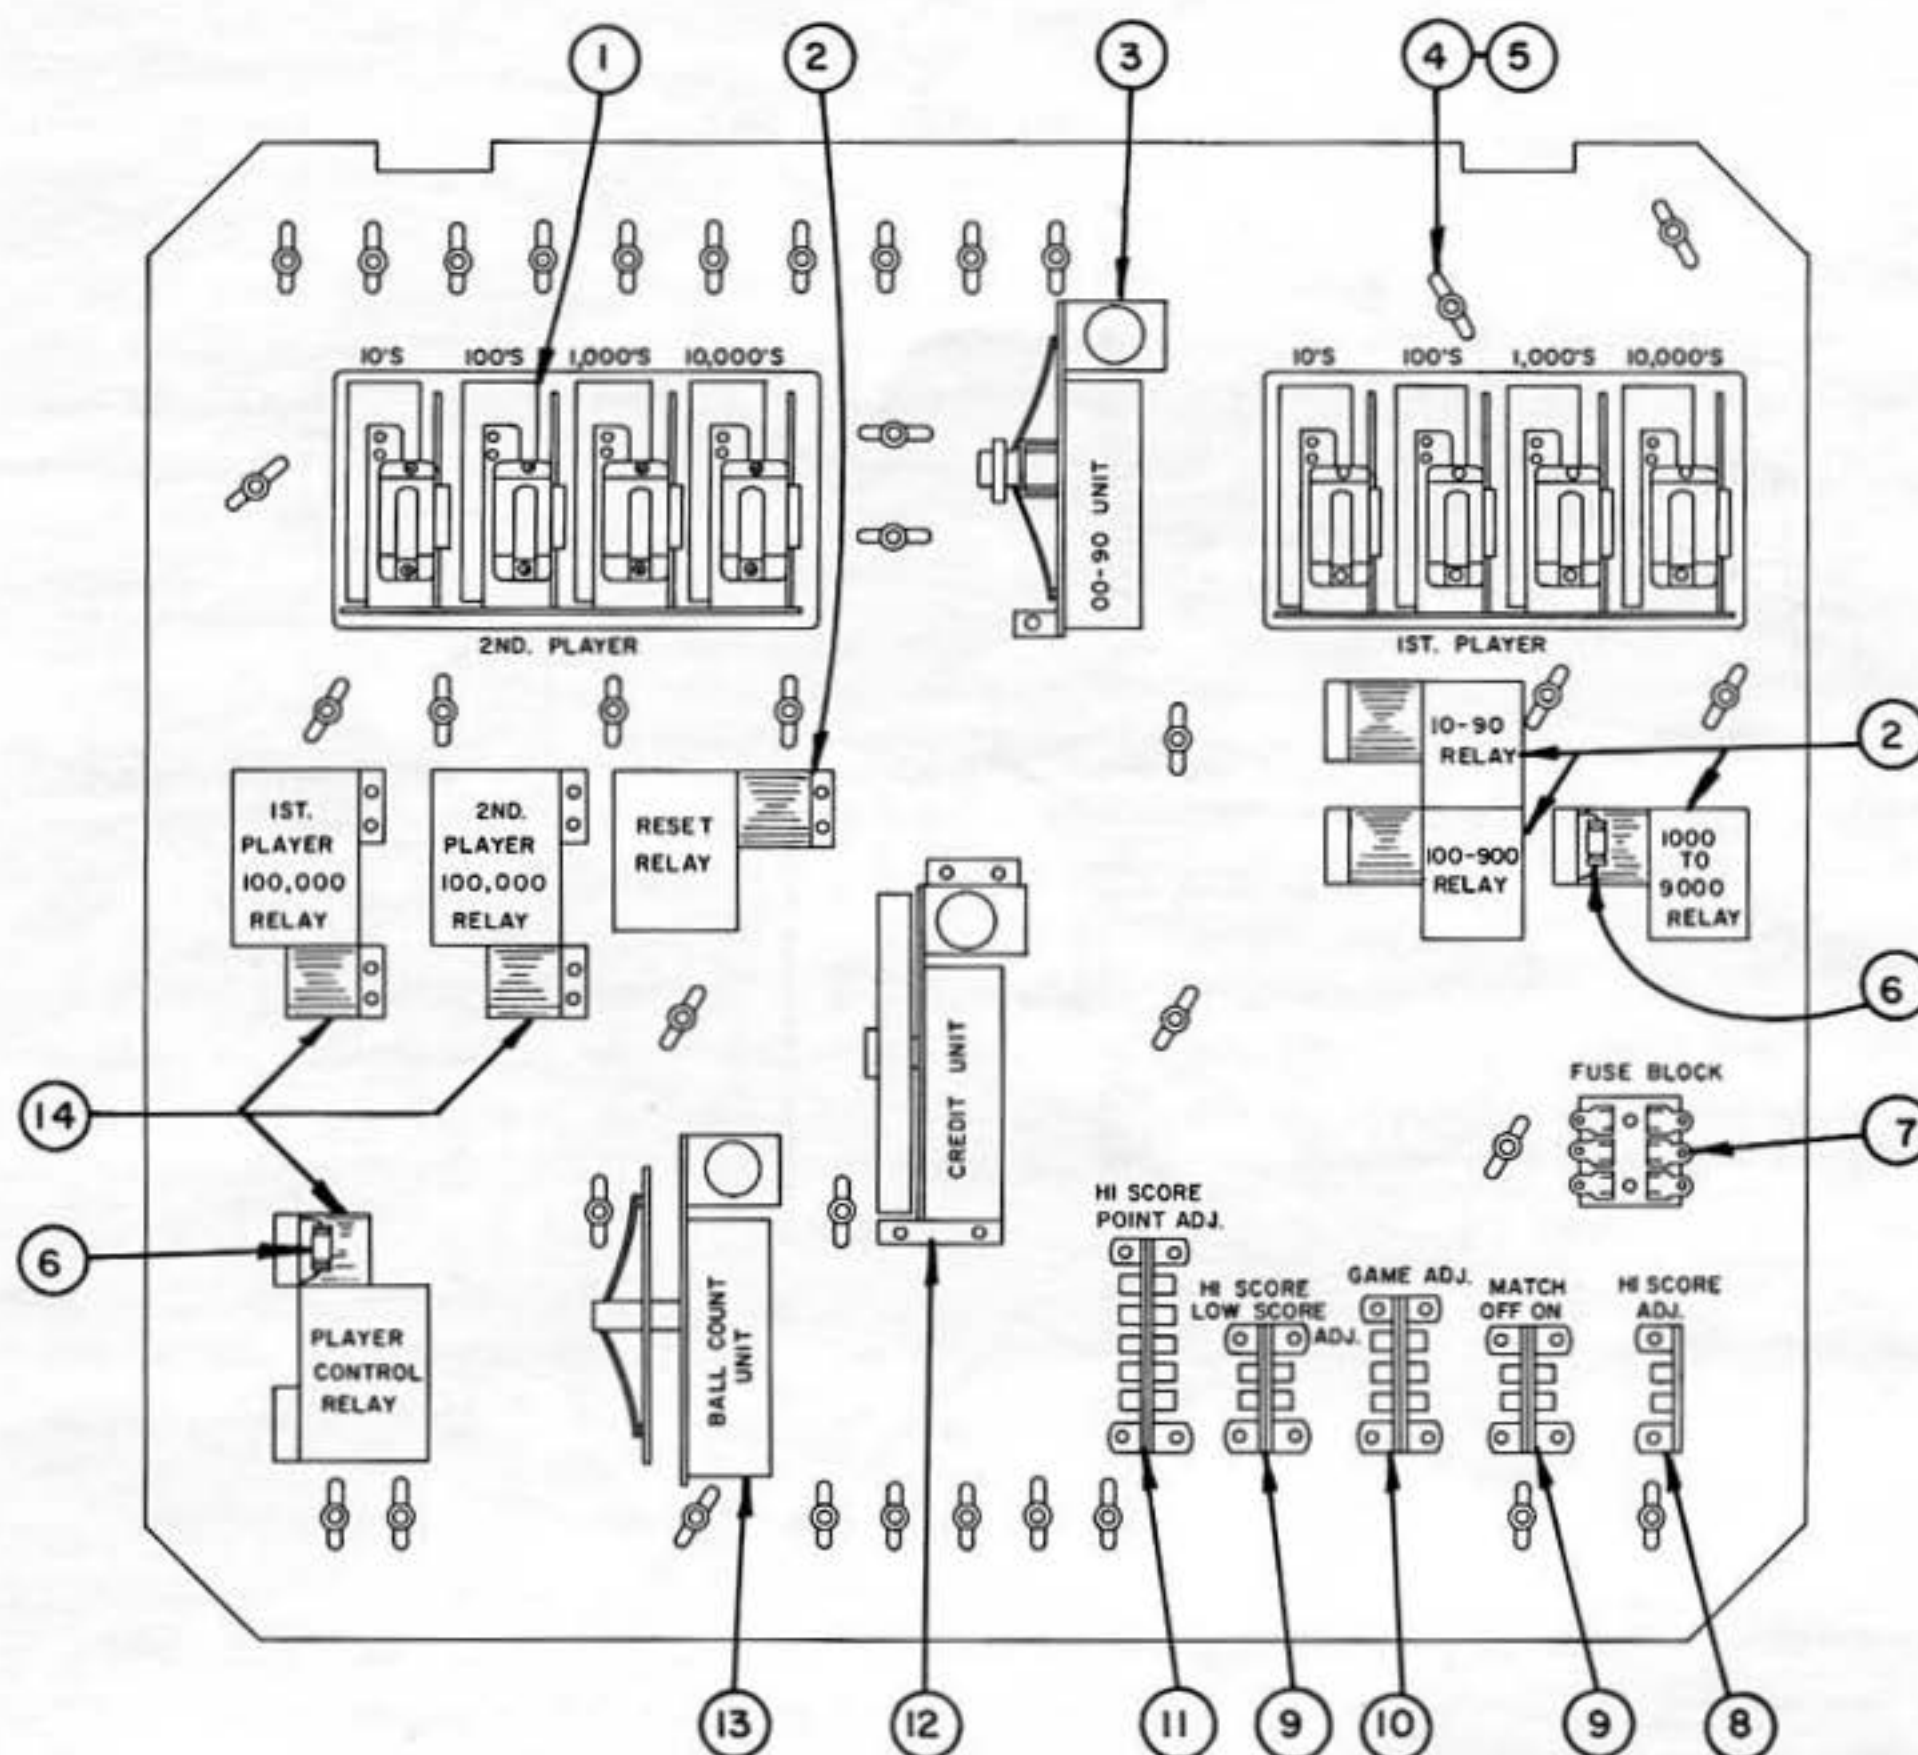


ITEM	PART NO.	DESCRIPTION
1		SCORING DRUM UNIT (SEE PAGE 24)
2		FOR THESE RELAYS SEE PAGE 23
3	130-2571-B	00-90 UNIT (SEE PAGE 19)
4	#5232	BAYONET SOCKET
5	#5112	#47 BULB
6	#5607-A-4.7/50	NON POLARIZED CAPACITOR
7	#5747-3	3 PLACE FUSE BLOCK ASS'Y
8	#5816	2 POINT INLINE SOCKET
9	#5876	4 POINT REGULAR SOCKET
10	#5877	6 POINT REGULAR SOCKET
11	#5879	10 POINT REGULAR SOCKET
12	130-2532-C	CREDIT UNIT (SEE PAGE 20)
13	130-2568-B	BALL COUNT UNIT (SEE PAGE 21)
14		FOR THESE RELAYS SEE PAGE 22

SUB PANEL

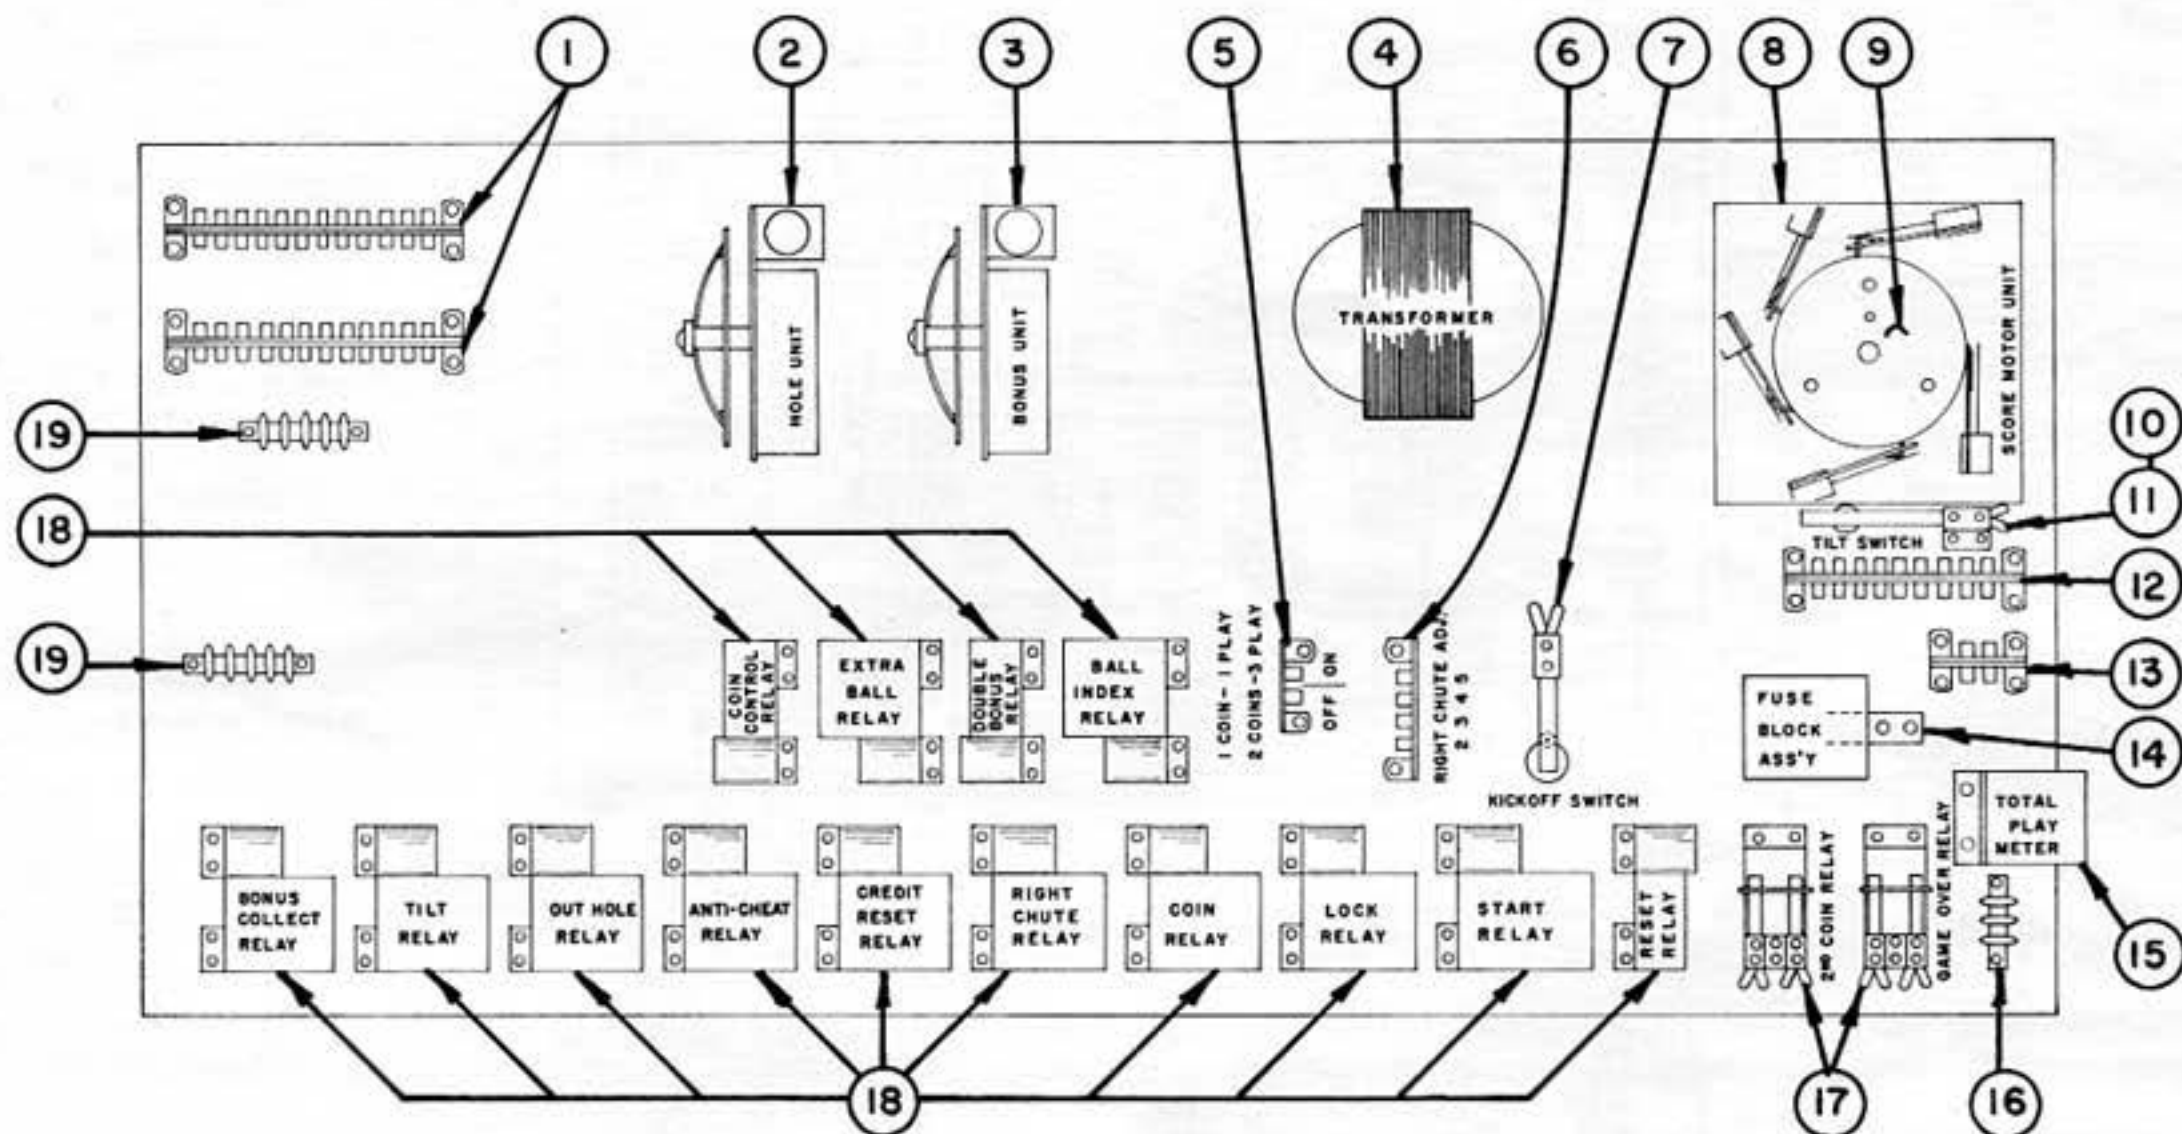

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	#5885	24 POINT REGULAR SOCKET	8	#5750-2334	SCORE MOTOR (50 Hz 22 R.P.M.)
2	130-2568-A	HOLE UNIT (SEE PAGE 21)	9	455-2509	SCORE MOTOR CAM ASS'Y
3	130-2519-A	BONUS UNIT (SEE PAGE 18)	10	431-504	CONTACT BRACKET
4	#5666-2518	TRANSFORMER (SEE PAGE 28)	11	#302	TILT SWITCH
5	#5816	2 POINT INLINE SOCKET	12	#5883	18 POINT REGULAR SOCKET
6	#5821	4 POINT INLINE SOCKET	13	#5876	4 POINT REGULAR SOCKET
7	#16520	KICK OFF SWITCH BUSHING	14	431-2504	5 PLACE FUSE BLOCK & MTG. BRKT. ASS'Y
	295-1514	PLUNGER	15	#5707	TOTAL PLAY METER
	#6722-25	RETAINING RING	16	#6685-3	3 PLACE TERMINAL STRIP
	#194	KICK OFF SWITCH	17		FOR THESE RELAYS SEE PAGE 23
8	460-2500	COMPLETE SCORE MOTOR ASS'Y	18		FOR THESE RELAYS SEE PAGE 22
	460-2507	SCORE MOTOR MTG. PLATE ASS'Y	19	#6685-5	5 PLACE TERMINAL STRIP
	#5750-2333	SCORE MOTOR (60 Hz 22 R.P.M.)			

TILT BOARD & KNOCKER ASSEMBLY

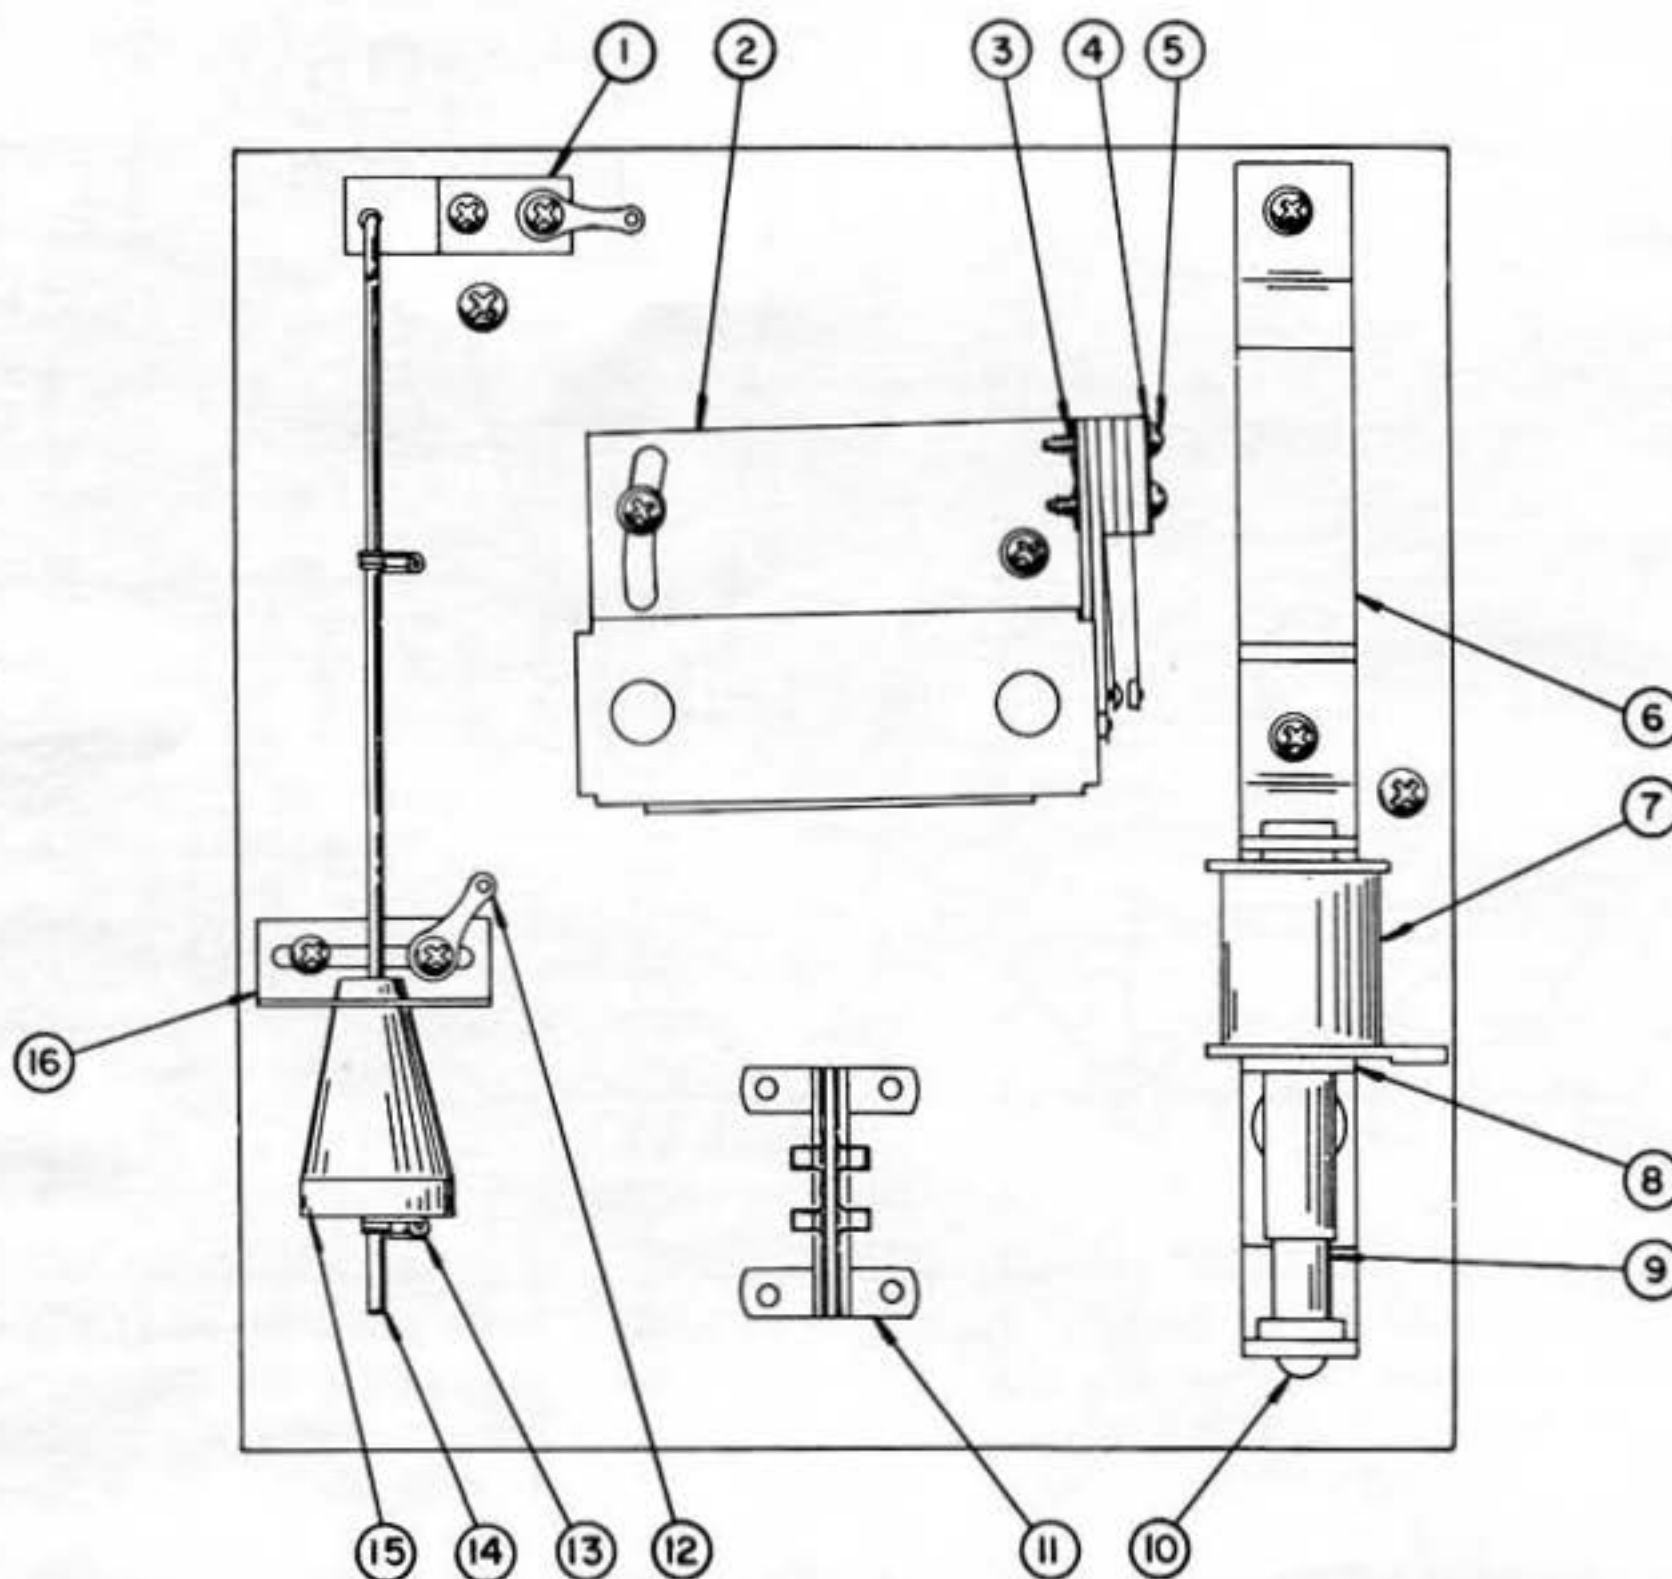


ITEM	PART NO.	DESCRIPTION
1	295-557	TILT PLUMB HANGER
2	339-511	ELEVATOR TILT
3	#6770	TINNERMAN NUT
4	#6771	TINNERMAN SPACER
5		#4 X 5/8" LG. S.M.S.
6	295-2538	KNOCKER MOUNTING BRACKET ASS'Y
7	N-26-1000	COIL COMPLETE
8	167-511	ADJ. COIL SUPPORT BRACKET
9	167-2507	PLUNGER & TIP ASSEMBLY
10	#6079	RUBBER GROMMET
11	#5876	4 POINT REGULAR SOCKET
12	#6654	SOLDERING LUG
13	231-907	TILT PLUMB SPRING
14	295-906	TILT PLUMB WIRE
15	295-1513	TILT PLUMB
16	295-556	TILT PLUMB CONTACT PLATE

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


CHIME ASSEMBLY

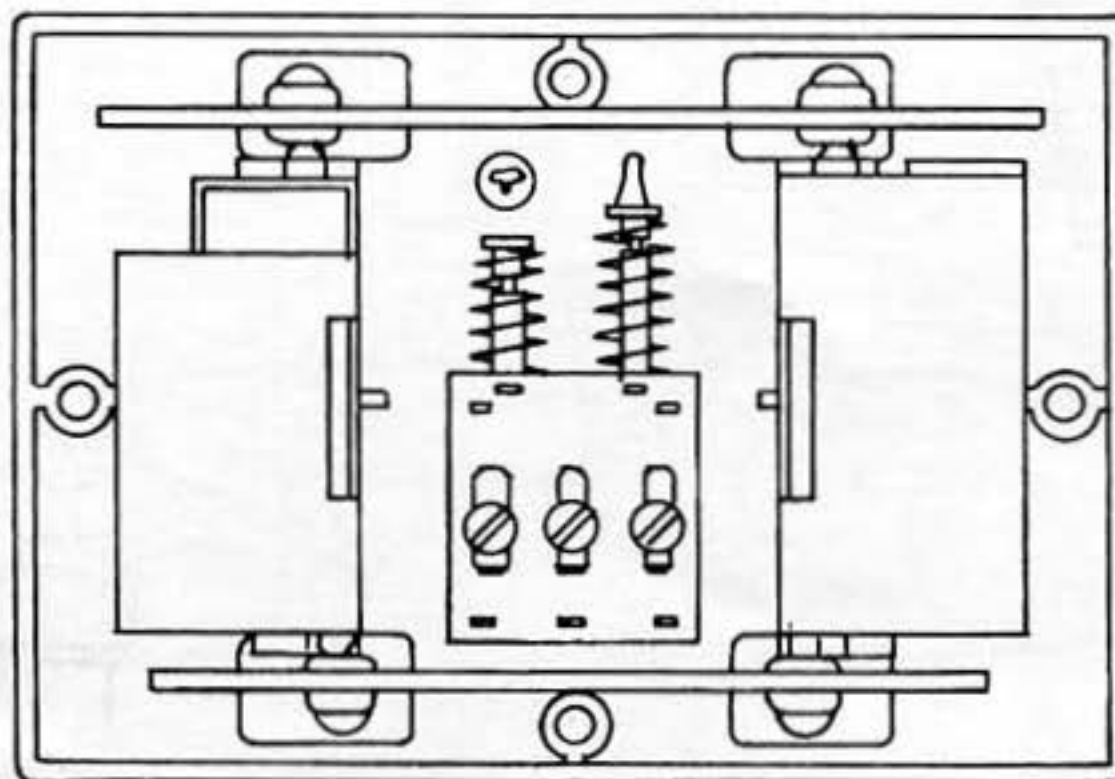

CHIME #5635

408-2502


COMPLETE (INCLUDES 5 ITEMS UNDER LINED)

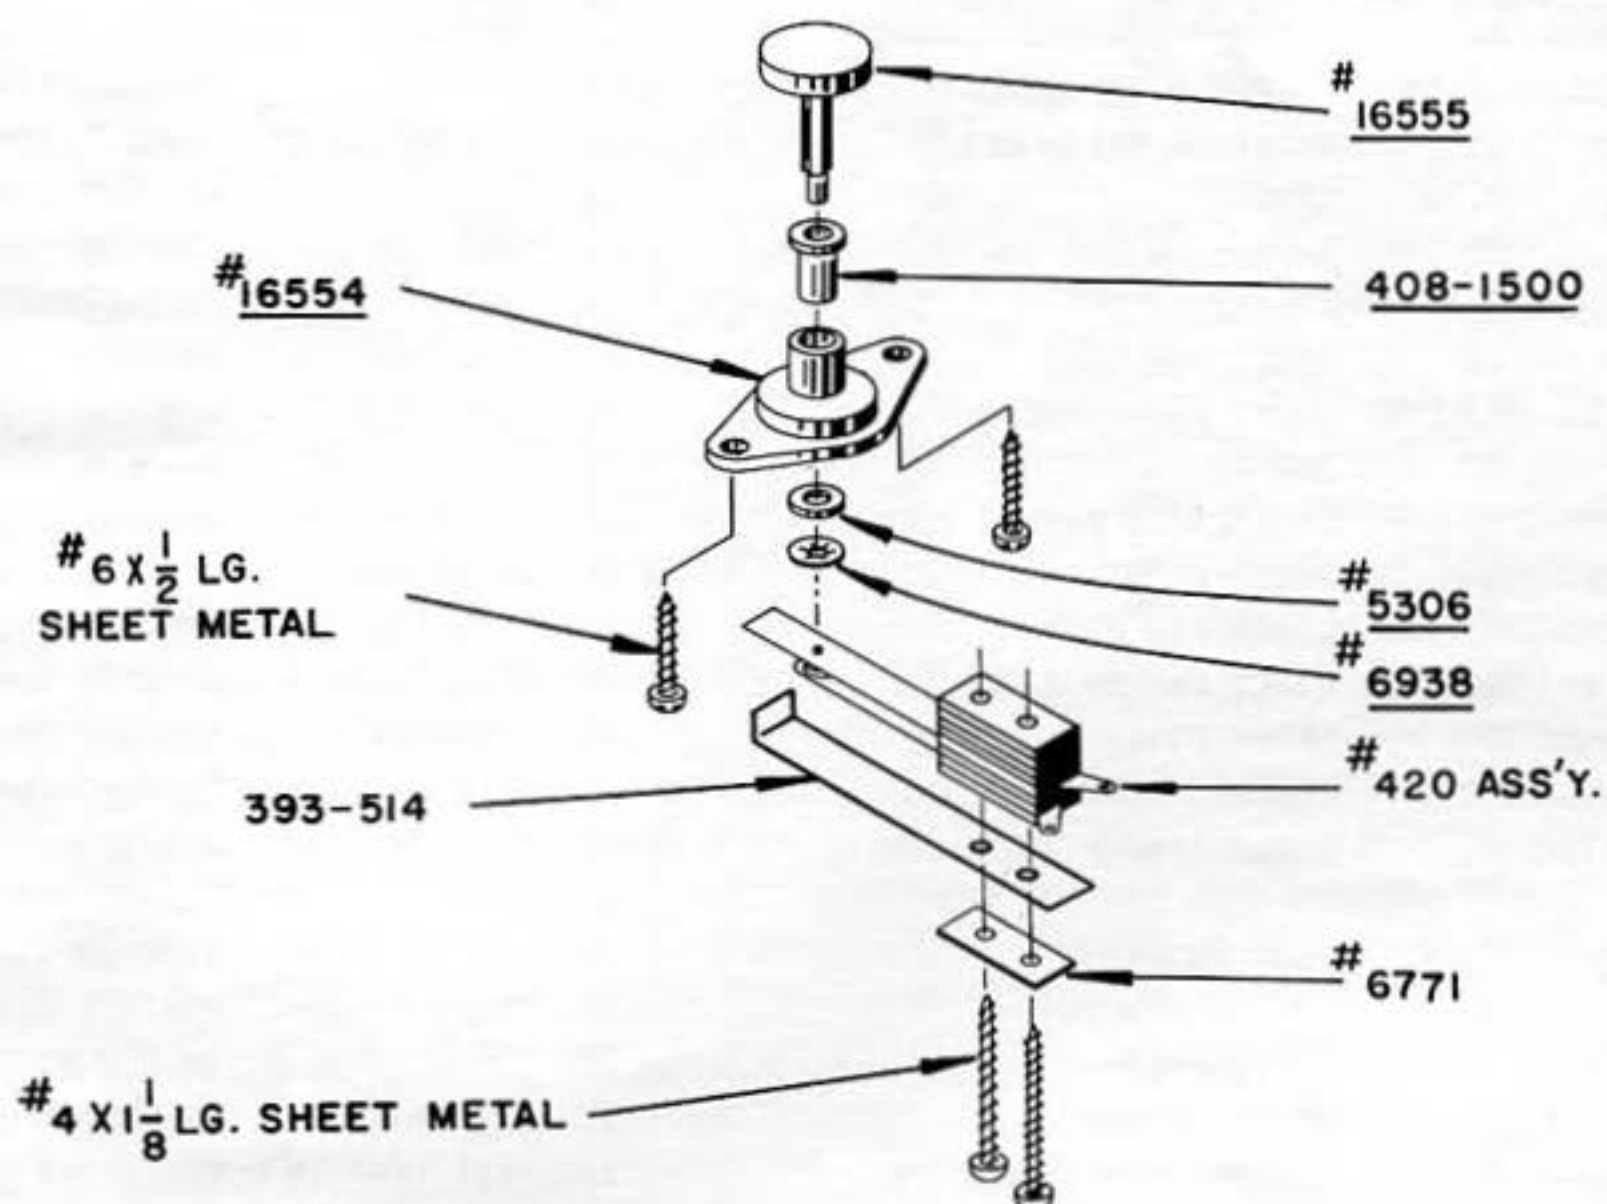

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

BONUS UNIT

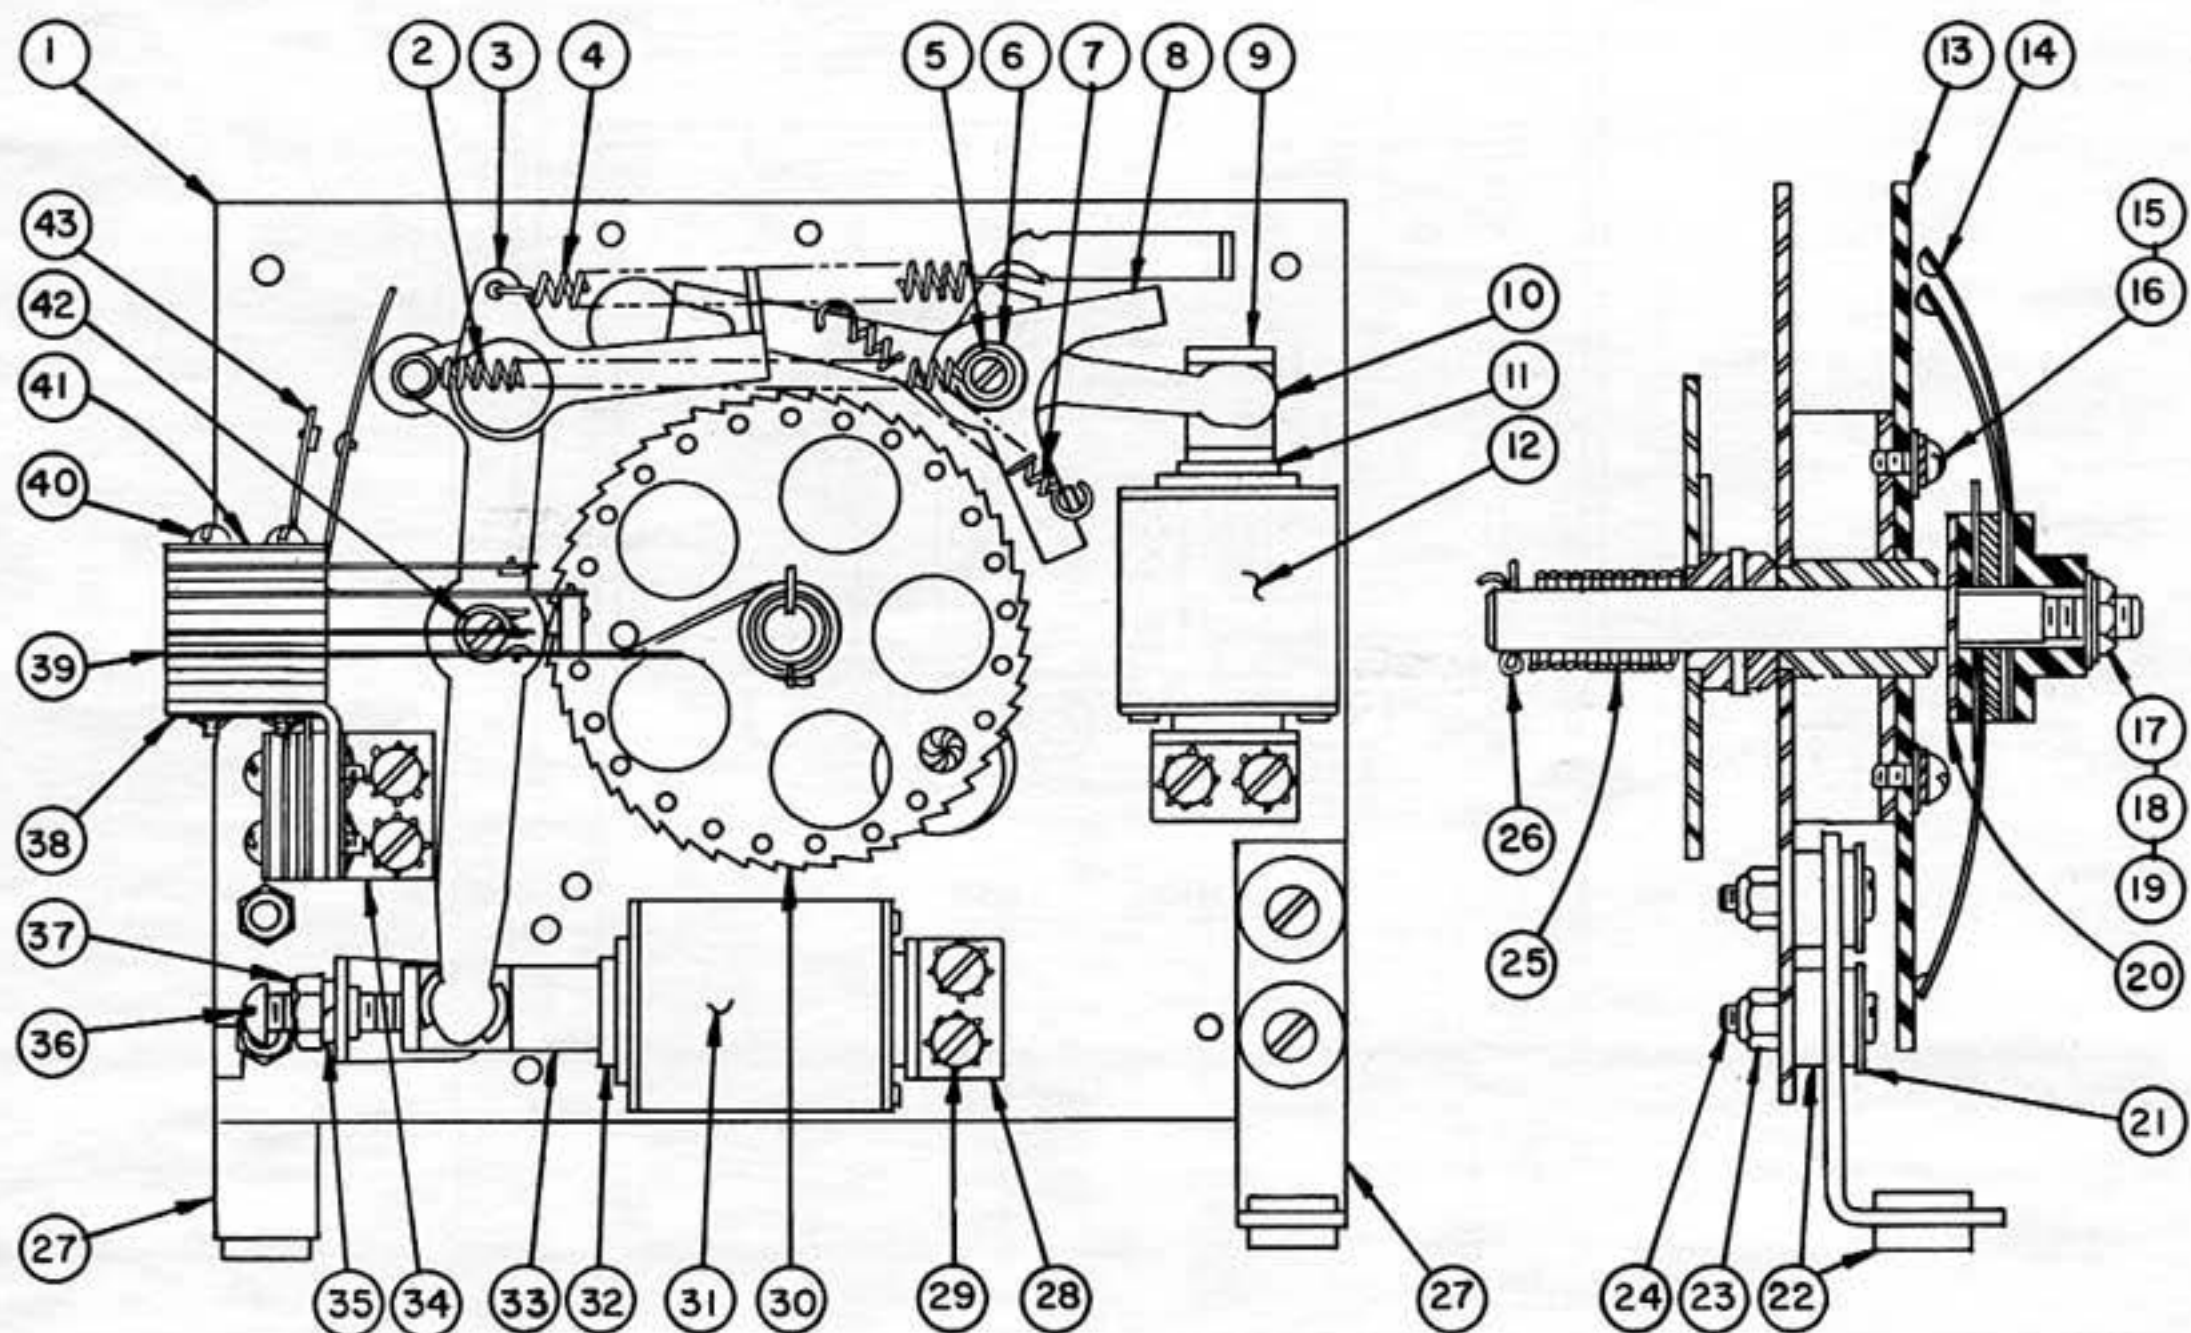


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2519-AG	COMPLETE BONUS UNIT (19 STEPS)	22	#6096	RUBBER GROMMET
1	130-2502	MOUNTING PLATE ASS'Y	23		#8-32 ELASTIC STOP NUT
2	130-910-18	SPRING	24		#8-32 x 3/4" LG. PAN HD. M.S.
3	130-2511	OPERATING ARM ASS'Y	25	130-905	TORSION SPRING
4	130-901	SPRING	26	#6752-10	COTTER PIN
5	130-1510	RESET ARM POST	27	130-599	MOUNTING LEG
6	130-1517	RESET ARM BUSHING	28	130-2516	PLUNGER STOP ASS'Y
7	129-900	SPRING	29		#6-32 x 1/4 LG. SEMS UNIT
8	130-2514	ESCAPEMENT PAWL & BUSHING	30	130-2542-20	RATCHET & POST ASS'Y
9	91-1507	RESET PLUNGER	31	J-22-550	STEP-UP COIL
10	130-2513	RESET ARM ASS'Y	32	130-1535	STEP-UP SOLENOID TUBING
11	130-1536	RESET SOLENOID TUBING	33	91-1538	STEP-UP PLUNGER
12	H-26-650	RESET COIL	34	130-511	DOUBLE CONTACT BRKT.
13	373-2510-D	CONTACT PLATE ASS'Y	35	#5428	LOCKWASHER
14	431-2501	WIPER FINGER ASS'Y	36		#10-32 x 3/4 LG. BRASS R.H.M.S
15		#6-32 x 3/8 LG. SEMS UNIT	37		#10-32 HEX NUT
16	#5305	FLAT WASHER	38	#6770	TINNERMAN NUT
17		1/4-28 HEX NUT	39	#128 & #80	CONTACT SWITCH ASS'Y
18	#5429	LOCKWASHER	40		#4 S.M.S. LENGTH AS REQUIRED
19	#5331	PLAIN WASHER	41	#6771	TINNERMAN SPACER
20	130-518	FINGER BACK-UP WASHER	42	130-1508	OPERATING ARM POST
21	#5301	WASHER	43	#108	SWITCH ASS'Y

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

00-90 UNIT

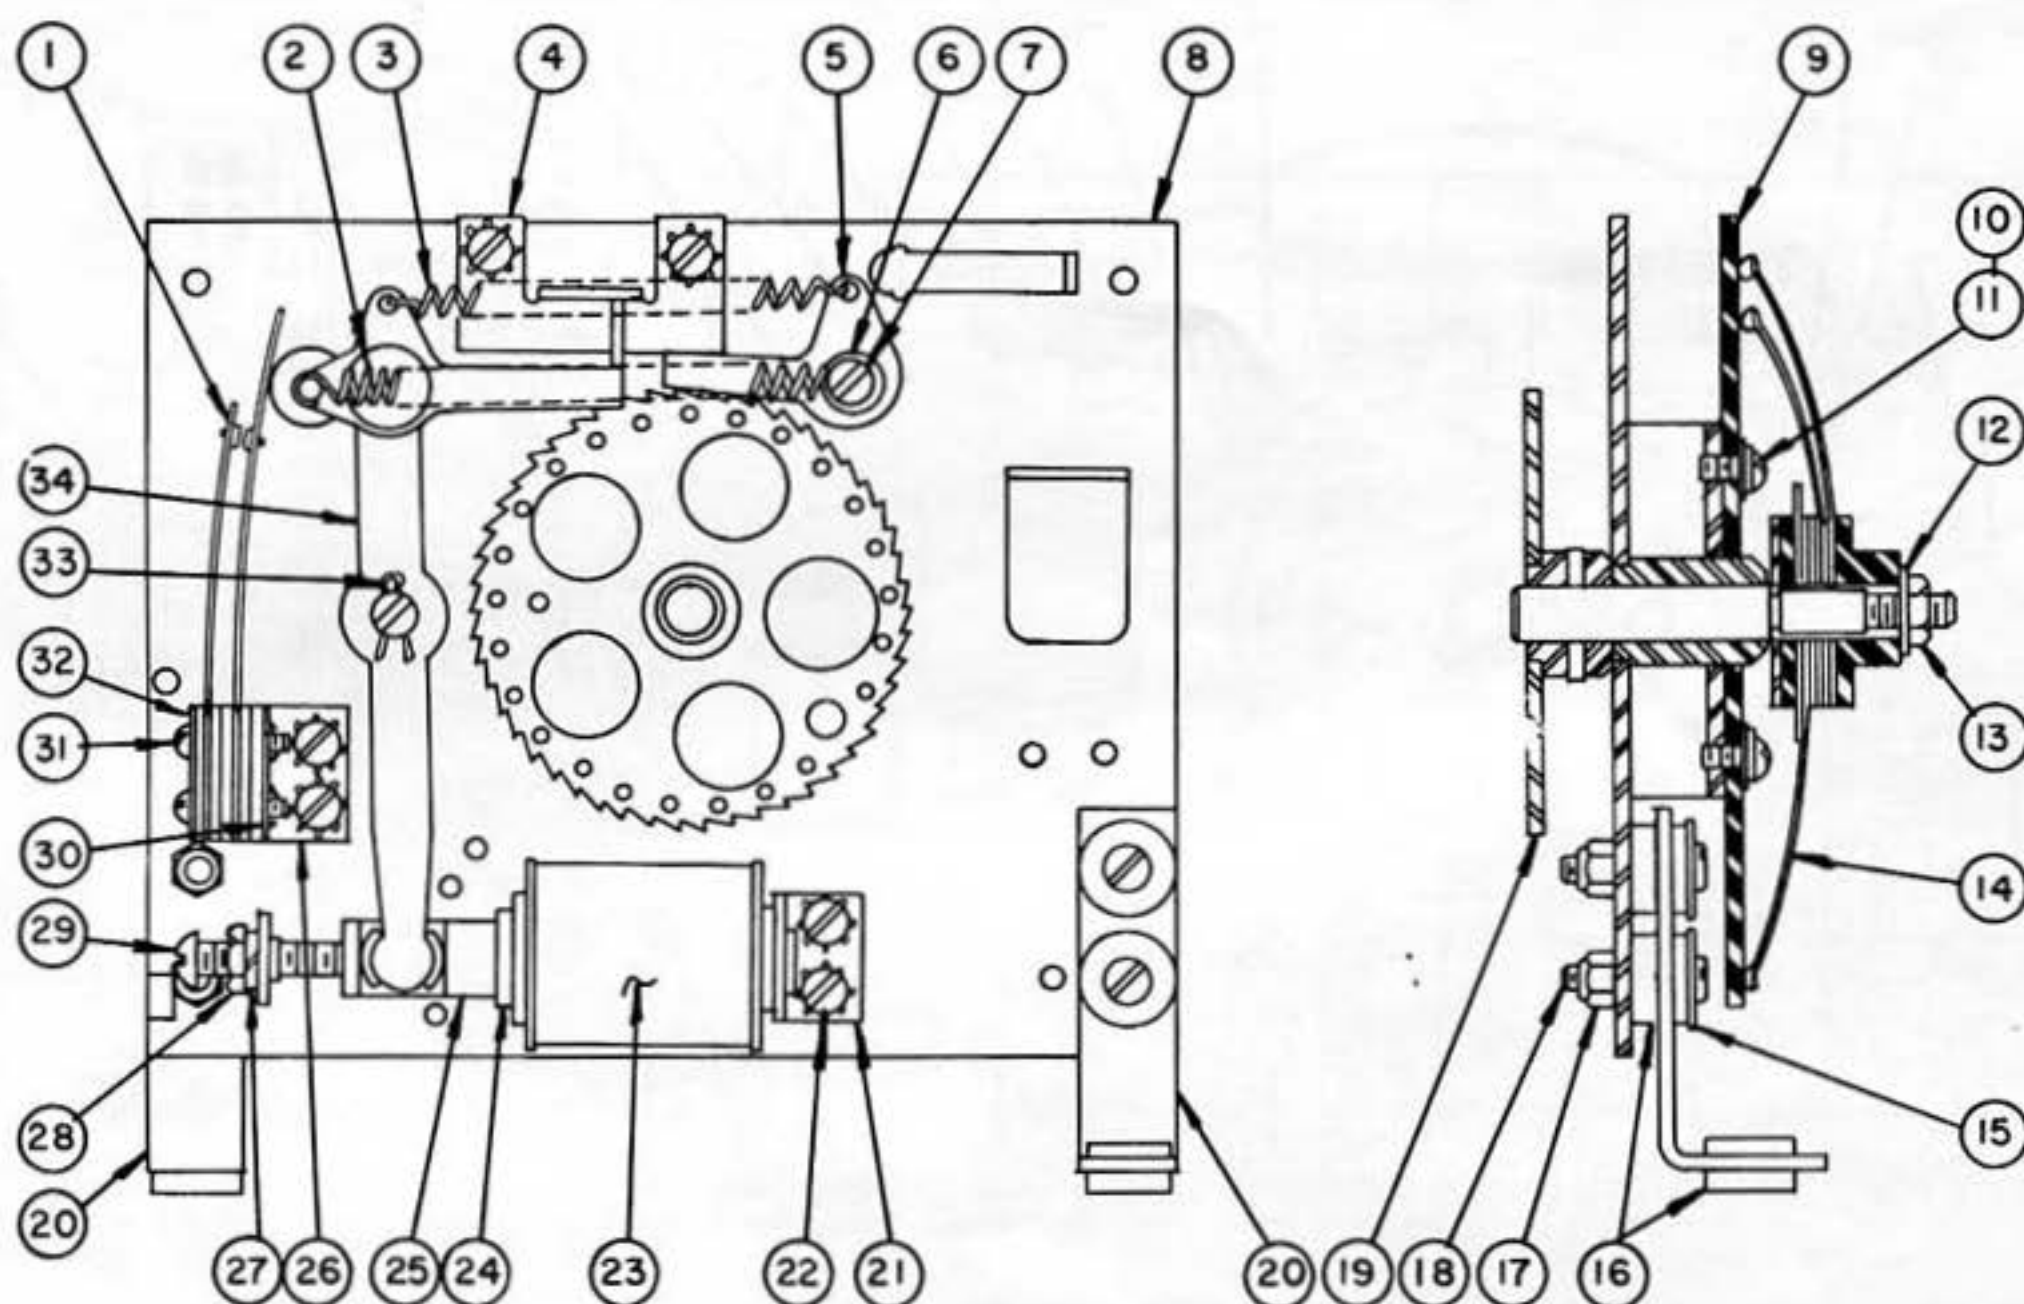

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2571-BG	COMPLETE 00-90 UNIT	17		#8-32 ELASTIC STOP NUT
1	#108	CONTACT SWITCH ASS'Y	18		#8-32 x 3/4" LG. PAN HD. M.S.
2	130-910-21	SPRING	19	130-2546	SHAFT; BUSHING & RATCHET ASS'Y
3	130-901	SPRING	20	130-599	MOUNTING LEG
4	130-531	OVER RIDE RESTRAINER	21	130-2516	PLUNGER STOP ASS'Y
5	130-2517	HOLDING PAWL & BUSHING ASS'Y	22		#6-32 x 1/4 LG. SEMS UNIT
6	130-1517	RESET POST BUSHING	23	J-23-700	COIL COMPLETE
7	130-1510	RESET PAWL POST	24	130-1535	SOLENOID TUBING
8	130-2505	MOUNTING PLATE, BRKT. & BUSHING ASS'Y	25	91-1538	OPERATING PLUNGER
9	344-2515-K	CONTACT PLATE ASS'Y (00-90 UNIT)	26	91-524	CONTACT BRACKET
10	#5305	FLAT WASHER	27	#5428	SPLIT TYPE LOCKWASHER
11		#6-32 x 3/8 LG. SEMS UNIT	28		#10-32 HEX NUT
12	#5429	SPLIT TYPE LOCKWASHER	29		#10-32 x 3/4 LG. BRASS R.H.M.S.
13		#1/4-28 HEX NUT	30	#6770	TINNERMAN NUT
14	344-2506	WIPER FINGER ASS'Y (00-90 UNIT)	31		#4 S.M.S. LENGTH AS REQUIRED
15	#5310	WASHER	32	#6771	TINNERMAN SPACRE
16	#6096	RUBBER GROMMET	33	143-902	SPRING CLIP
			34	130-2511	OPERATING ARM ASS'Y

CREDIT UNIT

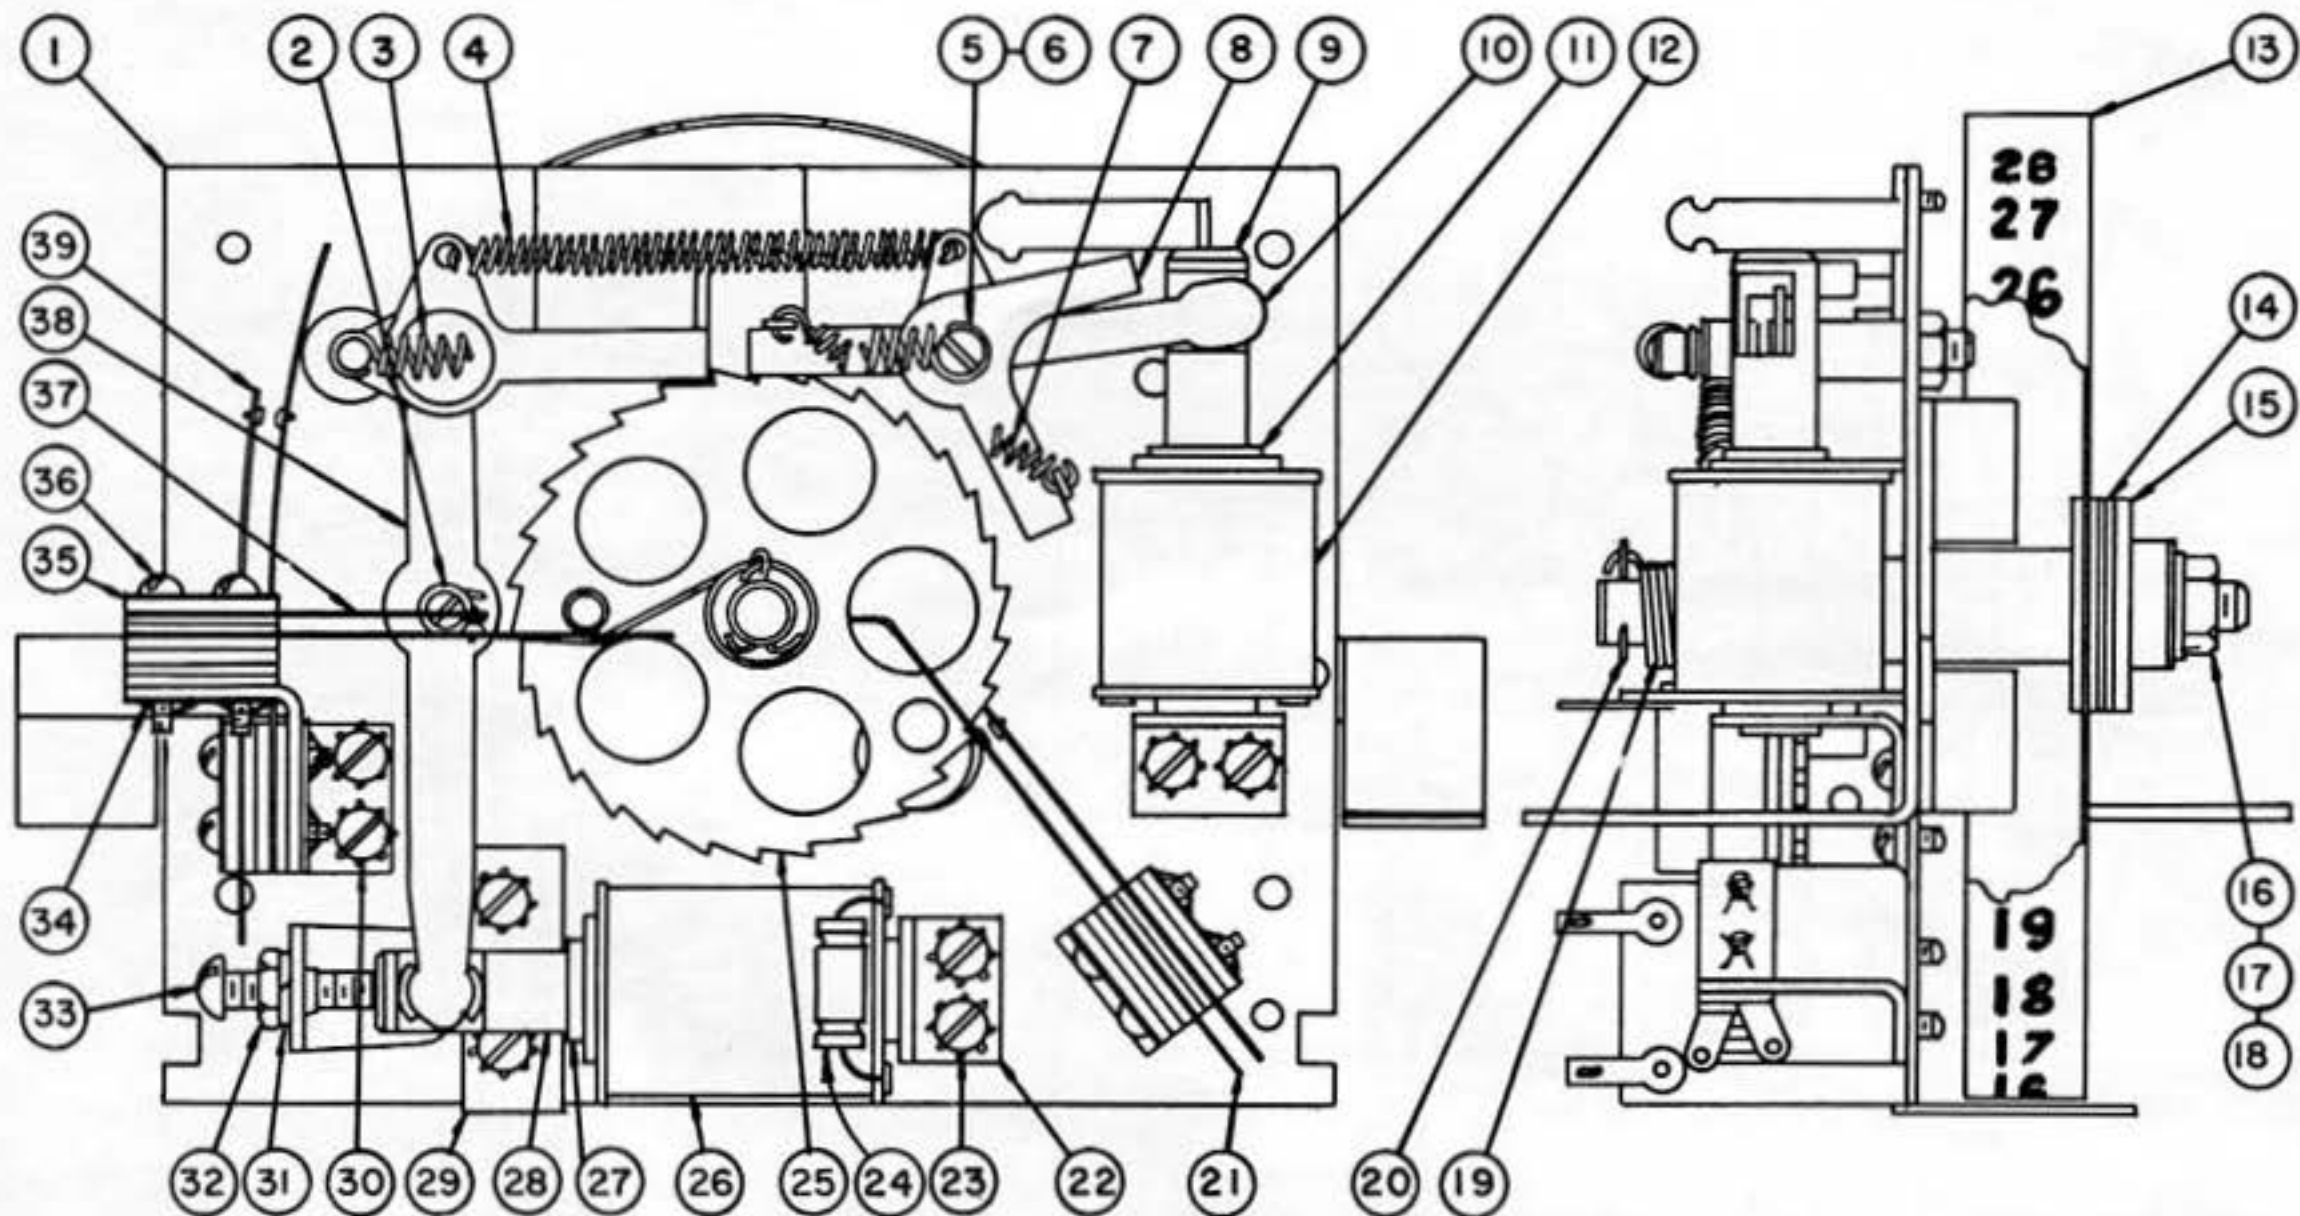


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2532-C	COMPLETE CREDIT UNIT	20	#6752-10	COTTER PIN
1	130-2583	MOUNTING PLATE ASS'Y	21	#46	SWITCH ASS'Y
2	130-1508	OPERATING ARM POST	22	130-2516	PLUNGER STOP ASS'Y
3	130-910-18	SPRING	23		#6-32 x 1/4 LG. SEMS UNIT
4	130-901	SPRING	24	#5607-A-4.7/50	NON POLARIZED CAPACITOR
5	130-1510	RESET ARM POST	25	130-2579	SHAFT, BUSHING, RATCHET & STUD ASS'Y
6	130-1517	RESET POST BUSHING	26	J-22-550	COIL (STEP-UP)
7	129-900	SPRING	27	130-1535	STEP-UP SOLENOID TUBING
8	130-2514	ESCAPEMENT PAWL & BUSHING	28	130-1513	STEP-UP PLUNGER
9	130-1539	RESET PLUNGER	29	130-532	WINDOW BRACKET
10	130-2513	RESET ARM ASS'Y	30	130-511	DOUBLE CONTACT BRACKET
11	130-1536	RESET SOLENOID TUBING	31	#5428	LOCKWASHER
12	H-26-650	COIL RESET	32		#10-32 HEX NUT
13	130-2552	DRUM ASS'Y	33		#10-32 x 3/4 LG. BRASS R.H.M.S.
14	130-518	WASHER	34	#6770	TINNERMAN NUT
15	130-806	FINGER HUB	35	#6771	TINNERMAN SPACER
16		1/4-28 HEX NUT	36		#4 S.M.S. LENGTH AS REQUIRED
17	#5429	LOCKWASHER	37	#108	SWITCH ASS'Y
18	#5331	PLAIN WASHER	38	130-2533	OPERATING ARM & POST ASS'Y
19	130-907	TORSION SPRING	39	#108	SWITCH ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

BALL COUNT & HOLE UNIT

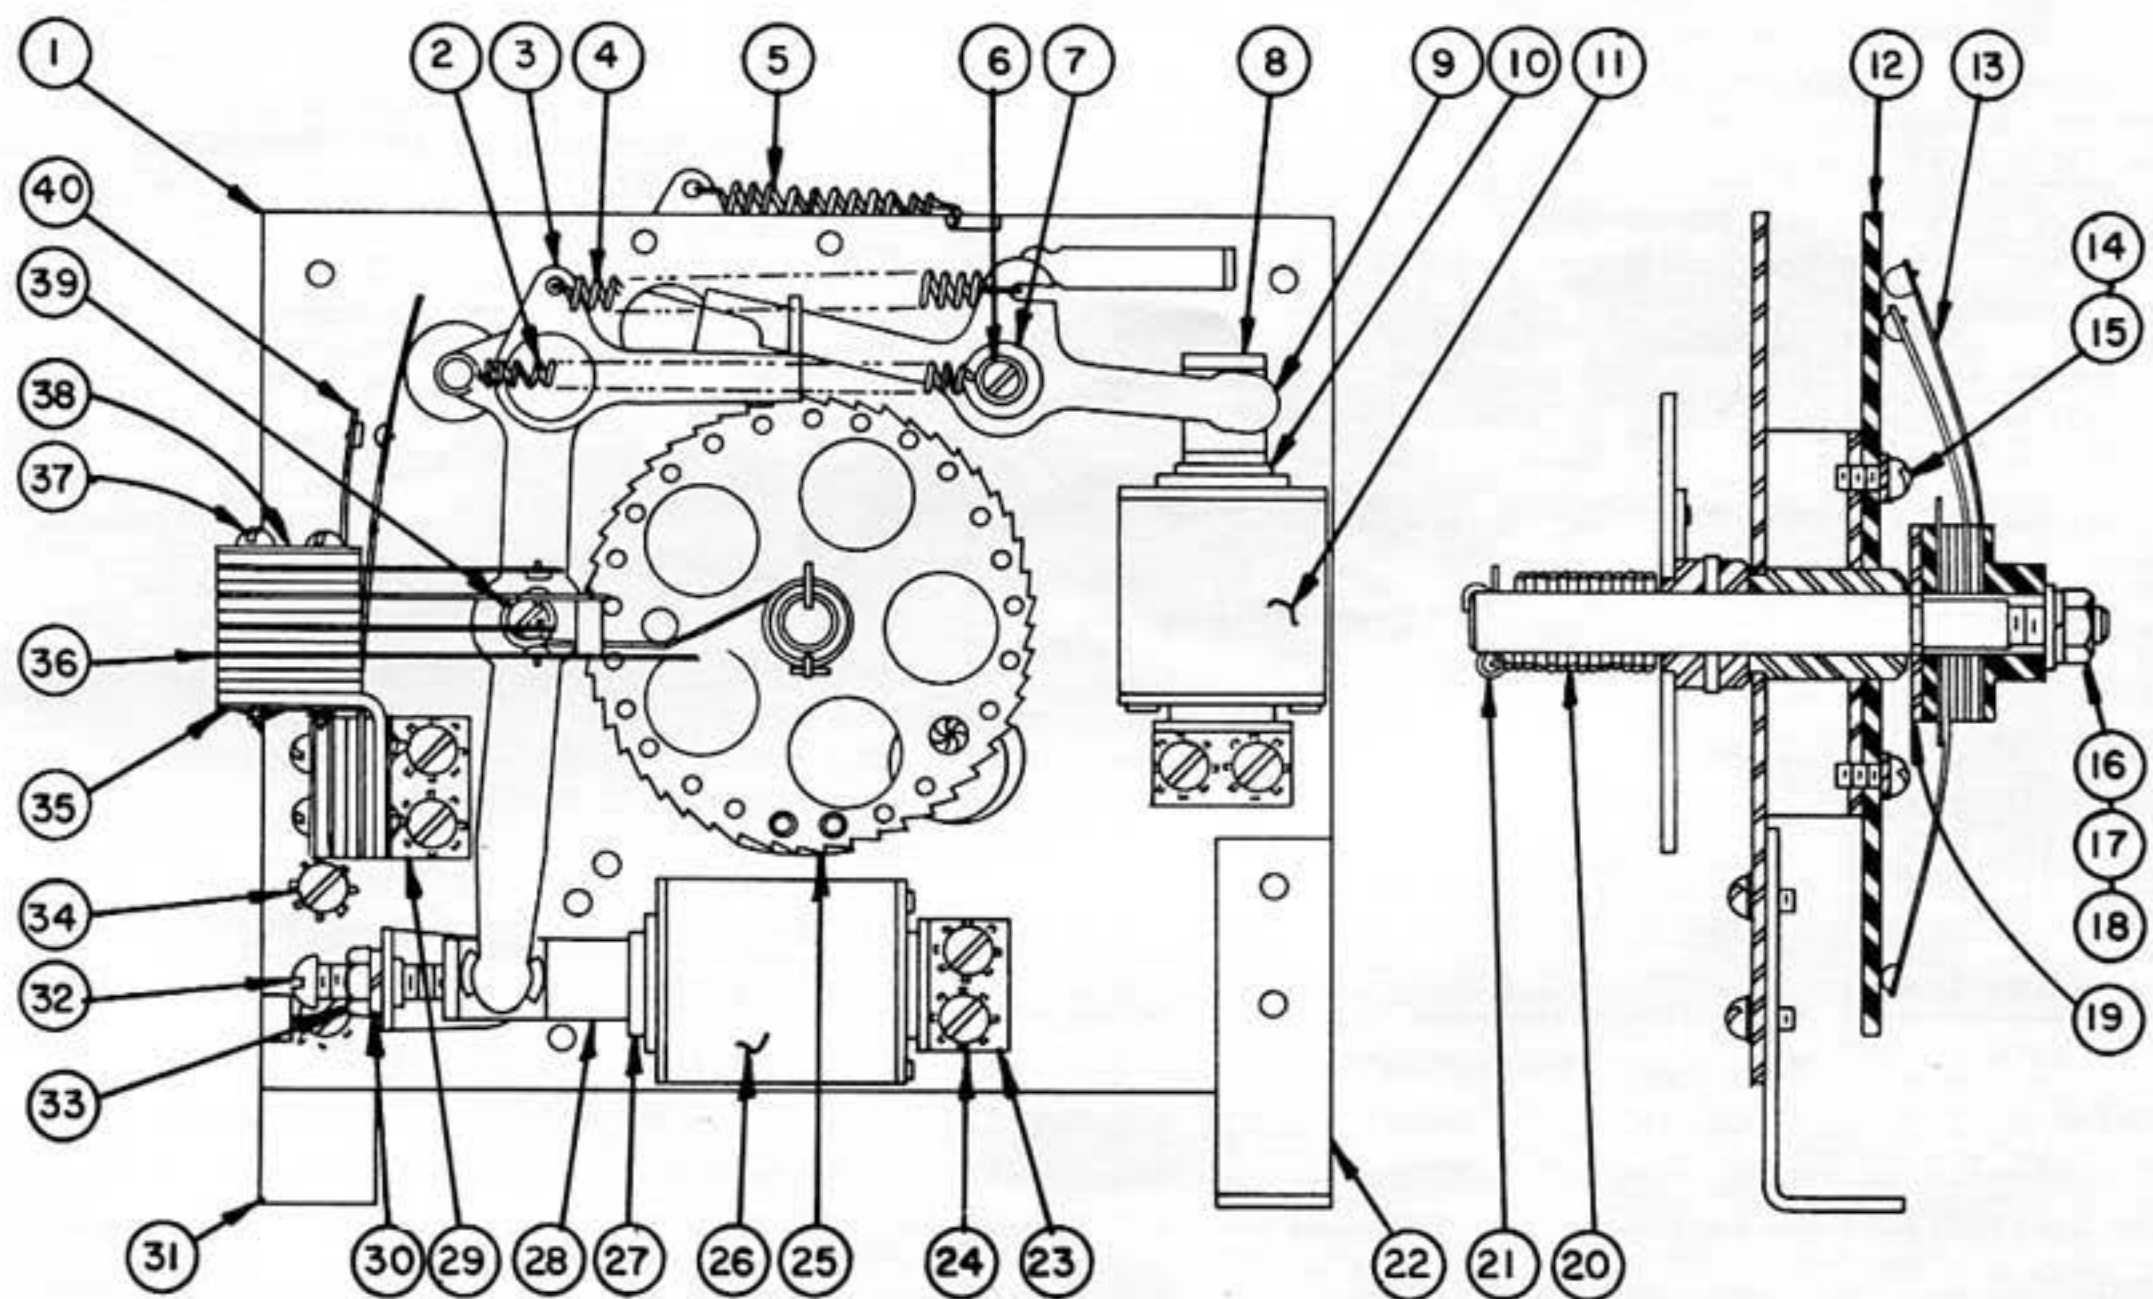

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2568-A	COMPLETE HOLE UNIT (2 STEPS)	20	130-905	TORSION SPRING
	130-2568-B	COMPLETE BALL COUNT UNIT (10 STEPS)	21	#6752-10	COTTER PIN
1	130-2502	MOUNTING PLATE ASS'Y	22	130-560-AS	MOUNTING LEG
2	130-910-18	SPRING	23	130-2516	PLUNGER STOP ASS'Y
3	130-2511	OPERATING ARM ASS'Y (BALL COUNT)	24		#6-32 x 1/4 LG. SEMS UNIT
	130-2538	OPERATING ARM ASS'Y (HOLE UNIT)	25	130-2542-10	RATCHET & POST ASS'Y (BALL COUNT)
4	130-901	SPRING		130-2542-2	RATCHET & POST ASS'Y (HOLE UNIT)
5	130-904	SPRING	26	J-22-550	STEP-UP COIL
6	130-1510	RESET ARM POST	27	130-1535	STEP-UP SOLENOID TUBING
7	130-1517	RESET ARM BUSHING	28	91-1538	STEP-UP PLUNGER
8	91-1507	RESET PLUNGER	29	130-511	DOUBLE CONTACT BRKT. (*)
9	130-2513	RESET ARM ASS'Y	30	#5428	LOCKWASHER
10	130-1536	RESET SOLENOID TUBING	31	130-560-A	MOUNTING LEG
11	H-26-500	RESET COIL	32		#10-32 x 3/4 LG. BRASS R.H.M.S.
12	455-2510	CONTACT PLATE ASS'Y (BALL COUNT)	33		#10-32 HEX NUT
	460-2506	CONTACT PLATE ASS'Y (HOLE UNIT)	34		#8-32 x 1/4 LG. SEMS
13	455-2513	WIPER FINGER ASS'Y (BALL COUNT)	35	#6770	TINNERMAN NUT (*)
	460-2505	WIPER FINGER ASS'Y (HOLE UNIT)	36	#128P	CONTACT SWITCH ASS'Y (*)
14		#6-32 x 3/8 LG. SEMS UNIT	37		#4 S.M.S. LENGHT AS REQUIRED (*)
15	#5305	FLAT WASHER	38	#6771	TINNERMAN SPACER (*)
16		1/4-28 HEX NUT	39	130-1508	OPERATING ARM POST
17	#5429	LOCKWASHER	40	#108	SWITCH ASS'Y (*)
18	#5331	PLAIN WASHER			
19	130-518	FINGER BACK-UP WASHER			


*THESE ITEMS ARE NOT USED ON 130-2568-A HOLE UNIT

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

PAGE 21

OPERATING RELAYS

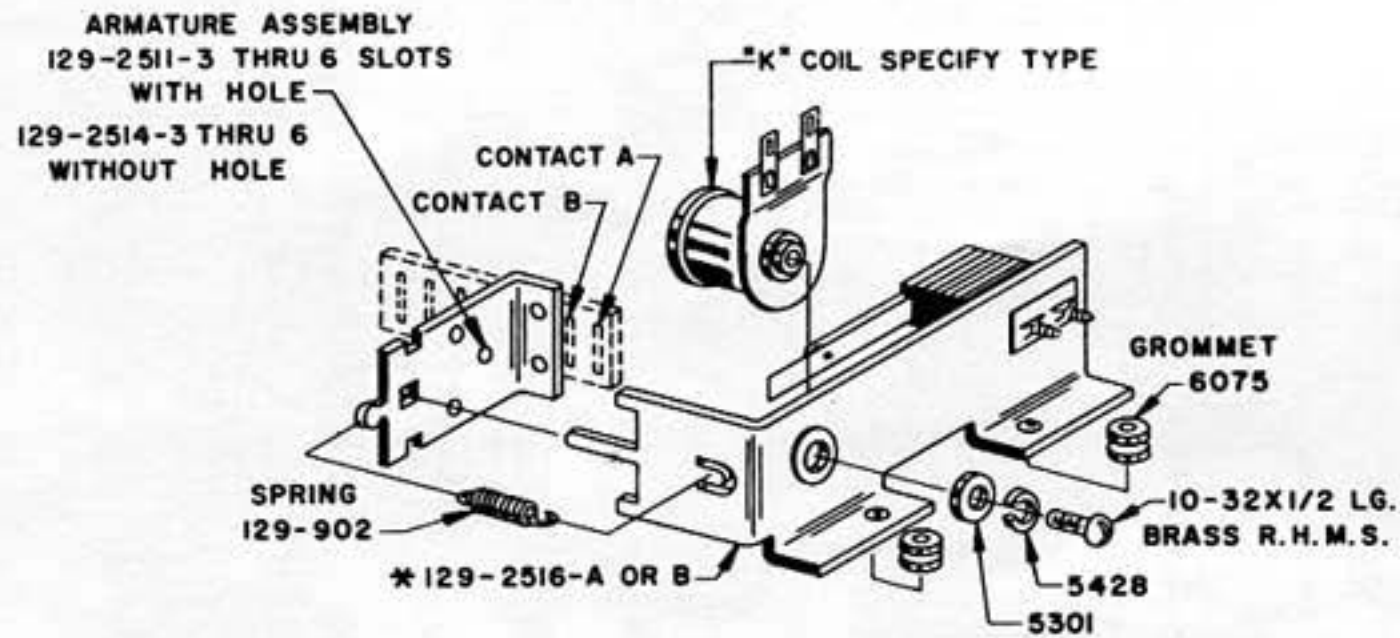

CONTACT SWITCH CODE
M-CONTACT OPEN WHEN COIL IS NOT ENERGIZED
B-CONTACT CLOSED WHEN COIL IS NOT ENERGIZED
T-TRIPLE CONTACT


* 129-2516-A FRAME ASSEMBLY WITH HOLES FOR GROMMETS
129-2516-B FRAME ASSEMBLY WITH HOLES FOR SCREWS

RELAY NAME	COIL NO.	129-2511-3 THRU 6 SLOTS		CONTACT SWITCHES					
		ARMATURE		A	B	C	D	E	F
"A" RELAY	K-28-1200	3 SLOTS		M-27	M-26	M-26			
ANTI-CHEAT RE.	K-28-1100	5 SLOTS		M-27	M-26	B-32	B-26	B-26	
BALL INDEX RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26			
BONUS COLLECT RE.-----	K-28-1200-----	5 SLOTS-----		M-27	M-26	M-34	M-26	M-48	
CHANGE RE.	K-28-1200	4 SLOTS		M-27	T-31	B-32	M-26	M-48	
COIN CONTROL RE.	K-29-1400	3 SLOTS		M-27	T-31				
COIN RE.	K-28-1200	5 SLOTS		M-27	M-26	M-34	M-26	M-26	
CREDIT RESET RE.-----	K-28-1200-----	4 SLOTS-----		M-27	M-26	M-26	T-31		
DOUBLE BONUS RE.	K-29-1400	3 SLOTS		M-27	B-26				
EXTRA BALL RE.	K-28-1200	3 SLOTS		M-27	M-26	B-26			
HOLE RE.	K-28-1100	4 SLOTS		M-27	M-26	M-26	M-26		
LOCK RE.-----	K-29-1600-----	4 SLOTS-----		M-27	B-26	M-48	M-48		
OUT HOLE RE.	K-28-1100	5 SLOTS		M-27	T-31	B-32	M-26	T-31	
PLAYER CONTROL RE.	K-28-1200	5 SLOTS		T-31	T-31	T-31	T-31	T-31	
RESET RE.	K-29-1400	3 SLOTS		M-27	B-26				
RIGHT CHUTE RE.-----	K-28-1200-----	4 SLOTS-----		M-27	M-26	B-26	T-31		
START RE.	K-28-1100	6 SLOTS		M-27	T-31	M-34	M-24	T-31	B-48
TARGET RE.	K-28-1200	5 SLOTS		M-26	T-31				
TARGET RESET RE.	K-28-1100	5 SLOTS		M-27	M-26	T-31			
TILT RE.-----	K-28-1200-----	4 SLOTS-----		M-27	M-26	M-26	B-48		
1st. PLAYER 100,000 RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	M-26		
2nd. PLAYER 100,000 RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	M-26		


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

OPERATING RELAYS

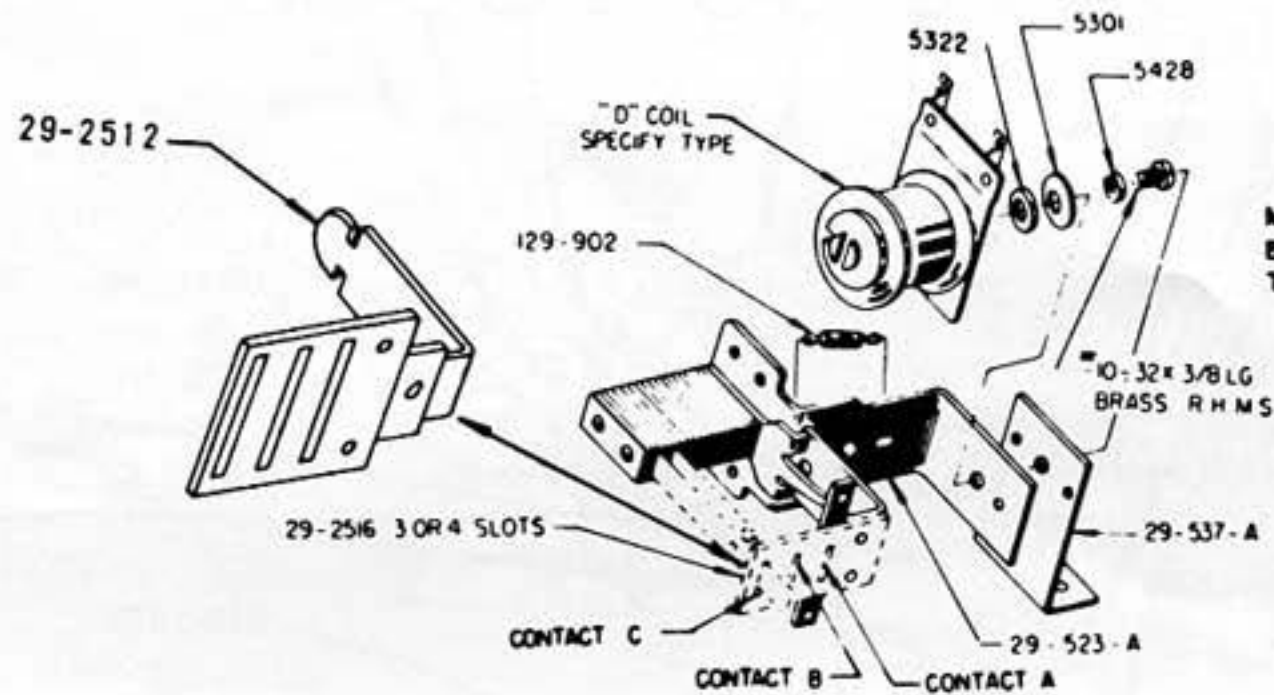


RELAY NAME	COIL NO.	ARMATURE	
10-90 RE.	D-27-1000	29-2516-5	ALL CONTACT SWITCHES M-28
100-900 RE.	D-27-1000	29-2516-4	ALL CONTACT SWITCHES M-28
1000-9000 RE.	D-27-1000	29-2516-5	ALL CONTACT SWITCHES M-28
SCORE RESET RE.	D-27-1000	29-2512-3	ALL CONTACT SWITCHES M-27

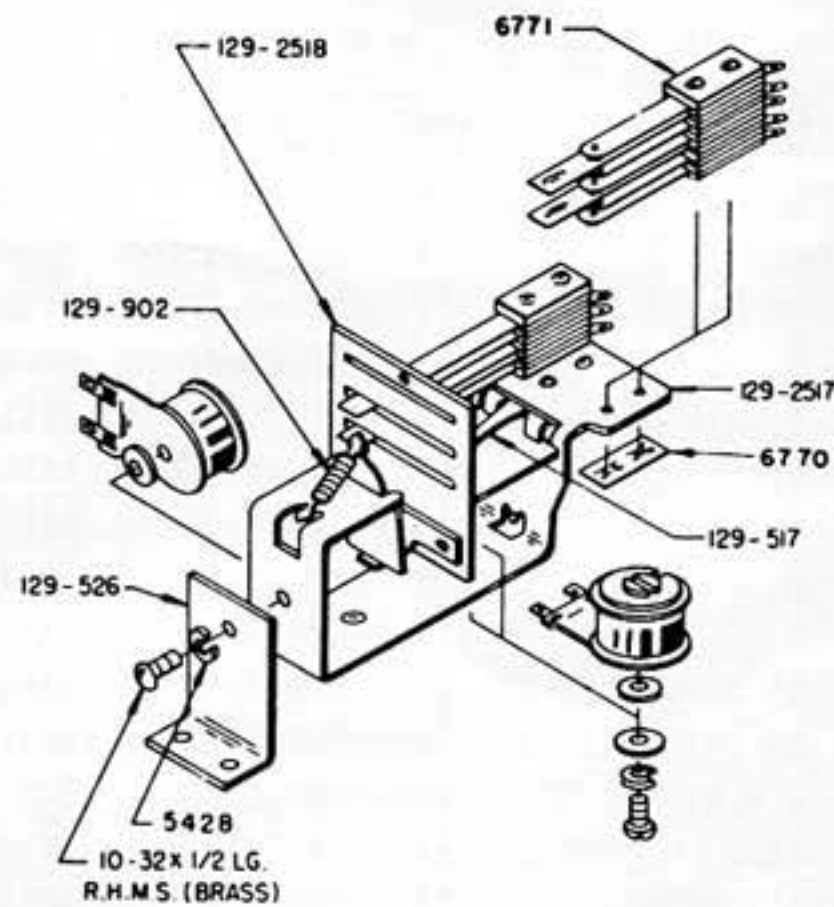

RELAY NAME	COIL NO.	ARMATURE	CONTACT SWITCHES					
			A	A-1	B	B-1	C	C-1
GAME OVER RE.	L-29-700	129-2518-3	M-357-A	M-357-A	B-357	B-357	T-356	B-357
2nd. COIN RE.	L-29-700	129-2518-2	M-357	M-357-A	T-356	T-356		

SCORING DRUM UNIT

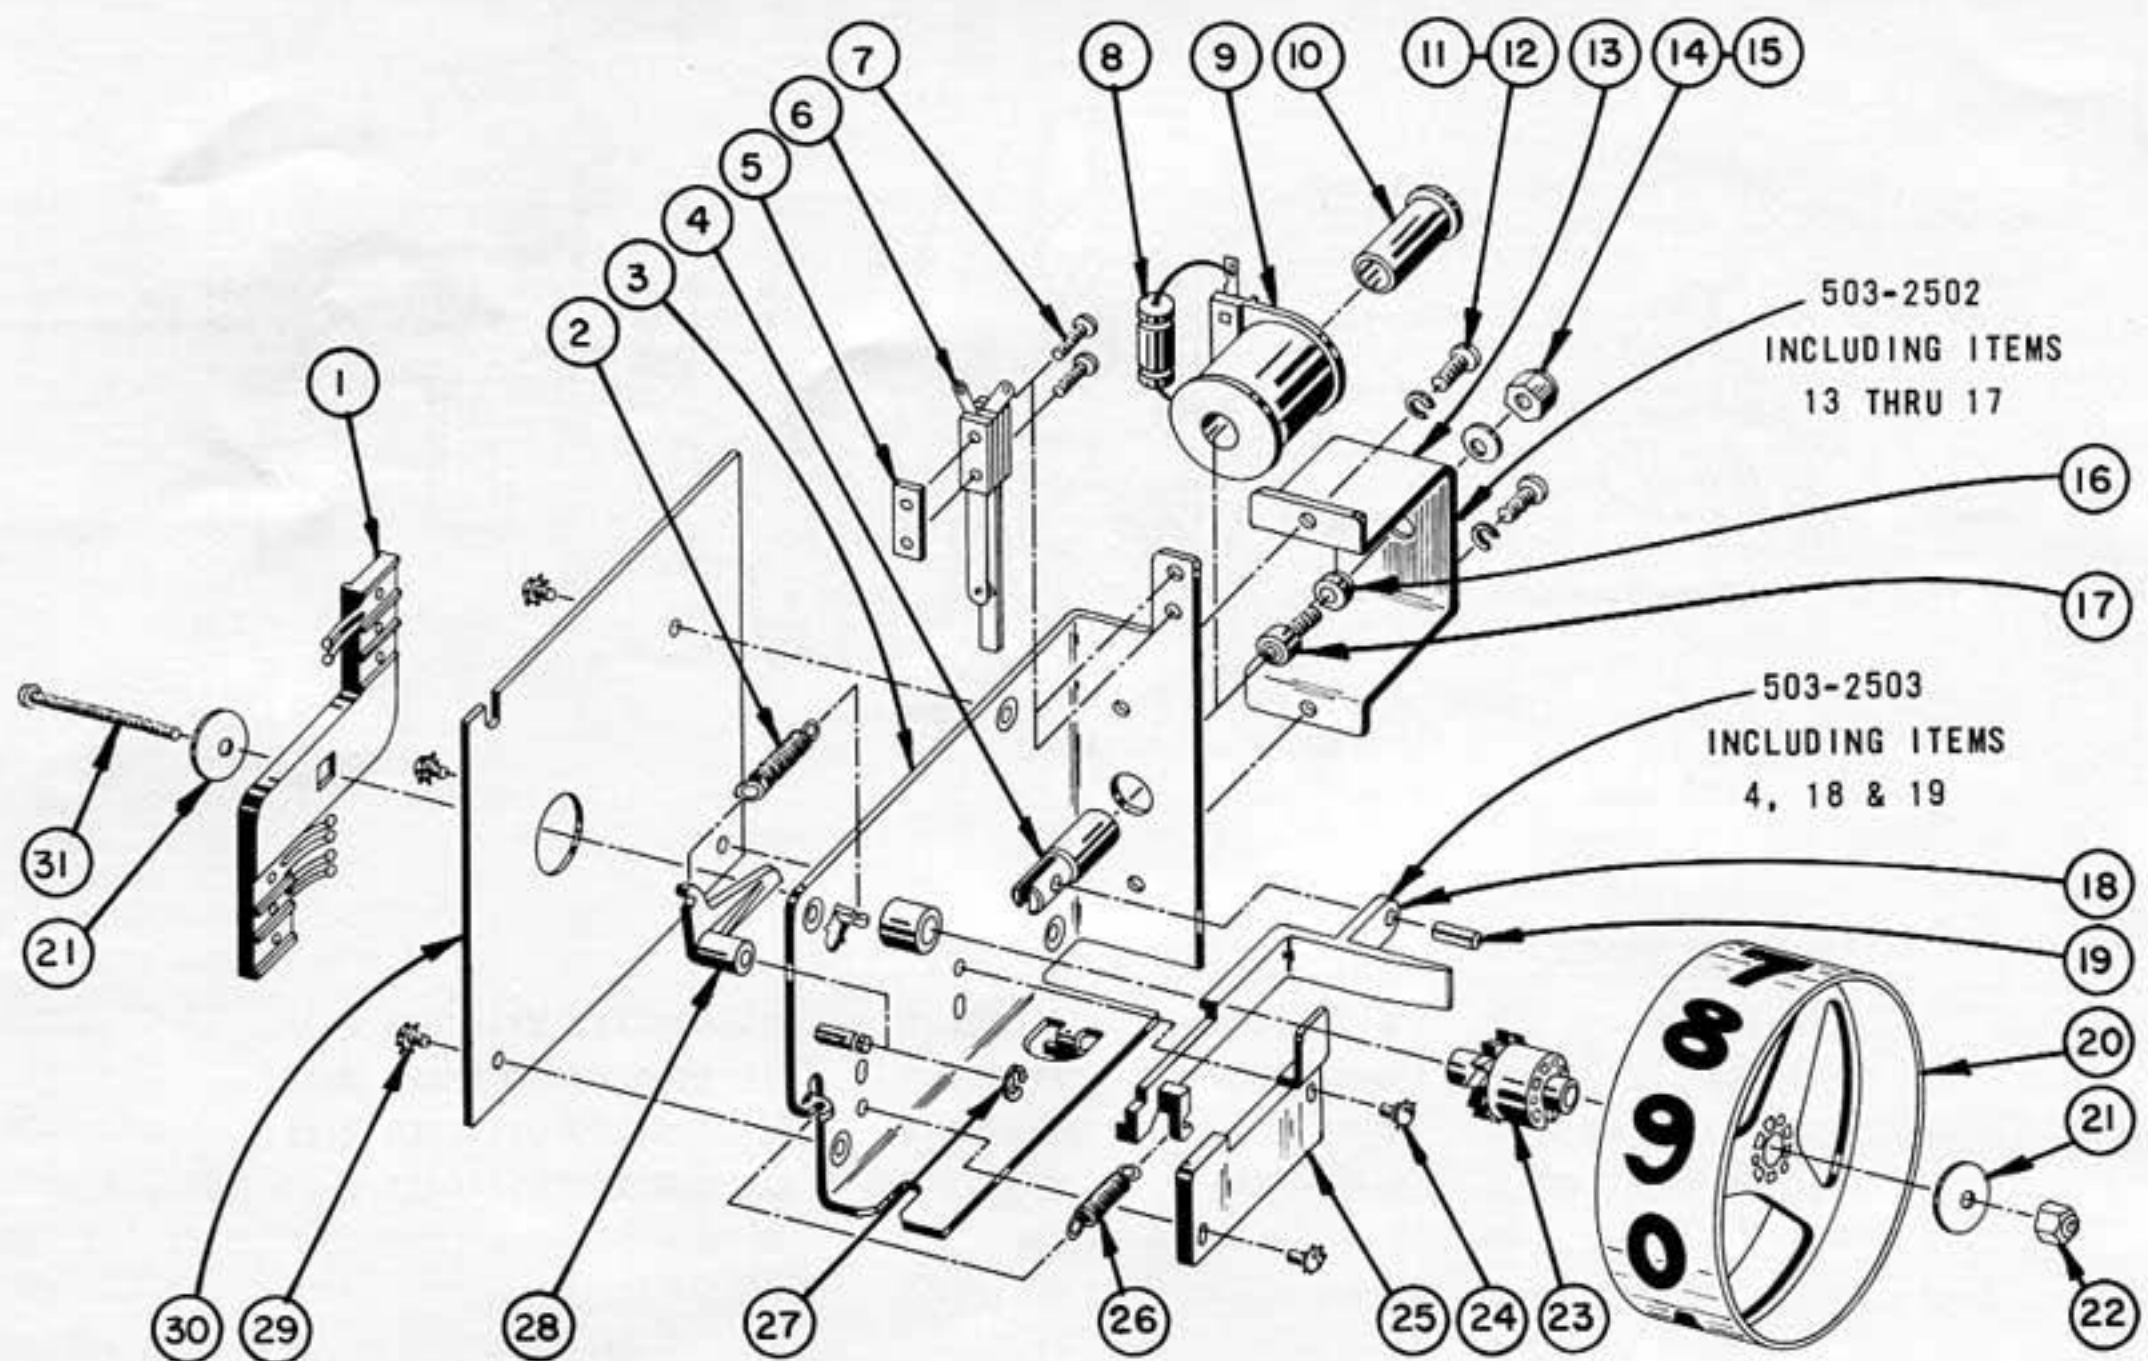


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	503E-2530-A	10-90, 100-900, 1000-9000 SCORING DRUM UNITS (6-REQ'D.)	15	#5322	BRASS WASHER
	503E-2530-B	10,000's SCORING DRUM UNITS (2-REQ'D.)	16	500-1501	PLUNGER STOP BUSHING
1	503-2505	WIPER FINGER ASS'Y	17	500-2507	PLUNGER STOP & SLUG ASS'Y
2	503-901	SPRING (HOLDING PAWL)	18	503-802	OPERATING ARM
3	503-2501	MOUNTING PLATE ASS'Y	19	6703-6	ROLL PIN
4	503-1502	OPERATING PLUNGER	20	503-800-WB	DRUM
5	503-510	NUT PLATE	21	#5366	WASHER
6	#431-A	SWITCH ASS'Y (USED ON 503E-2530-A)	22		#4-40 ELASTIC STOP NUT
	#431-B	SWITCH ASS'Y (USED ON 503E-2530-B)	23	503-801	RATCHET
7		#2-56 x 1/2" LG. R.H.M.S.	24		#4-40 x 3/16 LG. SEMS UNIT
8	#5607-A-4.7/50	NON POLARIZED CAPACITOR (USED ONLY ON 10,000's DRUMS)	25	503-803	ADJUSTABLE STOP
9	NA-26-900-X	COIL COMPLETE	26	300-900-B	SPRING (OPERATING ARM)
10	143-1516	SOLENOID TUBING	27	6722-14	RETAINING RING
11		#8-32 x 3/8" LG. TYPE "F" PHILLIP PAN HD. SELF TAPPING SCREW	28	503-804	HOLDING PAWL
12	#5427	SPLIT TYPE LOCKWASHER	29		#4-40 x 3/16 LG. TYPE "F" PHILLIP PAN HD. SELF TAPPING SCREW
13	503-506	COIL MTG. BRACKET	30	503E-507	COUNTER SWITCH P.C.
14		#10-32 ELASTIC STOP NUT	31		#4-40 x 1-1/4" LG. SLOTTED HD. M.S.

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG



SCORE MOTOR CAMS

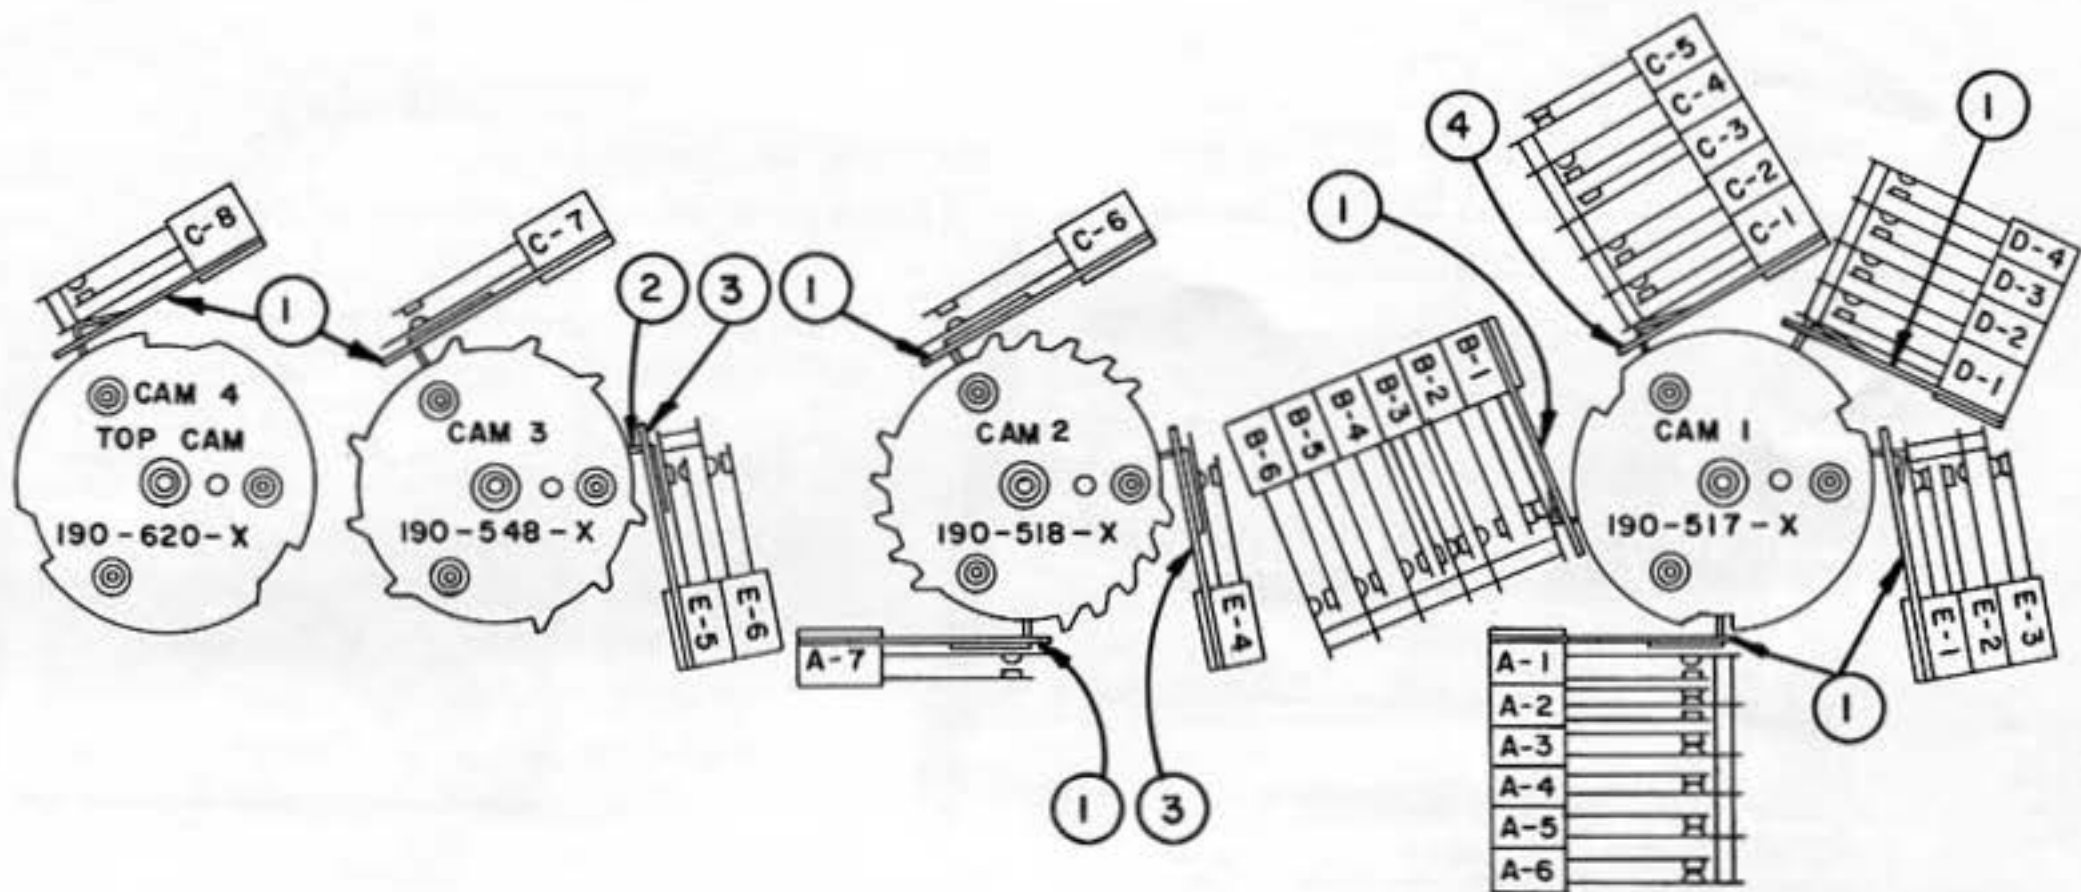

ITEM	PART NO.	DESCRIPTION
	455-2509	SCORE MOTOR CAM ASS'Y
	#5750-2333	SCORE MOTOR (60 Hz 22 R.P.M.)
	#5750-2334	SCORE MOTOR (50 Hz 22 R.P.M.)
	455-2509	SCORE MOTOR CAM ASS'Y
1	115-501-F	CAM RIDER PLATE
2	115-508	CAM RIDER ON ALL THE SWITCHES
3	115-501-P	CAM RIDER PLATE
4	115-501-A	CAM RIDER PLATE
A-1	#63	SWITCH ASSEMBLY
A-2	#234	SWITCH ASSEMBLY
A-3	#57	SWITCH ASSEMBLY
A-4	#57	SWITCH ASSEMBLY
A-5	#57	SWITCH ASSEMBLY
A-6	#57	SWITCH ASSEMBLY
A-7	#63	SWITCH ASSEMBLY
B-1	#17	SWITCH ASSEMBLY
B-2	#325	SWITCH ASSEMBLY
B-3	#234	SWITCH ASSEMBLY
B-4	#325	SWITCH ASSEMBLY
B-5	#325	SWITCH ASSEMBLY

ITEM	PART NO.	DESCRIPTION
B-6	#57	SWITCH ASSEMBLY
C-1	#60	SWITCH ASSEMBLY
C-2	#57	SWITCH ASSEMBLY
C-3	#9-B	SWITCH ASSEMBLY
C-4	#325	SWITCH ASSEMBLY
C-5	#9-B	SWITCH ASSEMBLY
C-6	#63	SWITCH ASSEMBLY
C-7	#63	SWITCH ASSEMBLY
C-8	#60	SWITCH ASSEMBLY
D-1	#62	SWITCH ASSEMBLY
D-2	#325	SWITCH ASSEMBLY
D-3	#325	SWITCH ASSEMBLY
D-4	#57	SWITCH ASSEMBLY
E-1	#63	SWITCH ASSEMBLY
E-2	#325	SWITCH ASSEMBLY
E-3	#430-A	SWITCH ASSEMBLY
E-4	#63	SWITCH ASSEMBLY
E-5	#63	SWITCH ASSEMBLY
E-6	#326	SWITCH ASSEMBLY

COIN DENOMINATION WINDOWS

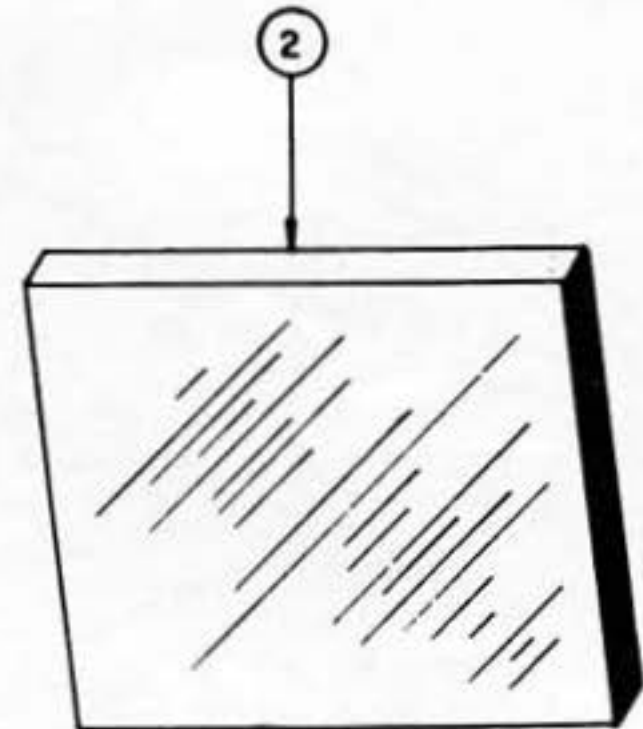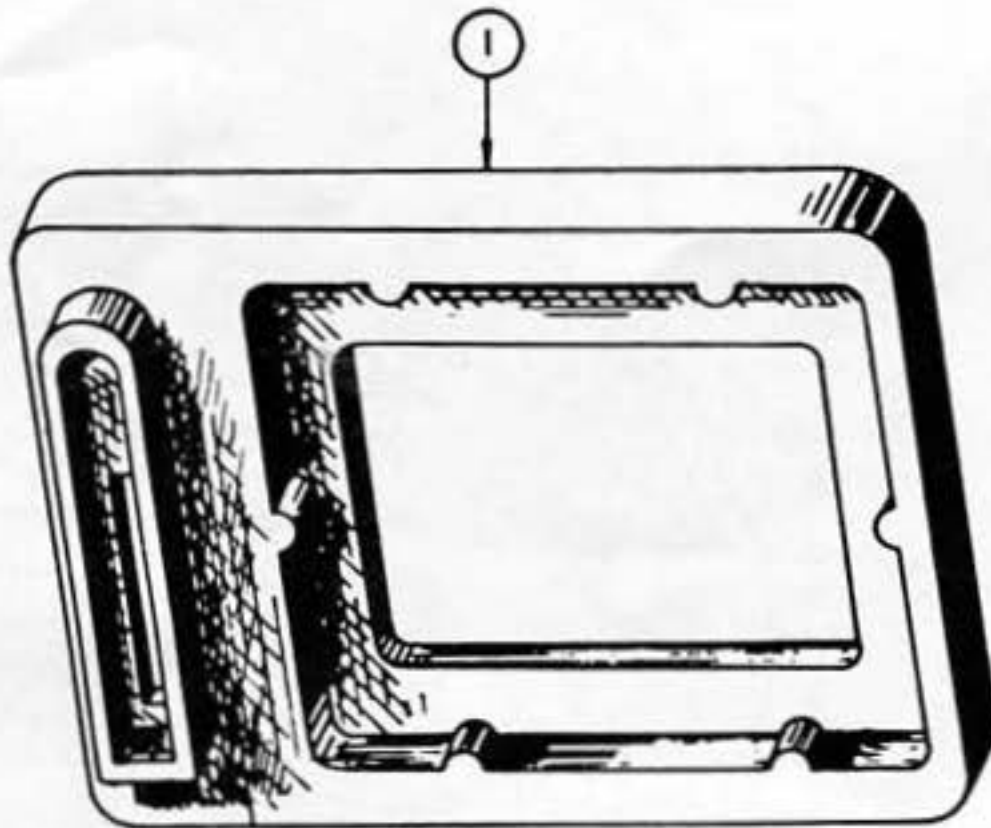

ITEM	PART NO.	DESCRIPTION
1	382-800-A	5¢ COIN ENTRY MOLDING
	382-800-B	10¢ COIN ENTRY MOLDING
	382-800-C	25¢ COIN ENTRY MOLDING
	382-800-F	FOREIGN COIN ENTRY MOLDING (SPECIFY COIN OPENING)
2	326-305-A	COIN DENOMINATION WINDOWS (2 NICKELS - 1 PLAY)
	326-305-B	(10¢ - 1 PLAY)
	326-305-C	(25¢ - 3 PLAYS)
	326-305-D	(5¢ - 1 PLAY)
	326-305-E	(25¢ - 5 PLAYS)
	326-305-F	(25¢ - 6 PLAYS)
	326-305-G	(10¢ - 2 PLAYS)
	326-305-H	(3 NICKELS - 1 PLAY)
	326-305-J	(1 DIME & 1 NICKEL - 1 PLAY)
	326-305-K	(1 QUARTER - 2 PLAYS)
	326-305-L	(25¢ - 2 PLAYERS)
	326-305-M	(2 DIMES - 2 PLAYERS)
	326-305-O	(10¢ - 1 PERIOD)
	326-305-P	(25¢ - 3 PERIODS)
	326-305-Q	(25¢ - 1 PLAY)
	326-305-R	(25¢)
	326-305-S	(25¢ - 4 PLAYS)
	326-305-T	(1 QUARTER - 1 PLAY)
	326-305-U	(A GAME OF SKILL)
	326-305-V	(1 QUARTER EACH PLAYER)

ITEM	PART NO.	DESCRIPTION
2	326-305-W	(1 DIME EACH PLAYER)
	326-305-X	(QUARTER)
	326-306-A	(2 x 10 PFENNING - 1 PLAY) (GERMAN)
	326-306-B	(50 PFENNING - 3 PLAYS) (GERMAN)
	326-306-C	(1 D.M. - 6 PLAYS) (GERMAN)
	326-306-D	(50 PFENNING - 1 PLAY) (GERMAN)
	326-306-E	(50 PFENNING - 2 PLAYS) (GERMAN)
	326-306-F	(1 D.M. - 4 PLAYS) (GERMAN)
	326-306-G	(1 D.M. - 5 PLAYS) (GERMAN)
	326-306-H	(2 D.M. - 10 PLAYS) (GERMAN)
	326-306-I	(2 D.M. - 11 PLAYS) (GERMAN)
	326-306-J	(2 D.M. - 12 PLAYS) (GERMAN)
	326-306-K	(1 D.M. - 2 PLAYS) (GERMAN)
	326-306-L	(1 D.M. - 1 PLAY) (GERMAN)
	326-306-M	(2 D.M. - 5 PLAYS) (GERMAN)
	326-306-N	(1 D.M. - 2 PLAYER) (GERMAN)
	326-306-O	(2 D.M. - 4 PLAYER) (GERMAN)
	326-306-P	(50 PFENNING) (GERMAN)
	326-306-Q	(1 D.M.) (GERMAN)
	326-306-R	(2 D.M.) (GERMAN)
	326-307-A	(50 LIRE - 1 PLAY) (ITALY)
	326-307-B	(100 LIRE - 2 PLAYS) (ITALY)
	326-307-C	(100 LIRE - 1 PLAY) (ITALY)
	326-307-D	(100 LIRE - 3 PLAYS) (ITALY)
	326-307-E	(100 LIRE - 2 PLAYS) (ITALY)
	326-308-A	(2 x 25 ORE - 1 PLAY) (SWEDISH OR DENMARK)

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

COIN DENOMINATION WINDOWS

<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
326-308-B	(1 KRONE - 3 PLAYS) (SWEDISH OR DENMARK)	326-311-G	(20 CENTS - 1 PLAY) (BRITISH)
326-308-C	(50 ORE - 1 PLAY) (SWEDISH OR DENMARK)	326-311-H	(5d - 1 PLAY) (BRITISH)
326-308-D	(1 KRONE - 2 PLAYERS) (DENMARK)	326-311-I	(5d - 2 PLAYERS) (BRITISH)
326-309-A	(2 X 10 YEN - 1 PLAY) (JAPANESE)	326-311-J	(10 PENCE - 4 PLAYERS) (BRITISH)
326-309-B	(50 YEN - 3 PLAYS) (JAPANESE)	326-311-K	(TWO SHILLINGS - 5 PLAYS) (BRITISH)
326-309-C	(50 YEN - 1 PLAY) (JAPANESE)	326-312-A	(1 DINAR - 2 PLAYS) (YUGOSLAVIA)
326-309-D	(100 YEN - 3 PLAYS) (JAPANESE)	326-312-B	(50 PARA - 1 PLAY) (YUGOSLAVIA)
326-309-E	(3 X 10 YEN - 1 PLAY) (JAPANESE)	326-312-C	(1 DINAR - 1 PLAY) (YUGOSLAVIA)
326-309-F	(50 YEN - 2 PLAYS) (JAPANESE)	326-313-A	(1 SPEL - 25¢) (HOLLAND)
326-310-A	(1/2 FRANC - 1 PLAY) (FRENCH)	326-313-B	(1 GULDEN) (4 SPELEN) (HOLLAND)
326-310-B	(1 FRANC - 3 PLAYS) (FRENCH)	326-313-C	(1 GULDEN - 2 SPELER) (HOLLAND)
326-310-C	(1 FRANC - 4 PLAYS) (FRENCH)	326-314-A	(2 X 1 SCHILLING - 1 PLAY) (AUSTRIA)
326-310-D	(1 FRANC - 1 PLAY) (FRENCH)	326-314-B	(5 SCHILLINGS - 3 PLAYS) (AUSTRIA)
326-310-E	(2-20 CENTIMES - 1 PLAY) (FRENCH)	326-315-A	(1 KRONA - 1 PLAY) (SWEDEN)
326-310-F	(100 FRANC - 1 PLAY) (FRENCH)	326-315-B	(1 KRONA - 2 PLAYERS) (SWEDISH)
326-310-G	(50 CENTIMES - 1 PLAY) (FRENCH)	326-316-A	(1 MARKKA - 1 PLAY) (FINLAND)
326-310-H	(1 FRANC - 2 PLAYS) (FRENCH)	326-317-A	(1 ESCUDO - 1 PLAY) (PORTUGAL)
326-310-I	(5 FRANCS - 1 PLAY) (FRENCH)	326-317-B	(5 ESCUDOS - 2 PLAYERS) (PORTUGAL)
326-310-J	(50 CENTIMES - 2 PLAYS) (FRENCH)	326-318-A	(25 PIASTRES - 1 PLAY) (LEBANON)
326-310-K	(1 FRANC - 5 PLAYS) (FRENCH)	326-318-B	(50 PIASTRES - 2 PLAYS) (LEBANON)
326-310-L	(10 FRANCS - 2 PLAYS) (FRENCH)	326-319-A	(25 CENTIMES - 1 PLAY) (VENEZUELA)
326-310-M	(2 X 1 FRANC - 1 PLAY) (FRENCH)	326-320-A	(1 PESO - UN JUEGO) (MEXICO)
326-310-N	(2 X 5 FRANCS - 1 PLAY) (FRENCH)	326-320-B	(2 X 1 PESO - UN JUEGO) (MEXICO)
326-310-O	(1 FRANC - 2 PLAYERS) (FRENCH)	326-321-A	(2 X 5 PESETAS - 2 PLAYERS) (SPAIN)
326-311-A	(6d - 1 PLAY) (BRITISH)	382-301-A	(1 QUARTER - 2 PLAYS)
326-311-B	(ONE SHILLING - 1 PLAY) (BRITISH)	382-301-B	(1 QUARTER - 3 PLAYS)
326-311-C	(TWO SHILLINGS - 2 PLAYS) (BRITISH)	382-301-C	(1 DIME & 1 NICKEL - 1 PLAY)
326-311-D	(TWO SHILLINGS - 4 PLAYS) (BRITISH)	382-301-D	(3 NICKELS - 1 PLAY)
326-311-E	(ONE SHILLING - 3 PLAYS) (BRITISH)	382-301-E	(10¢ - 1 PLAY)
326-311-F	(TWO SHILLINGS - 1 PLAY) (BRITISH)	382-301-F	(2 NICKELS - 1 PLAY)


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


PRINTED CIRCUITS




BALL COUNT UNIT
PLATE ASS'Y. 455-2510
FINGER ASS'Y. 455-2513

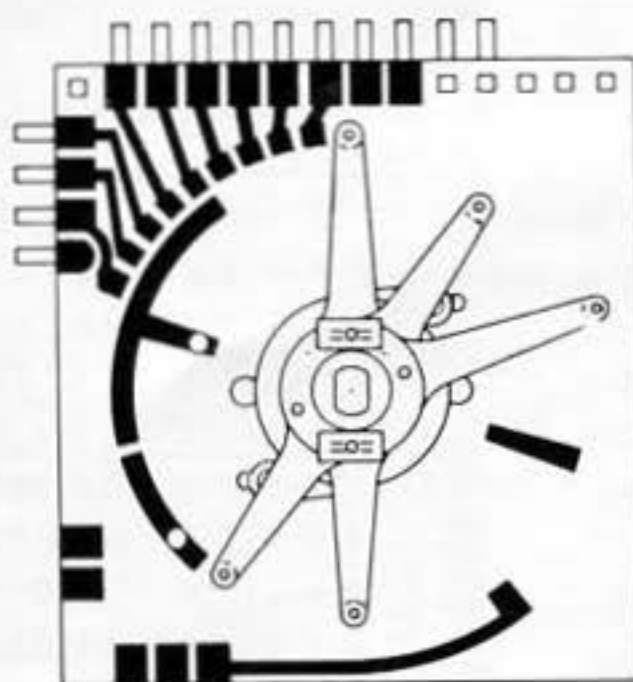


BONUS UNIT
PLATE 373-2510-D
FINGER 431-2501

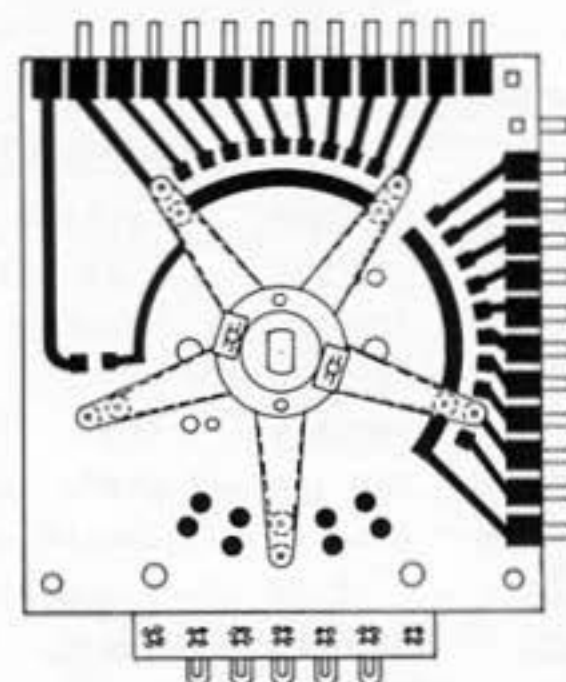

00-90 UNIT
PLATE ASS'Y. 344-2515-K
FINGER ASS'Y. 344-2506

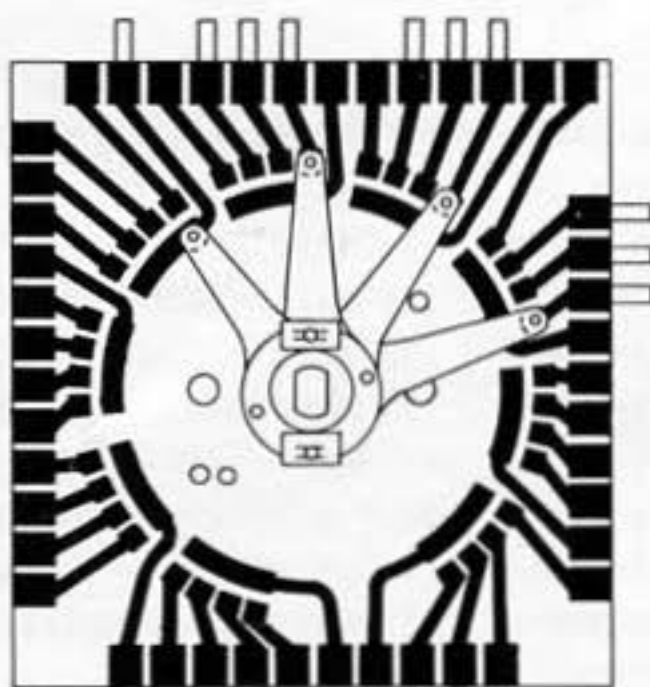


HOLE UNIT
PLATE ASS'Y. 460-2506
FINGER ASS'Y. 460-2505

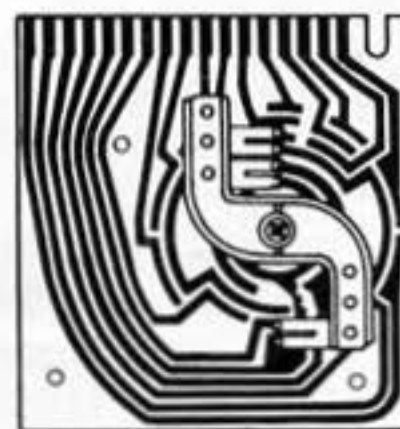

SCORING DRUM
P.C. BOARD 503E-507
WIPER FINGER ASS'Y. 503-2505

TRANSFORMER # 5666-2518


FOR 115 VOLT
50/60 HZ INPUT

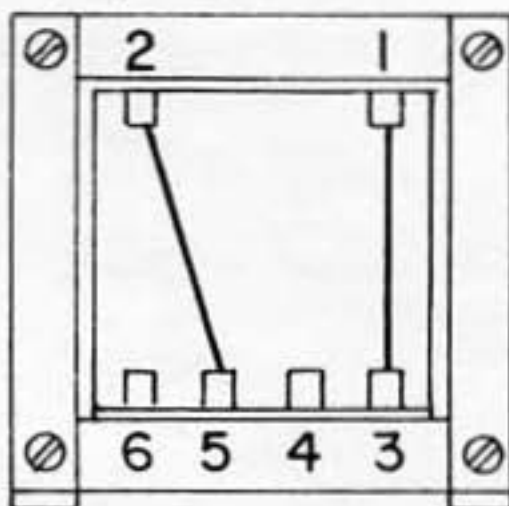

CONNECT #1 & #3 TOGETHER
CONNECT 2 & 5 TOGETHER

YELLOW = #1
BLACK = #2
DO NOT USE #4 OR #5 FOR 115 VOLT OPERATION

FOR 220-230-245 VOLT
50/60 HZ INPUT

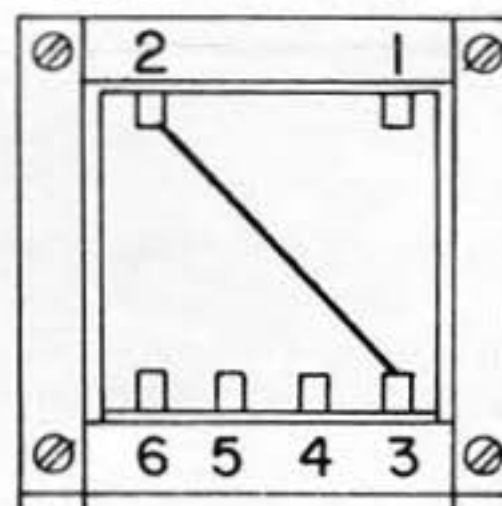


CONNECT #2 & #3 TOGETHER

YELLOW = #1
BLACK TO #4 = 220 V.
BLACK TO #5 = 230 V.
BLACK TO #6 = 245 V.


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

RIGHT FLIPPER BUTTON & CREDIT BUTTON ASSEMBLY.

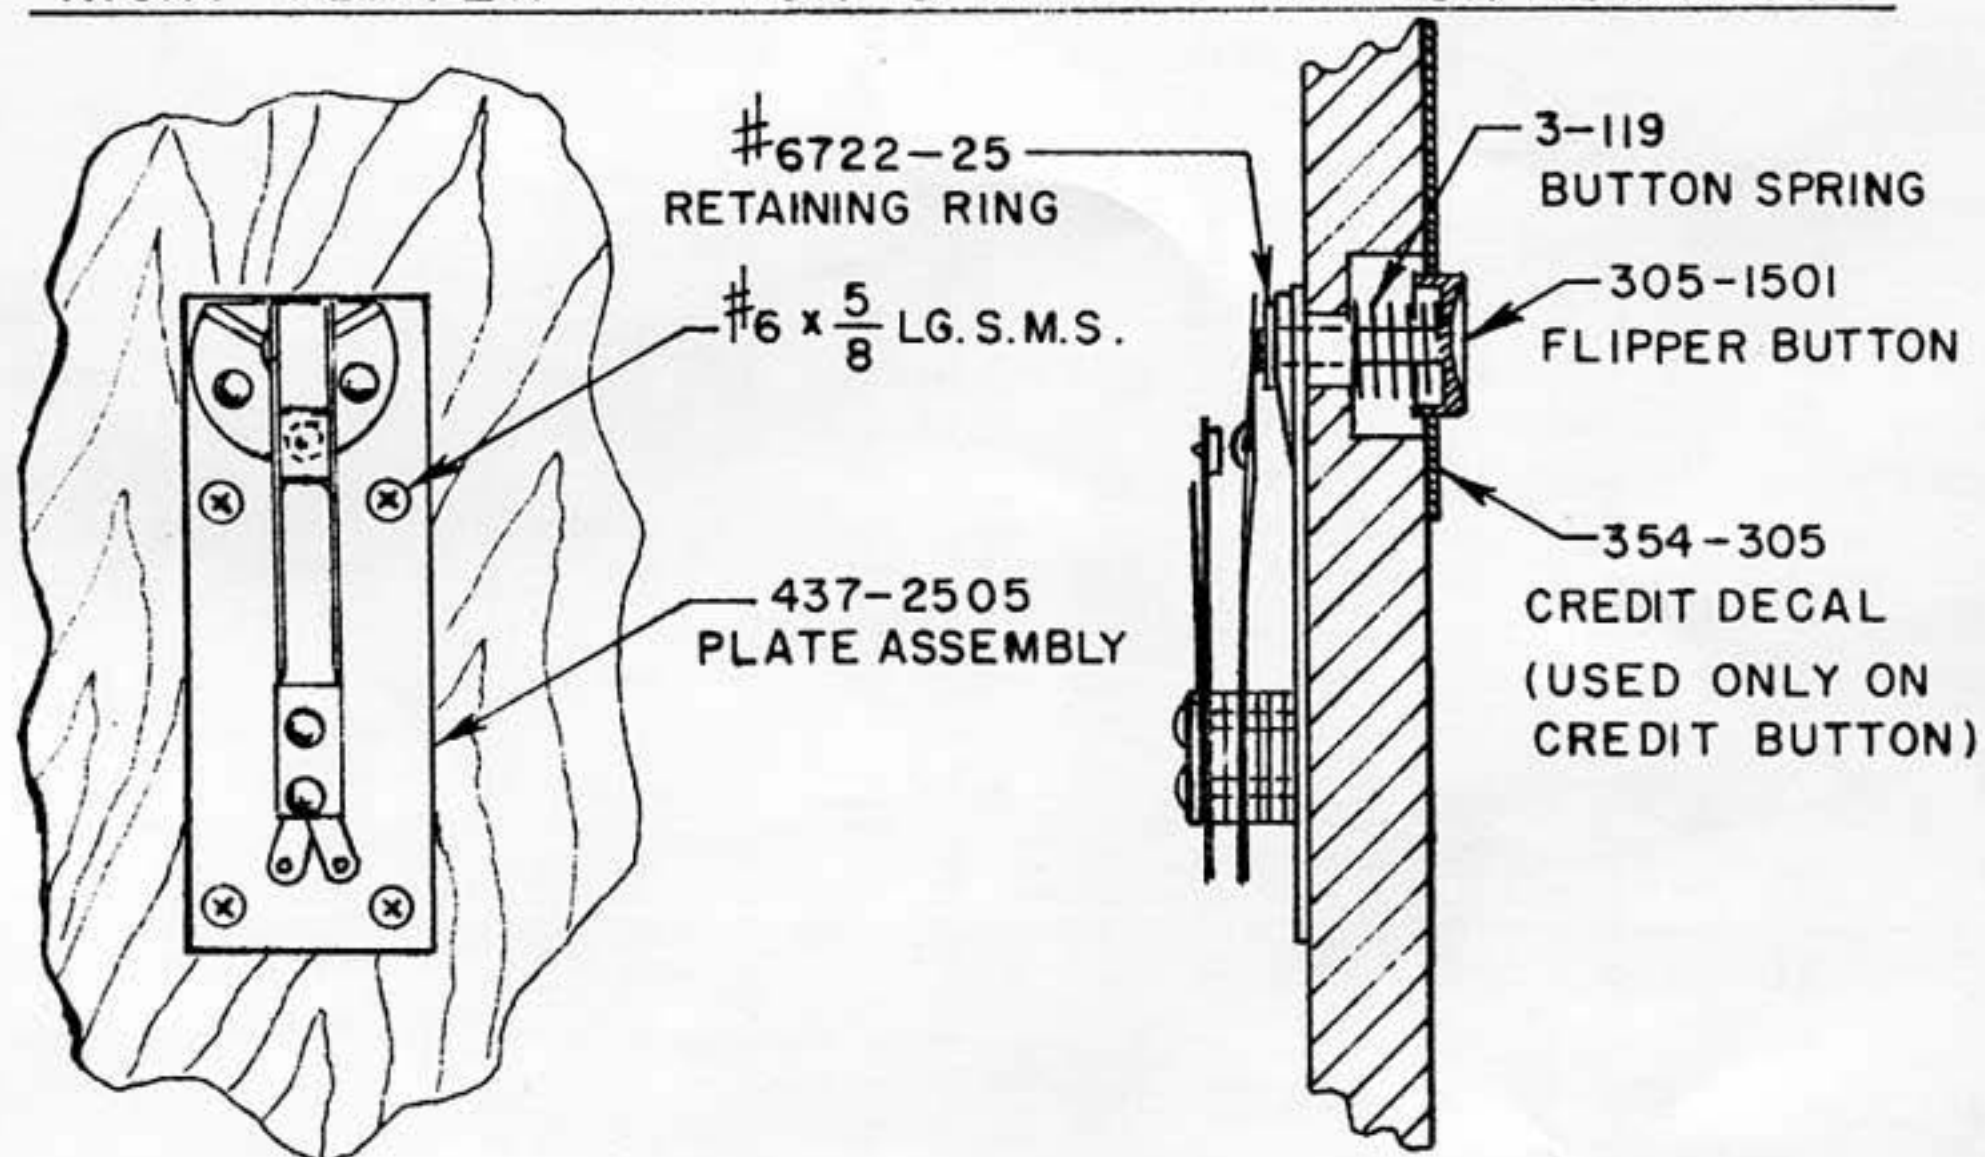

LEFT FLIPPER BUTTON ASSEMBLY.

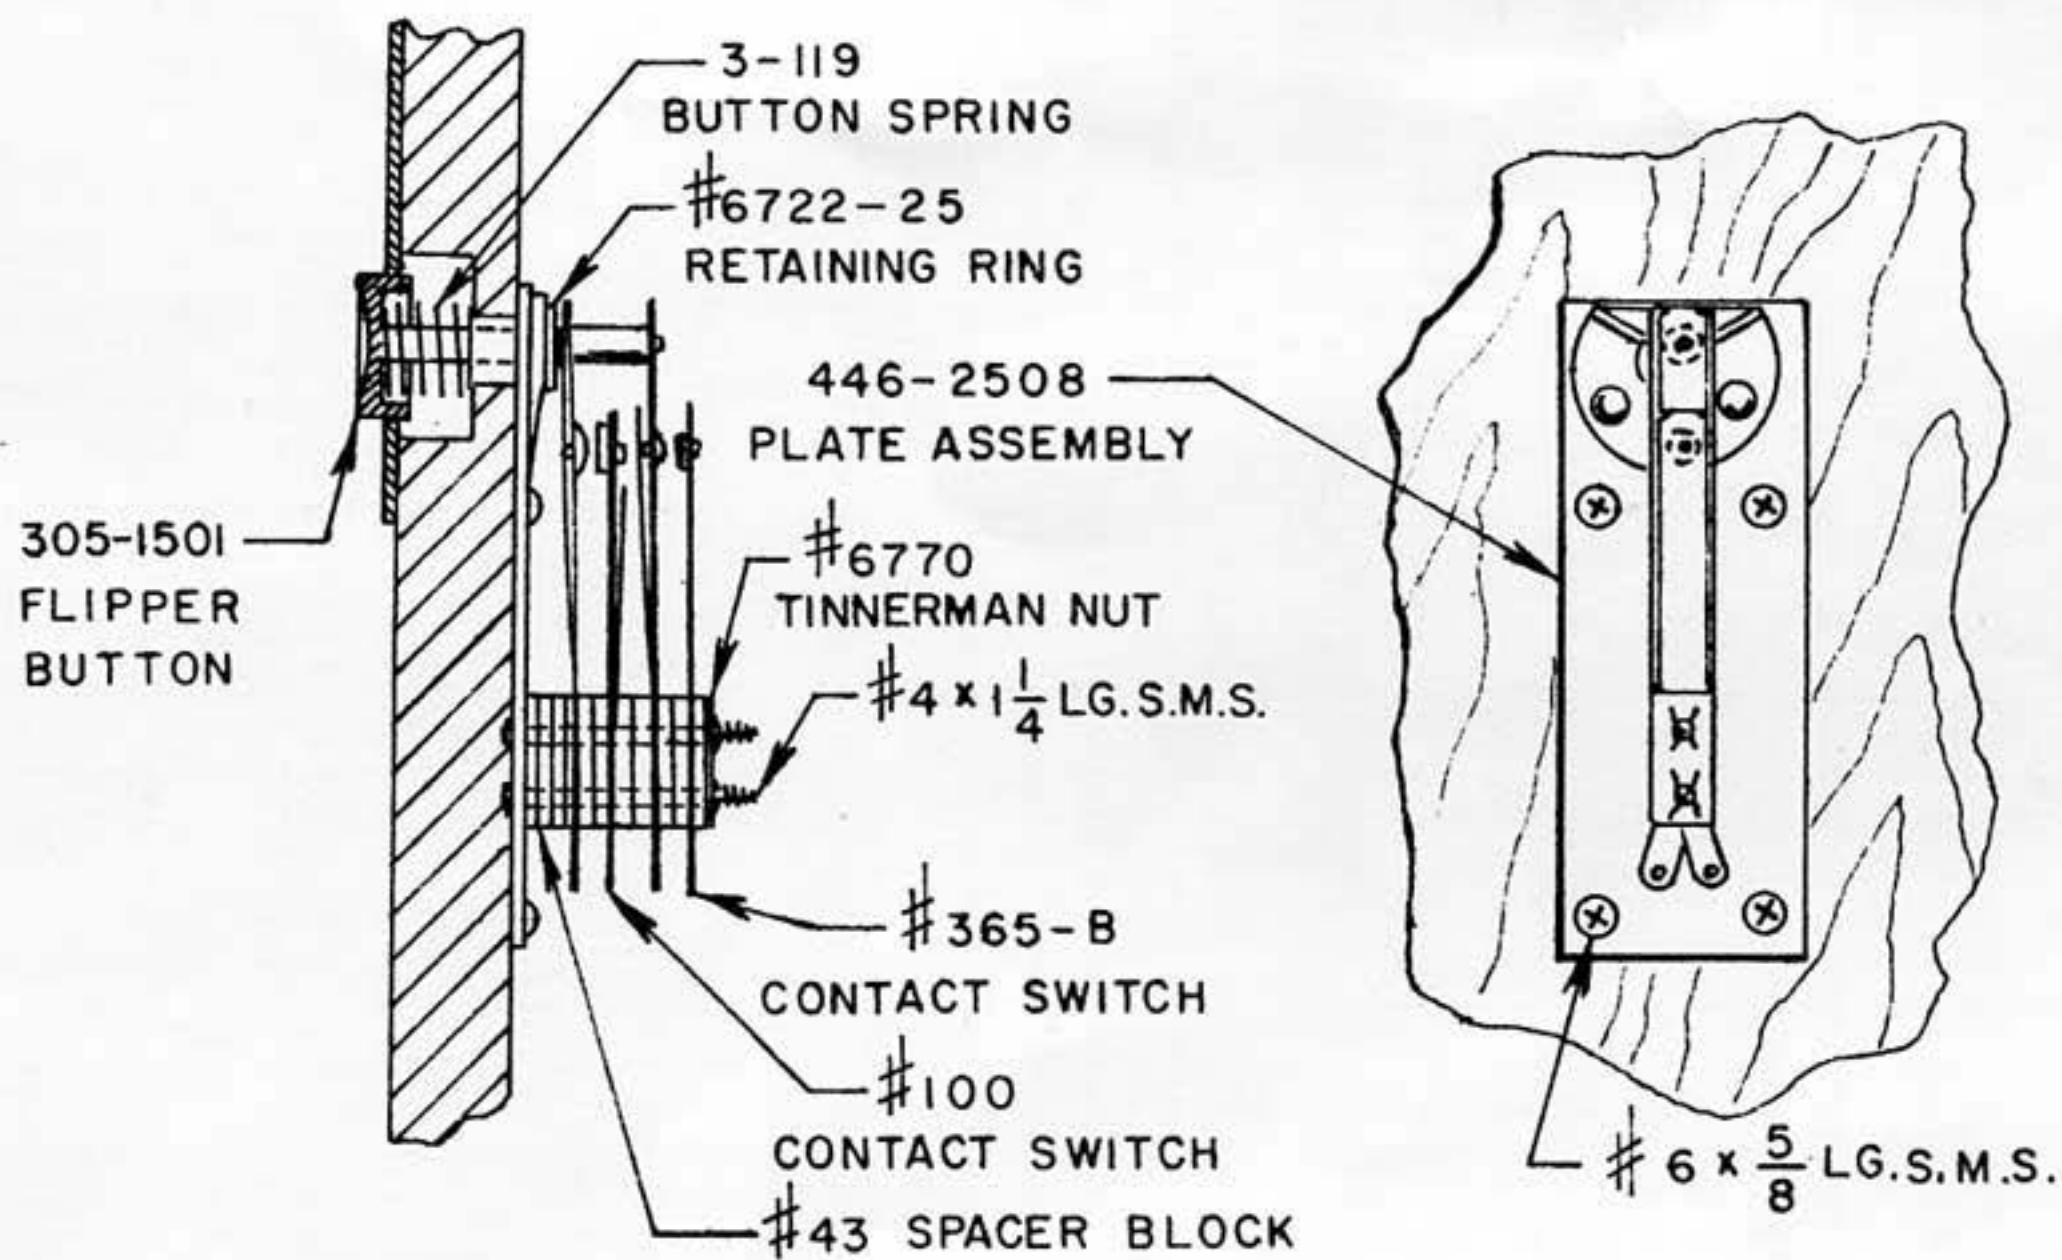

**CHICAGO
COIN**

RED BARON