

CHICAGO

GOIN

TOP TEN

(MODEL 455)

PARTS CATALOG

CHICAGO DYNAMIC INDUSTRIES, INC.

1725 DIVERSEY BOULEVARD



CHICAGO, ILLINOIS 60614



PHONE (312) 935-4600

INTRODUCTION

INTRODUCTION

**THIS PARTS CATALOG HAS BEEN COMPILED TO HELP THE SERVICEMAN
IN SELECTING THE PARTS NECESSARY FOR PROPER MAINTENANCE OF
CHICAGO COIN GAMES.**

**ALL MOTORS IN NEW CHICAGO COIN GAMES CARRY A 6 MONTHS WARRANTY
FROM DATE OF PURCHASE OF MACHINE.**

**ANY DEFECTIVE MOTOR WILL BE REPLACED FREE OF CHARGE BY YOUR
CHICAGO COIN DISTRIBUTOR.**

**WHEN ORDERING PARTS ALWAYS SPECIFY NAME OF UNIT, PART NUMBERS
AND A DESCRIPTION OF THE PART AS SHOWN IN THIS CATALOG.**

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

ADJUSTMENTS

HI-SCORE POINT ADJUSTMENT FOR SCORES UNDER 110,000

(11,000 TO 20,000) - G-GREY					
(21,000 TO 30,000) - W-BLK		6000-			-1000
(31,000 TO 40,000) - RED		7000-			-2000
(41,000 TO 50,000) - BROWN		8000-			-3000
(51,000 TO 60,000) - MAROON		9000-			-4000
(61,000 TO 70,000) - ORANGE		0000-			-5000
(71,000 TO 80,000) - GREY					
(81,000 TO 90,000) - YELLOW					
(91,000 TO 100,000) - BLACK					
(101,000 TO 110,000) - BLU-R					

EXAMPLE:

RED WIRE INTO 1000 POSITION SCORES AT 31,000

BROWN WIRE INTO 0000 POSITION SCORES AT 50,000

HI-SCORE POINT ADJUSTMENT FOR SCORES OVER 100,000

(101,000 TO 110,000) - BLU-R					
(111,000 TO 120,000) - G-GREY		6000-			-1000
(121,000 TO 130,000) - W-BLK		7000-			-2000
(131,000 TO 140,000) - RED		8000-			-3000
(141,000 TO 150,000) - BROWN		9000-			-4000
(151,000 TO 160,000) - MAROON		0000-			-5000
(161,000 TO 170,000) - ORANGE					
(171,000 TO 180,000) - GREY					
(181,000 TO 190,000) - YELLOW					
(191,000 TO 199,000) - BLACK					

EXAMPLE:



RED WIRE INTO 1000 POSITION SCORES AT 131,000

BROWN WIRE INTO 0000 POSITION SCORES AT 150,000


HIGH SCORE POINT ADJ.

HIGH SCORE — LOW SCORE ADJ.

SCORES UNDER 110,000 SCORES OVER 100,000

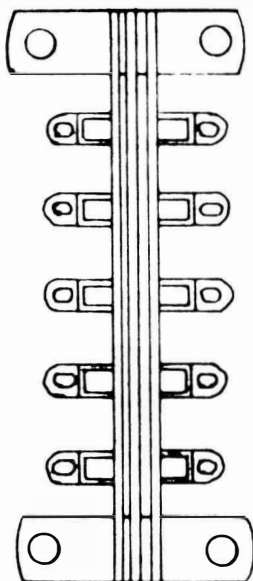

HIGH SCORE ADJ.




RIGHT CHUTE ADJUSTMENT

2 PLAYS

3 PLAYS


4 PLAYS

5 PLAYS

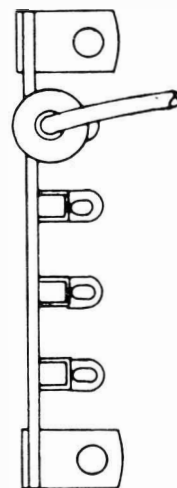


MATCH

ON OFF



GAME ADJ.


3 BALLS 5 BALLS

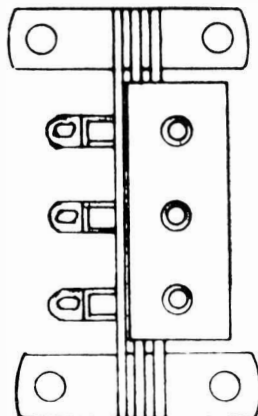

1 COIN - 1 PLAY
2 COINS - 3 PLAYS

ON


OFF



CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

CASH COMPARTMENT

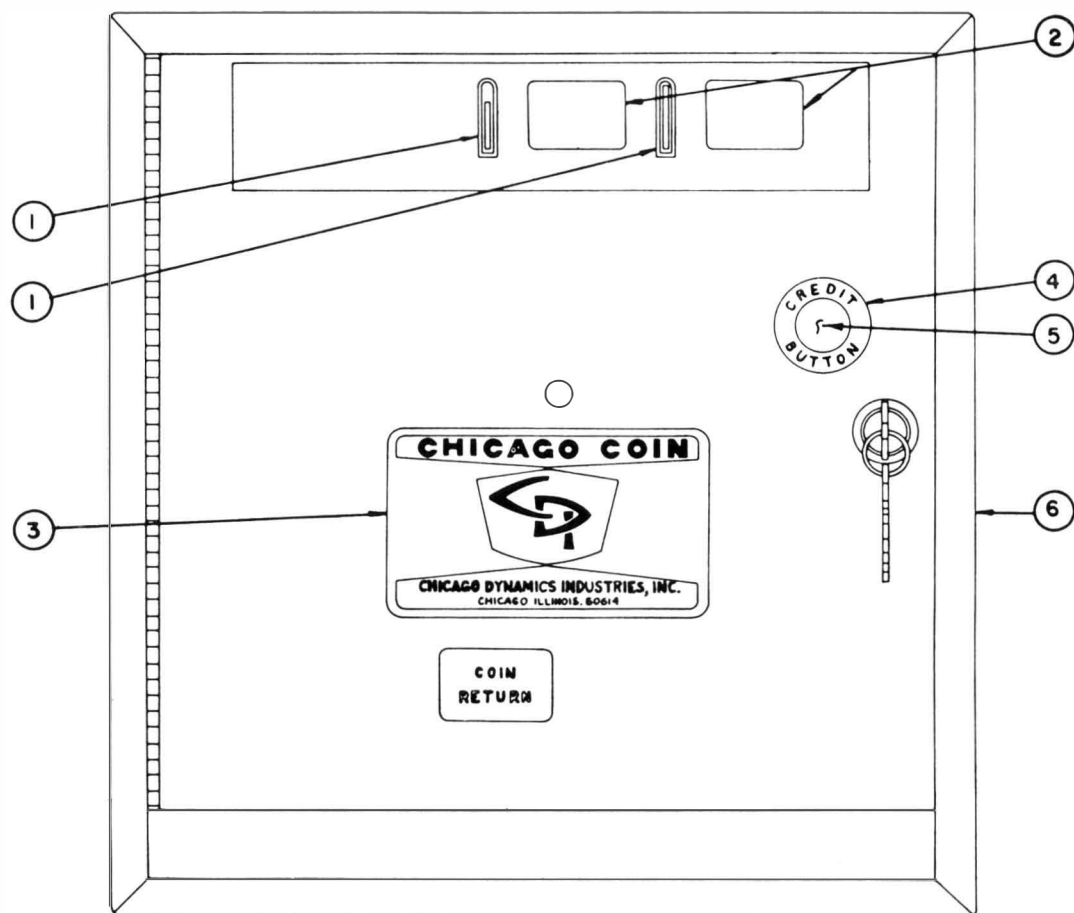


<u>ITEM</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	382-800	COIN ENTRY MOLDING (SEE PAGE 26)
2		COIN DENOMINATION WINDOW (SEE PAGES 26 & 27)
3	#6883	C.D.I. DECAL
4	354-305	CREDIT DECAL
5	382-1500-R	CREDIT BUTTON
6	384-2502	FRONT DOOR FRAME ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

CASH COMPARTMENT DOOR

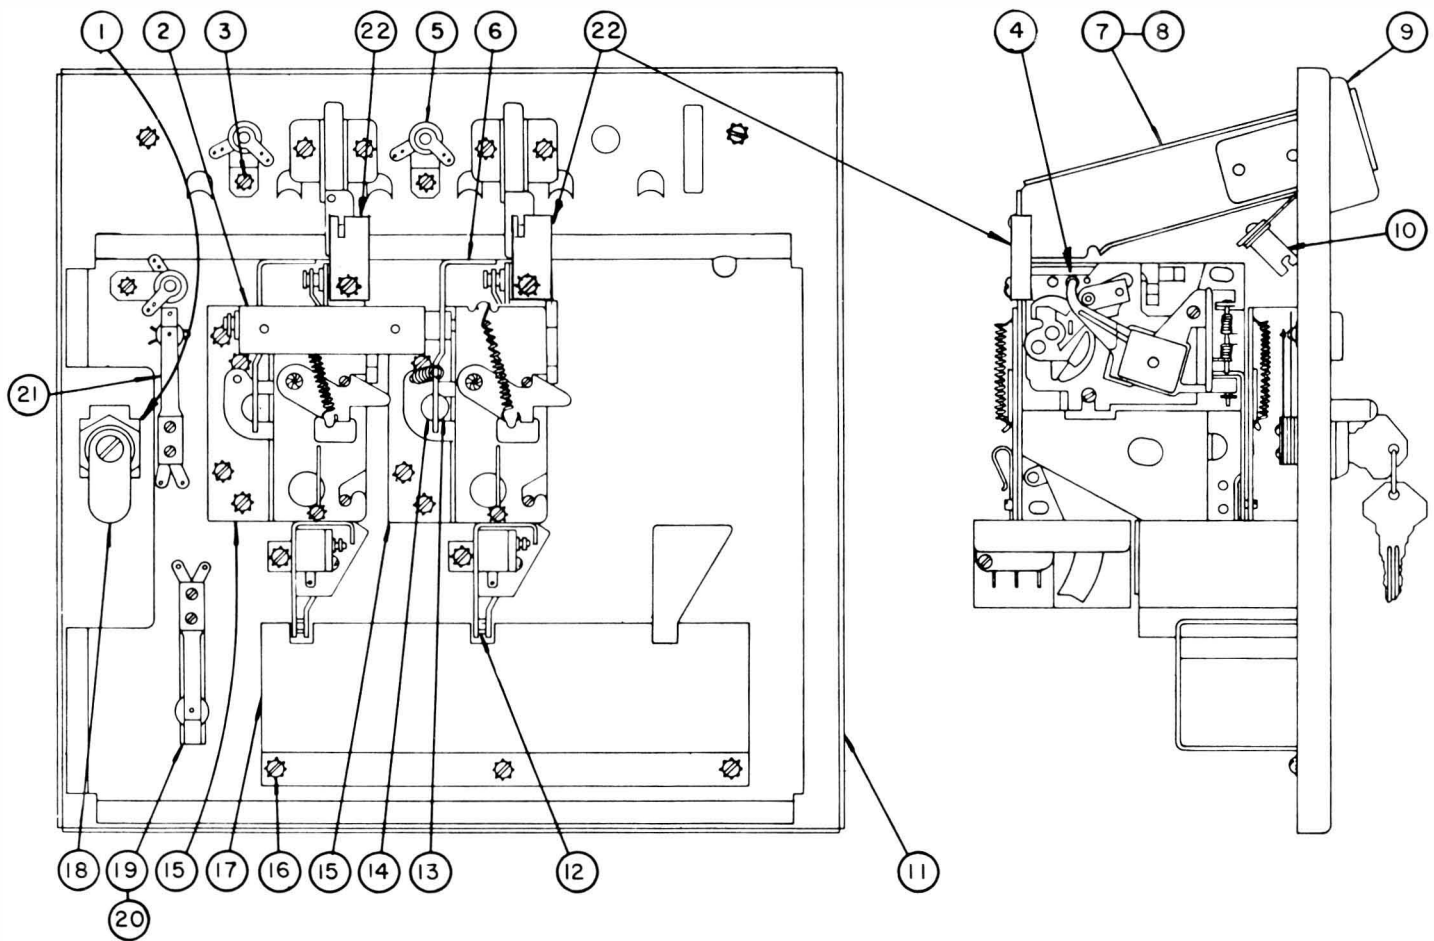


ITEM	PART NO.	DESCRIPTION
	382-2505-S	COMPLETE FRONT DOOR ASSEMBLY
1	246-551	LOCK PLATE
2	326-521	REJECTOR BRACKET
3		#6-32 x 1/4 LG. SEMS UNIT
4	#6801	COIN ACCEPTOR INSERT (SPECIFY COIN DENOMINATION)
5	#5266	BAYONET SOCKET
	#521 2	BULB
6	326-2510	REJECTOR ARM & BUSHING ASS'Y
	#5303	WASHER
	#6722-18	RETAINING RING
7	382-2501	COIN GUIDE ASSEMBLY
8	382-2502	COIN GUIDE COVER ASS'Y
	382-2502-A	COIN GUIDE COVER ASS'Y FOR 25¢
		COIN ACCEPTOR ONLY
9	382-2504-B-C	COIN WINDOW BRACKET ASS'Y
10	#5265	BAYONET SOCKET
11	382-2507-X	FRONT DOOR & REINFORCEMENT ASSEMBLY

ITEM	PART NO.	DESCRIPTION
12	333-2528	REJECTED COIN CONCUR FUNNEL ASS'Y
13	326-1505	REJECTOR ROD
14	#6828-37	RETAINING RING
15	333-2530-S	HOUSING, MICRO SW. & COIN LOCK OUT COIL ASSEMBLY (248-301 COIL)
	326-2522	HOUSING SHELL ASSEMBLY (326-2522-S WITH COIN LOCK OUT COIL MOUNTED)
	248-301	MICRO SWITCH (SPECIFY COIN DENOMINATION FOR PROPER MICRO SW.)
16		#8-32 x 1/4 LG. SEMS UNIT
17	326-2527	COIN RETURN HOUSING ASS'Y
18	#6877-C	LOCK CAM
	#6719	LOCK
19	#220	SWITCH ASSEMBLY
20	326-544-A	ANTI-GROUNDING FINGER
21	#362	SWITCH ASSEMBLY
22	248-510	CENTERING BRACKET

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

TOP OF PLAYFIELD

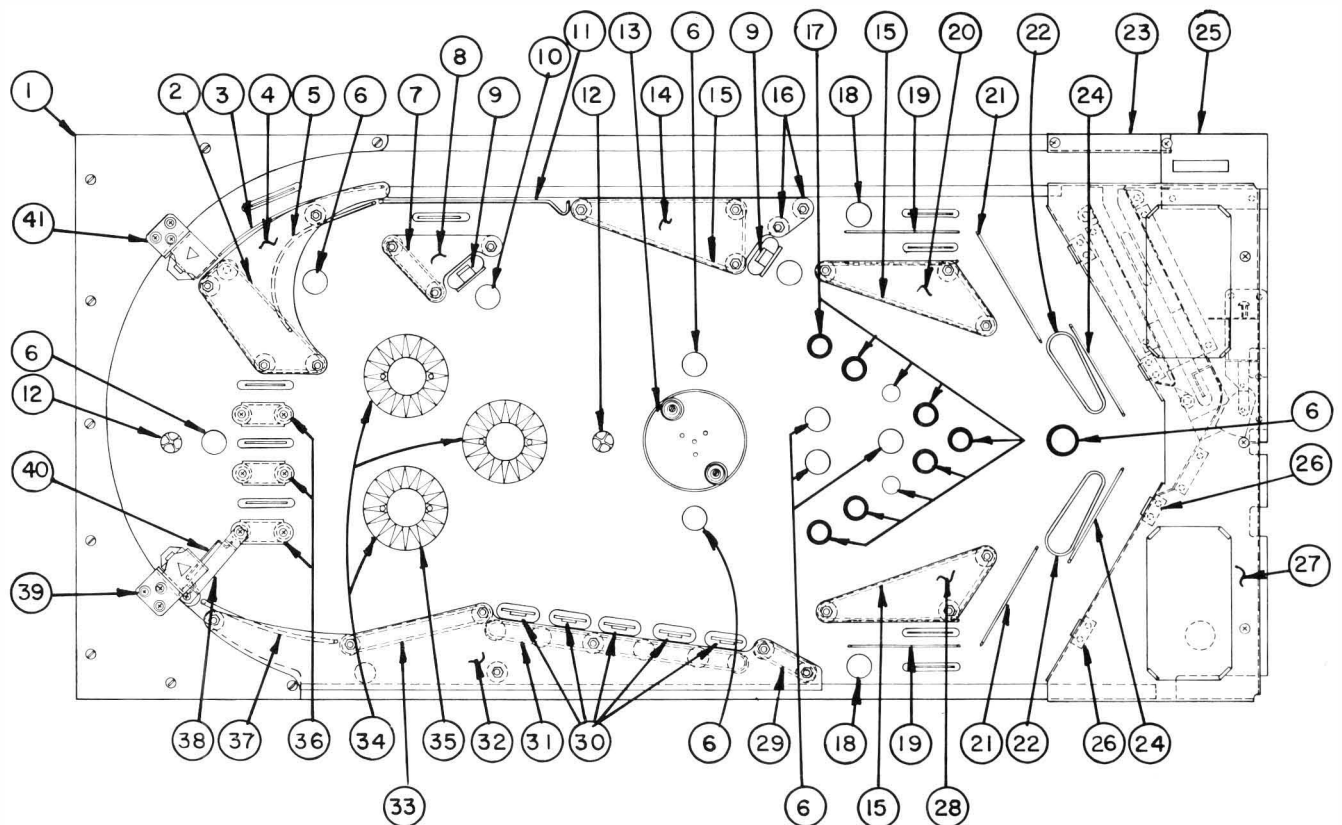


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	452-502	METAL ARCH TOP (PAINTED)	19	439-903-A	PLAYFIELD WIRE FORM
	295-514	METAL ARCH BOTTOM	20	455-300-E	PLAYFIELD LIGHT SHIELD (*)
	295-512	METAL ARCH SPACERS	21	439-903-B	PLAYFIELD WIRE FORM
2	#6056	3" DIA. RUBBER RING	22		FLIPPER ASS'Y (SEE PAGE 9)
3	393-902	BALL GATE WIRE FORM	23	326-528	STRIKE PLATE
4	455-300-B	PLAYFIELD LIGHT SHIELD (*)	24	431-900	PLAYFIELD WIRE FORM
5	455-900	WIRE FORM	25	455-501-S	SHOOTER INDICATOR (SCREENED)
6	#16528-W	1" DIA. PANEL INSERT (WHITE)	26	439-502	INSTRUCTION PLATE RETAINER
7	#6052	1-1/2" DIA. RUBBER RING	27	455-500-S	INSTRUCTION PLATE (SCREENED)
8	455-300-C	PLAYFIELD LIGHT SHIELD (*)	28	455-300-F	PLAYFIELD LIGHT SHIELD (*)
9	455-2505	TARGET & SWITCH ASS'Y (SEE BACK INSIDE COVER)	29	#6051	1" DIA. RUBBER RING
10	#16528-Y	1" DIA. PANEL INSERT (YELLOW)	30	455-2508	DROP TARGET ASS'Y (SEE PAGE 12)
11	455-902	WIRE FORM	31	#6057	4" DIA. RUBBER RING (2-REQ'D. BEHIND DROP TARGETS)
12	408-2502	ROLL OVER BUTTON ASS'Y (SEE BACK INSIDE COVER)	32	455-300-A	PLAYFIELD LIGHT SHIELD (*)
13	455-2512	SPINNER ASS'Y (SEE PAGE 13)	33	#6053	2-1/2" DIA. RUBBER RING
14	455-300-D	PLAYFIELD LIGHT SHIELD (*)	34	455-2518	THUMPER BUMPER ASS'Y (SEE PAGE 10)
15	#6054	3-1/2" DIA. RUBBER RING	35	431-301	ACETATE WAFER
16	#16533	PLASTIC POSTS	36	#16540-R	TWO SIDED GUIDE RAIL 1-1/2" LG. (RED)
	326-1507-A	ACETATE COVER MTG. POST	37	455-901	WIRE FORM
	#6060	5/16" DIA. RUBBER RING	38	339-2502-L	LANE GATE & STOP BRKT. ASS'Y
17	#16529-W	3/4" DIA. PANEL INSERT (WHITE)	39	231-2517-L	BALL GATE ASS'Y (LEFT)
18	#16528-R	1" DIA. PANEL INSERT (RED)	40	452-901	LANE GATE WIRE FORM
			41	231-2517-R	BALL GATE ASS'Y (LEFT)

* MOUNTED WITH #6-32 HEX NUT

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

BALL EJECTOR UNIT

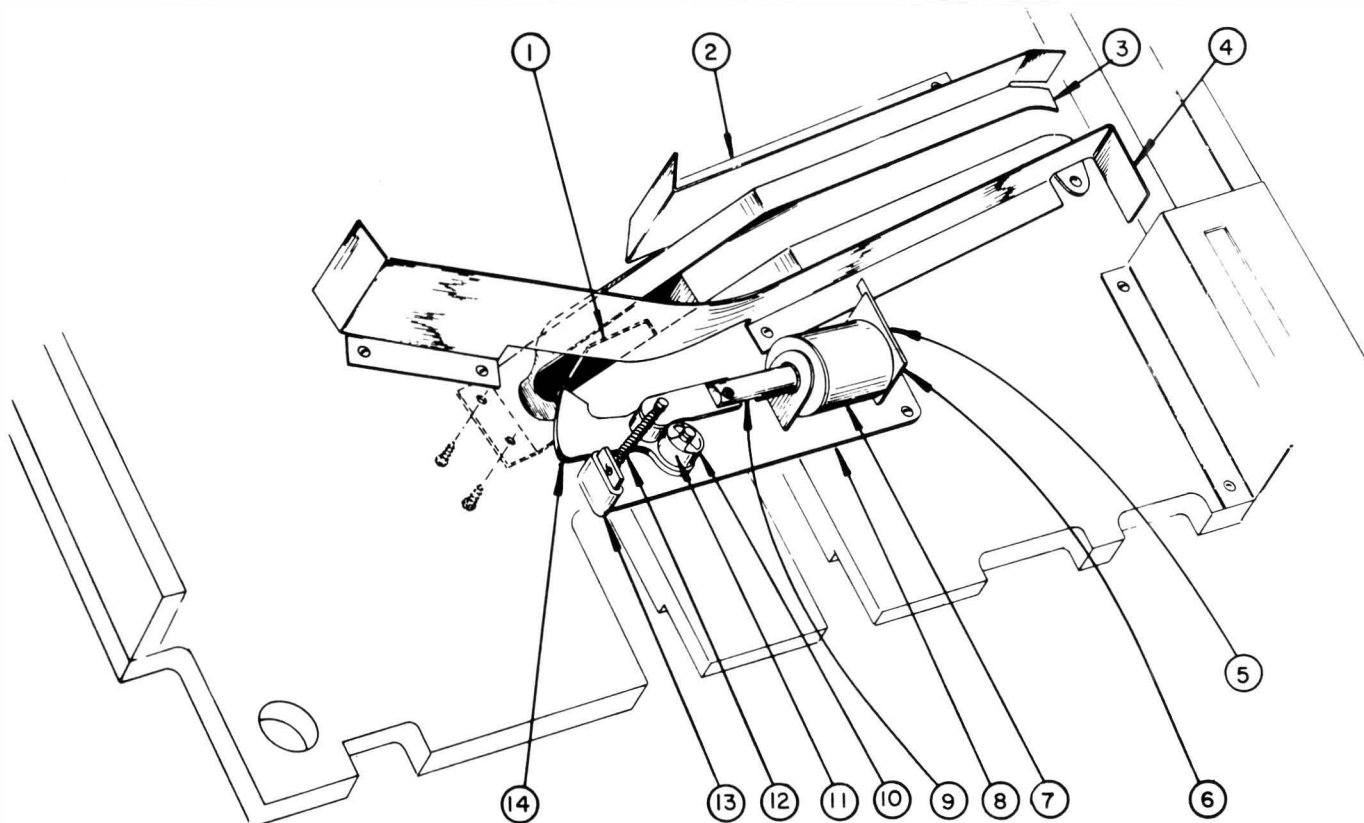


<u>ITEM</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	326-904	BALL EJECTOR WIRE FORM
2	326-512	UPPER BALL RETURN GUIDE RAIL
3	326-508	BALL RETURN RUNWAY
4	326-513	LOWER BALL RETURN GUIDE RAIL
5	366-2505-A	COMPLETE BALL EJECTOR UNIT
		THE FOLLOWING ITEMS ARE IN 366-2505-A ASS'Y
6	124-2500	PLUNGER STOP ASS'Y
7	J-22-550	COIL COMPLETE
	130-1535	SOLENOID TUBING
8	326-2519	BALL EJECTOR MTG. PLATE & STUD ASS'Y
9	366-2506	PLUNGER & LINK ASS'Y
10	#6722-25	RETAINING RING
11	#5373	WASHER
12	326-902	PLUNGER RETURN SPRING
13	326-302	PLASTIC SLEEVE
14	366-2504	BALL EJECTOR ARM ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

UNDERSIDE OF PLAYFIELD

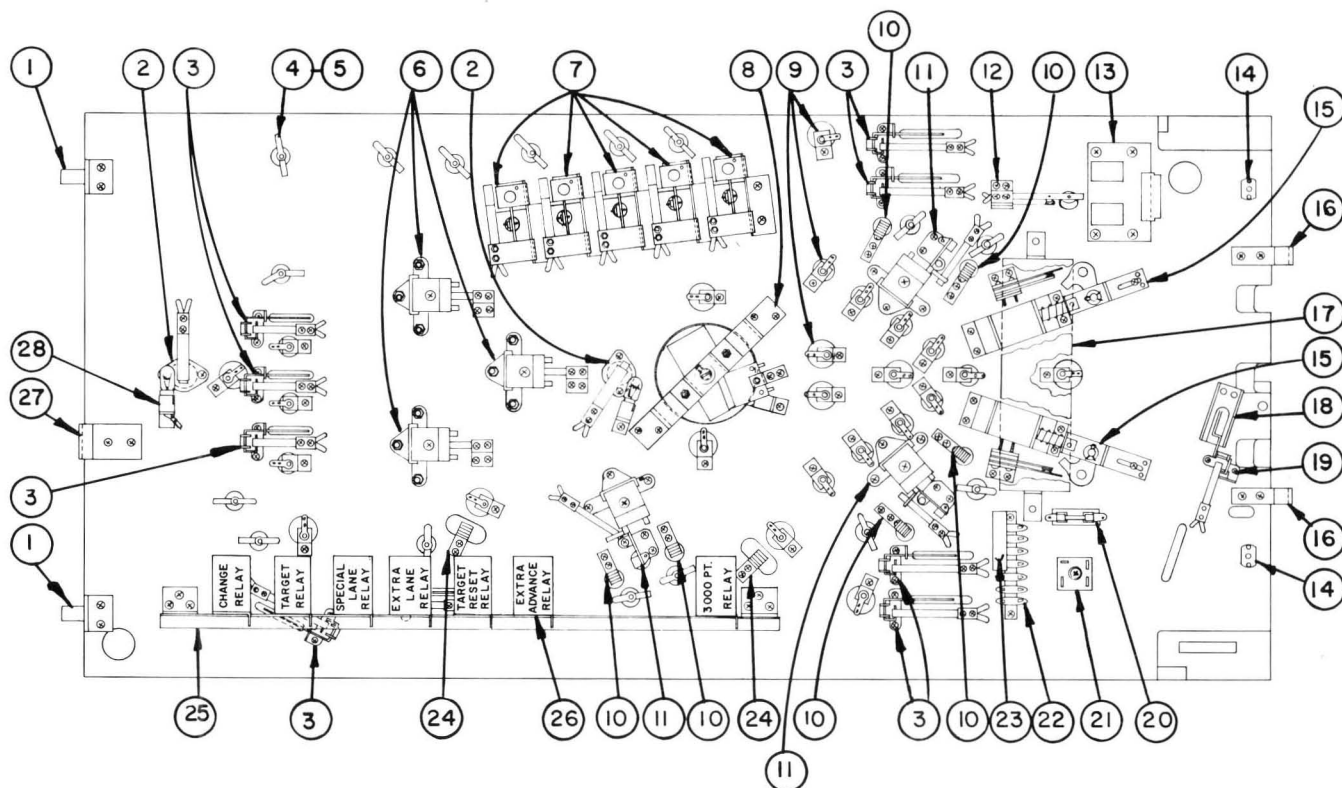


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	295-2529	PLAYFIELD LOCK ASS'Y	15		FLIPPER ASS'Y (SEE PAGE 9)
2	408-2502	ROLL OVER BUTTON ASS'Y (SEE BACK INSIDE COVER)	16	326-525	PLAYFIELD SUPPORT BRACKET
3	295-2557	ROLL OVER WIRE FORM ASS'Y	17	437-2507	FLIPPER COVER & LEG ASS'Y
4	#5232	BAYONET SOCKET	18		BALL EJECTOR UNIT (SEE PAGE 7)
5	#5112	#47 BULBS IN ALL THE SOCKET	19	326-904	BALL EJECTOR WIRE FORM
6	455-2518	THUMPER BUMPER ASS'Y (SEE PAGE 10)		295-511	ROLL OVER MTG. BRACKET
7	455-2508	DROP TARGET ASS'Y (SEE PAGE 12)	20	#5747-1	1 PLACE FUSE BLOCK ASS'Y
8	455-2512	SPINNER UNIT (SEE PAGE 13)		#5710-010	10 AMP. FUSE
9	#5240	BAYONET SOCKET	21	#5608-1	RECTIFIER
10	#434	CONTACT SWITCH ASS'Y	22	#6685-7	7 PLACE TERMINAL STRIP
	295-530-B	PLAYFIELD CONTACT BRKT.	23	#5607-A-1/200	1 MFD 20 VDC CAPACITOR
11		ACTION KICKER (SEE PAGE 11)	24	455-2505	TARGET SWITCH ASS'Y (SEE BACK INSIDE COVER)
12	339-514	TILT CONTACT BRACKET	25	129-2526-9	GANG MTG. FRAME ASS'Y
	#302	TILT CONTACT SWITCH	26		FOR ALL THESE RELAYS SEE PAGE 22
13	455-2515	ELECTRIC EYE RELAY BOARD (SEE PAGE 17)	27	295-588	PLAYFIELD LIMIT BRACKET
14	#6807	#8-32 "T" NUT	28	#5206	BAYONET SOCKET

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

FLIPPER ASSEMBLY

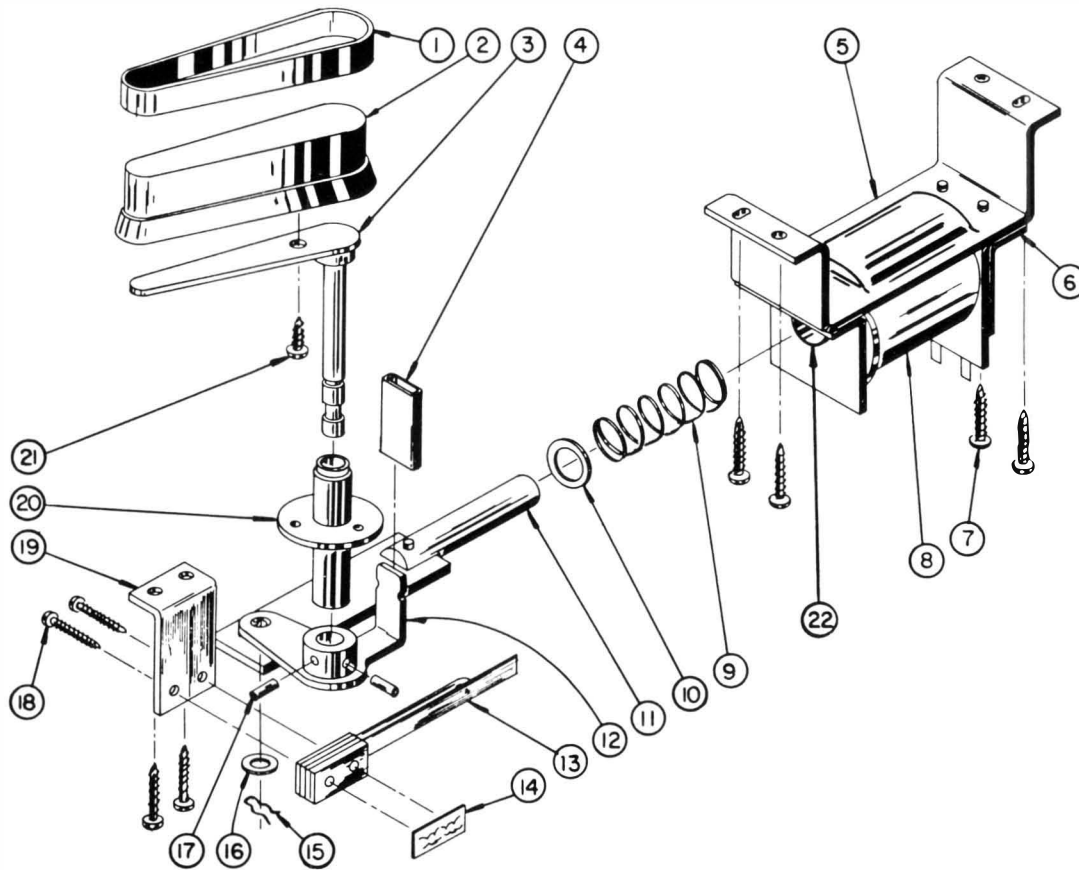


ITEM	PART NO.	DESCRIPTION
1	#6064	FLIPPER RUBBER RING
2	#16550	3" FLIPPER
3	393-2501	FLIPPER PLATE & SHAFT ASS'Y
4	#6527	1" LG. PLASTIC SLEEVING
5	347-2511	FLIPPER COIL MOUNTING BRACKET ASS'Y
6	347-2512	PLUNGER STOP ASS'Y
7		#6 x 1/2" LG. TYPE "A" RD. HD. PHILLIP S.M.S.
8	FJ-29-400	COIL COMPLETE

	21-375	
9	209-901	FLIPPER SPRING
10	#5348	WASHER
11	393-2504-G	FLIPPER PLUNGER & OPERATING LINK ASS'Y
12	231-2536-L	FLIPPER ARM ASS'Y
	231-2536-R	FLIPPER ARM ASS'Y (RIGHT HAND SHOWN)
13	#294-BR	CONTACT ASS'Y (SHOWN)
	#294-BL	CONTACT ASS'Y
14	#6770	TINNERMAN NUT
15	91-905	SPRING CLIP
16	#5357	WASHER
17		#10-32 x 1/2 LG. SOCKET HD. CAP SCREW
18		#4 S.M.S. (LENGTH AS REQUIRED)
19	295-559	CONTACT MOUNTING BRACKET
20	#16508-W	FLIPPER BUSHING
21		#6 x 7/16" LG. TYPE "E" TAPPING SCREW
22	130-1535	BRASS TUBING

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

THUMPER BUMPER ASSEMBLY

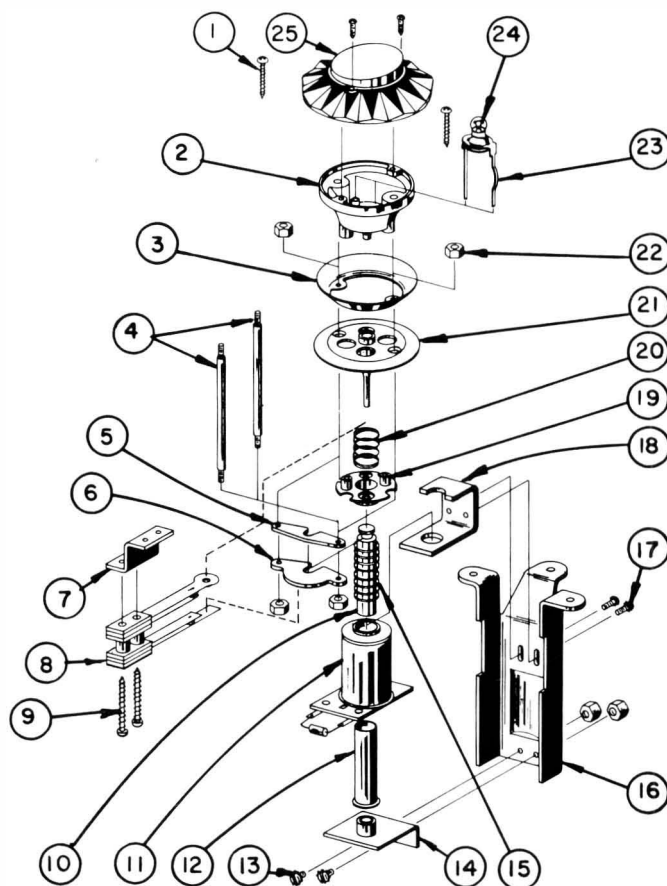


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	455-2518	COMPLETE THUMPER BUMPER ASS'Y	12	130-805	SOLENOID TUBING
1		#8 x 3/4 LG. RD. PHILLIP HD. SELF TAPPING SCREW	13		#6-32 x 3/8 LG. SEMS UNIT
2	#16511-W	THUMPER BODY	14	439-2510	PLUNGER STOP ASS'Y
3	312-504	THUMPER RING	15	437-900	SPRING (RED)
4	231-1507	POWER BUMPER RODS	16	393-508	COIL MTG. BRACKET
5	119-512	FIBER PLUNGER ARM	17		#6-32 x 1/4 LG. SEMS UNIT
6	119-503	BRASS PLUNGER ARM	18	119-502	COIL SUPPORT BRACKET
7	431-504	CONTACT MTG. BRACKET	19	#16512	BUMPER BASE
8	#433	SWITCH ASS'Y	20	3-119	SPRING
	#191-B	SWITCH ASS'Y	21	#16513-B-Y	WAFER THUMPER
9		#4 S.M.S. (LENGTH AS REQUIRED)	22	#6933-B	#6-32 ELASTIC STOP NUT
10	119-1507	PLUNGER	23	#5234	SOCKET
11	FJ-25-850	D.C. COIL COMPLETE	24	#5112	#47 BULB
	#5612-4004	DIODE	25	#16563-B	YELLOW 100 DIAMOND SUNFLOWER CAP

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

ACTION KICKER

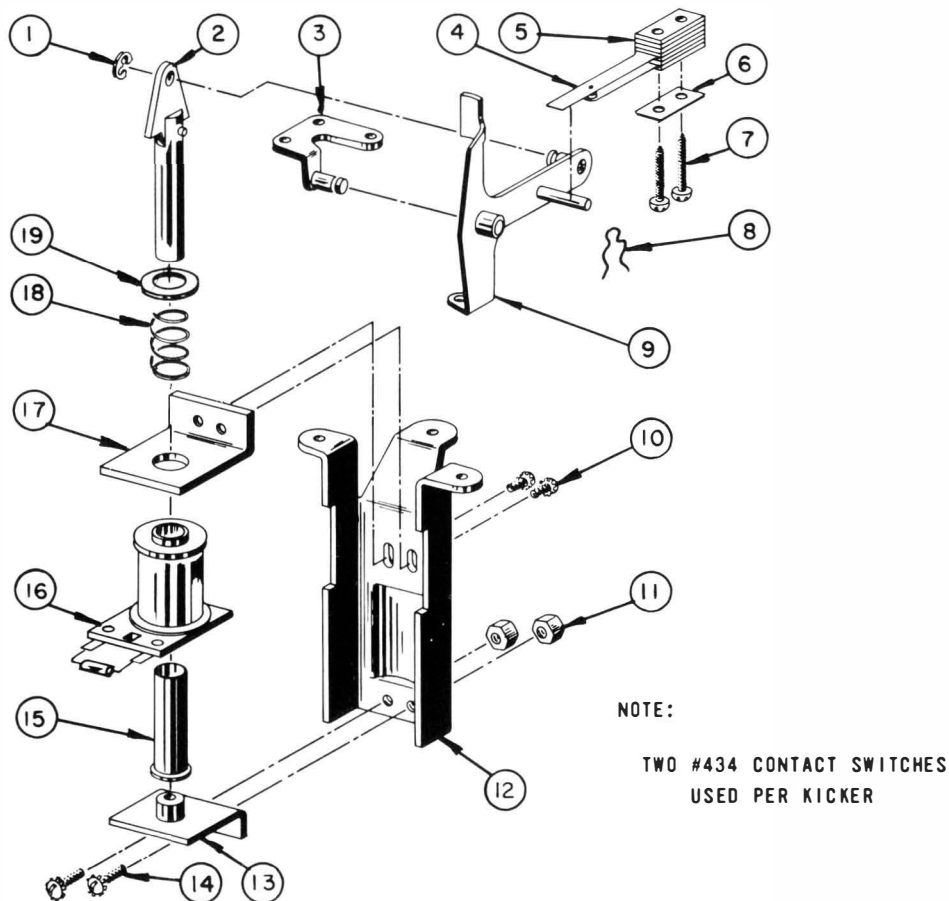


ITEM	PART NO.	DESCRIPTION
1	#6722X21	RETAINING RING
2	295-2513	PLUNGER & LINK ASS'Y
3	295-2509	KICKER ARM BRACKET ASS'Y
4	#26	SWITCH ASS'Y
5	#43	SPACER BLOCK
6	#6771	TINNERMAN SPACER
7		#4 X 1" LG. S.M.S.
8	91-905	SPRING CLIP
9	331-2510	KICKER ARM ASS'Y (WITH POST)
10		#6-32 X 1/4" LG. SEMS UNIT
11		#6-32 HEX NUT
12	393-508	COIL MOUNTING BRACKET
13	439-2510	PLUNGER STOP ASS'Y
14		#6-32 X 3/8" LG. SEMS UNIT
15	130-805	SOLENOID TUBING
16	FJ-25-1050	D.C. COIL COMPLETE
	#5612-4004	DIODE
17	347-508	COIL SUPPORT BRACKET
18	209-901	SPRING
19	#5348	WASHER

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

DROP TARGET UNIT

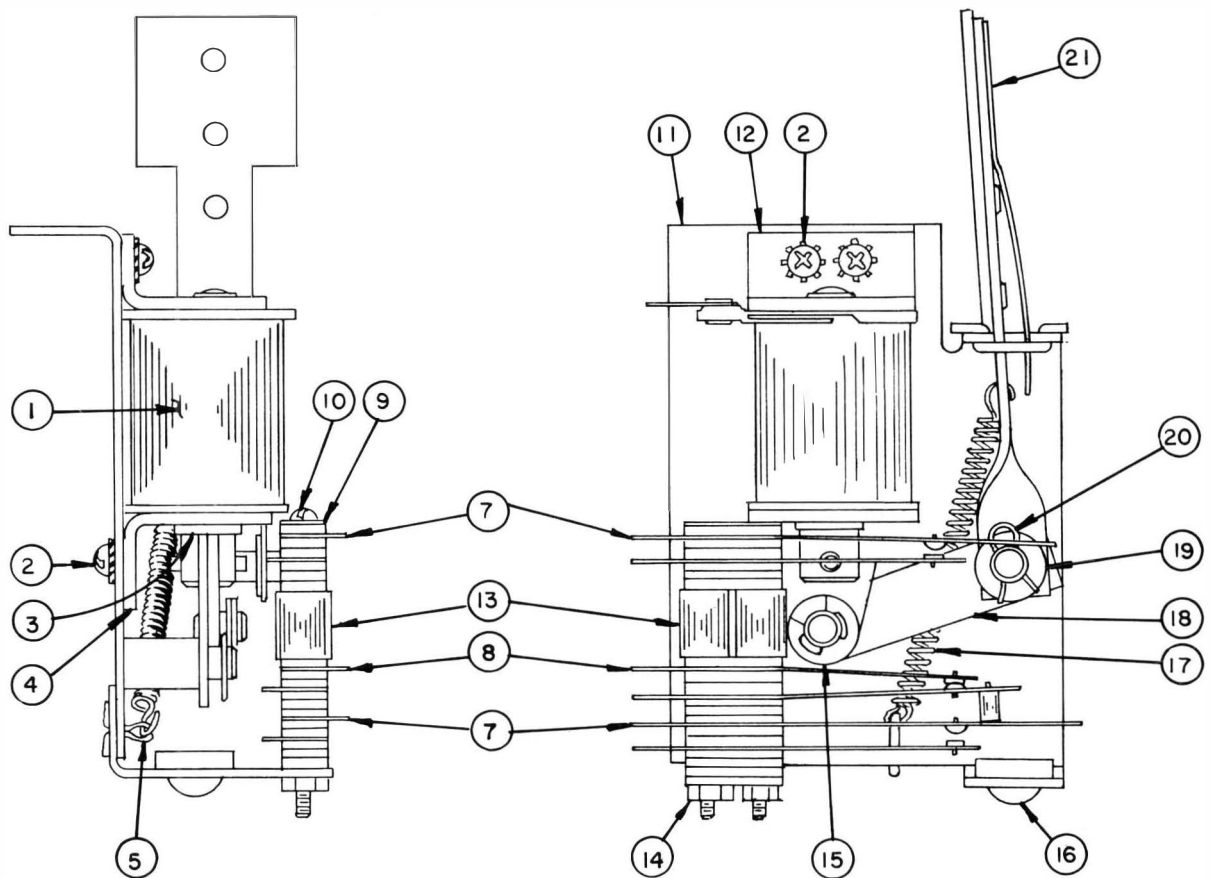


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	455-2508	COMPLETE DROP TARGET	11	439-2503	DROP TARGET MTG. BRKT. ASS'Y
1	J-22-550	COIL COMPLETE	12	347-2512	PLUNGER STOP ASS'Y
2		#6-32 x 1/4 LG. SEMS UNIT	13	#16552-8-1	PLASTIC SPACER
3	130-1536	SOLENOID TUBING	14		#4-40 HEX NUT
4	347-508	COIL SUPPORT BRACKET	15	#6722-25	RETAINING RING
5	#6753-8	3/32 DIA x 1/2" LG. COTTER PIN	16	#6079	RUBBER BUMPER
6	439-2509	PLUNGER & LINK ASS'Y	17	300-901-A	SPRING
7	#437	CONTACT SWITCH ASS'Y	18	439-2504	DROP TARGET RESET ARM ASS'Y
8	#437-C	CONTACT SWITCH ASS'Y	19	#5330	WASHER
9	#6771	TINNERMAN SPACER	20	91-905	SPRING CLIP
10		#4-40 x 2-1/2 LG. RD. HD. M.S.	21	455-2507	DROP TARGET ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


SPINNER UNIT

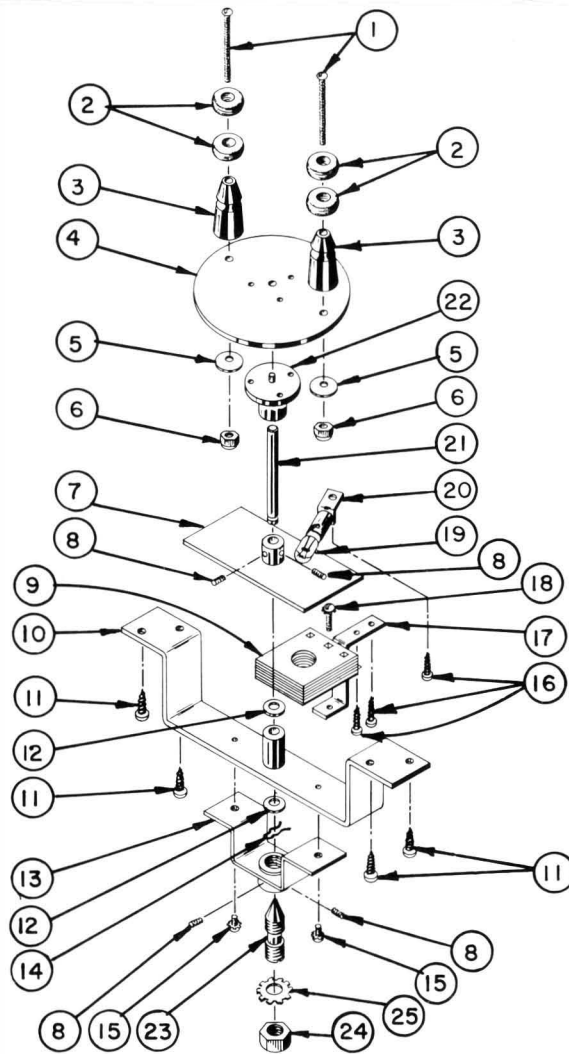

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1		#6-32 x 1-1/2 LG. RD. HD. M.S.	14	91-905	SPRING CLIP
2	#6060	RUBBER RING	15		#6-32 x 14" LG. SEMS
3	#16533	PLASTIC POST	16		#6 x 1/2" LG. RD. HD. S.M.S.
4	455-301	SPINNER DISC	17	#455-505	PHOTO CELL MTG. LEG
5	#5366	WASHER	18		#6-32 x 5/8" LG. SEMS
6	#6933-6	#6-32 ELASTIC STOP NUT	19	#5112	#47 BULB
7	455-2502	SHUTTER & BUSHING ASS'Y	20	#5206	BAYONET SOCKET
8		#8-32 x 1/4" LG. SET SCREW	21	455-1502	SPINNER SHAFT
9	455-2514	PHOTO CELL ASS'Y	22	455-1500	SPINNER FLANGE BUSHING
10	455-2503	SPINNER MTG. BRKT. ASS'Y	23	254-1500	TAPERED SET SCREW
11		#10 x 1/2" LG. RD. HD. S.M.S.	24		7/16-20 HEX JAM NUT
12	#5330	WASHER	25	#5481	7/16 EXTERNAL SHAKEPROOF LOCKWASHER
13	455-2504	TENSION ADJUSTMENT BRKT. ASS'Y			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

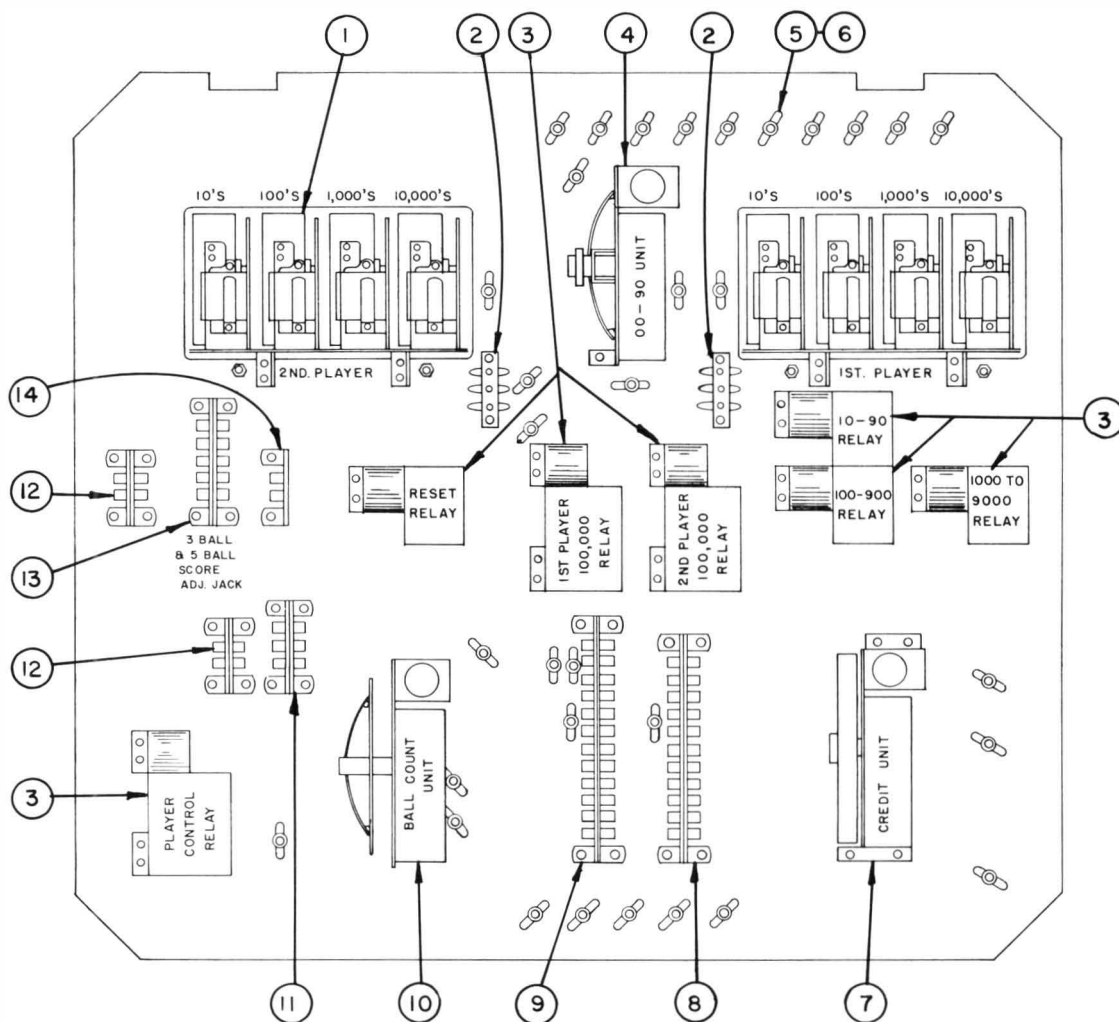


ITEM	PART NO.	DESCRIPTION
1		SCORING DRUM UNITS (SEE PAGE 24)
2	#6685-3	3 PLACE TERMINAL STRIP
3		FOR ALL THESE RELAYS SEE PAGES 22 & 23
4	130-2571-B	00-90 UNIT (SEE PAGE 19)
5	#5132	BAYONET SOCKET
6	#5112	#47 BULB
7	130-2532-C	CREDIT UNIT (SEE PAGE 20)
8	#5886	22 POINT REGULAR SOCKET
9	#5885	24 POINT REGULAR SOCKET
10	130-2568-A	BALL COUNT UNIT (SEE PAGE 21)
11	#5877	6 POINT REGULAR SOCKET
12	#5876	4 POINT REGULAR SOCKET
13	#5879	10 POINT REGULAR SOCKET
14	#5616	2 POINT STRAIGHT INLINE SOCKET

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

SUB PANEL

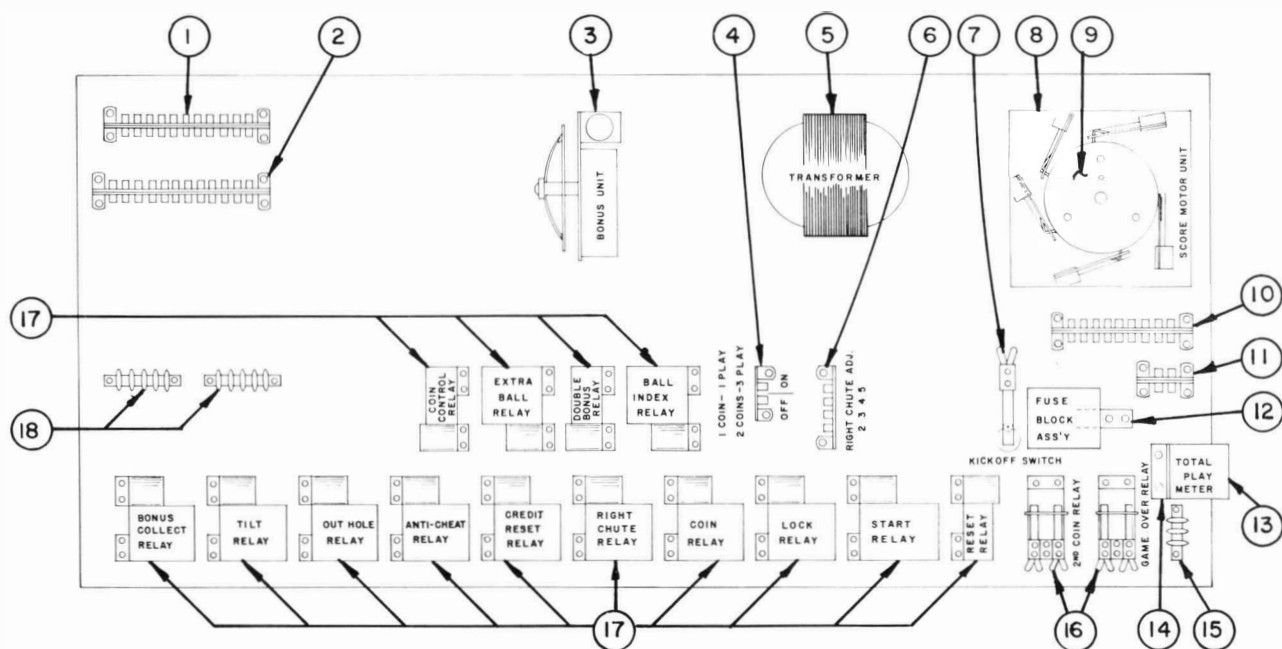


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	#5886	22 POINT REGULAR SOCKET	8	#5750-2333	SCORE MOTOR (60 Hz 22 R.P.M.)
2	#5885	24 POINT REGULAR SOCKET		#5750-2334	SCORE MOTOR (50 Hz 22 R.P.M.)
3	130-2519-A	BONUS UNIT (SEE PAGE 18)	9	455-2509	SCORE MOTOR CAM ASS'Y (SEE PAGE 25)
4	#5816	2 POINT INLINE SOCKET	10	#5883	18 POINT REGULAR SOCKET
5	#5666-2518	TRANSFORMER (SEE PAGE 28)	11	#5876	4 POINT REGULAR SOCKET
6	#5821	4 POINT STRAIGHT INLINE SOCKET	12	431-2504	5 PLACE FUSE BLOCK & MTG. BRKT, ASS'Y
7	#16520	KICK OFF SWITCH BUSHING	13	#5707	TOTAL PLAY METER
	295-1514	PLUNGER	14	393-512	METER MOUNTING BRACKET
	#6722-25	RETAINING RING	15	#6685-3	3 PLACE TERMINAL STRIP
	194	KICK OFF SWITCH	16		FOR THESE RELAYS SEE PAGE 23
8	455-2500	COMPLETE SCORE MOTOR ASS'Y	17		FOR ALL THESE RELAYS SEE PAGE 22
	393-2515	SCORE MOTOR MTG. PLATE ASS'Y	18	#6685-5	5 PLACE TERMINAL STRIP

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

TILT BOARD & KNOCKER ASSEMBLY

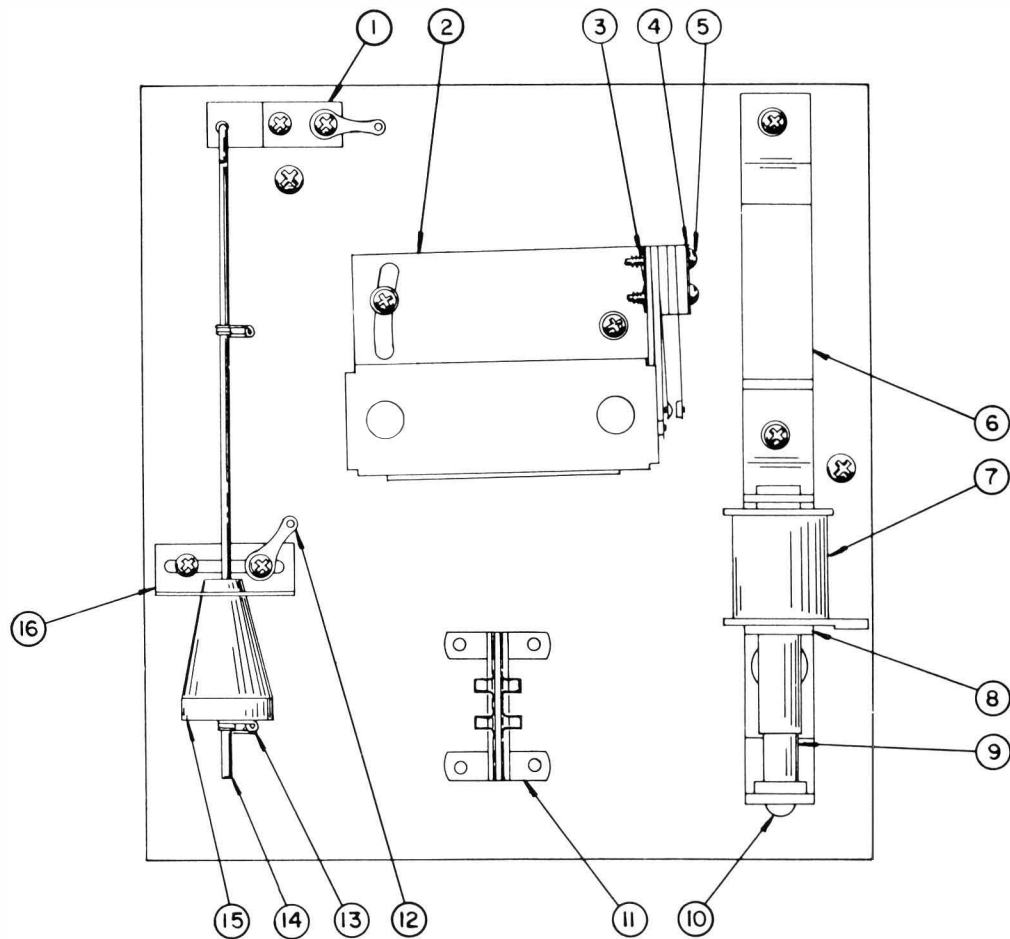


ITEM	PART NO.	DESCRIPTION
1	295-557	TILT PLUMB HANGER
2	339-511	ELEVATOR TILT
3	#6770	TINNERMAN NUT
4	#6771	TINNERMAN SPACER
5		#4 X 5/8" LG. S.M.S.
6	295-253B	KNOCKER MOUNTING BRACKET ASS'Y
7	N-26-1000	COIL COMPLETE
8	167-511	ADJ. COIL SUPPORT BRACKET
9	167-2507	PLUNGER & TIP ASSEMBLY
10	#6079	RUBBER GROMMET
11	#5876	4 POINT REGULAR SOCKET
12	#6654	SOLDERING LUG
13	231-907	TILT PLUMB SPRING
14	295-906	TILT PLUMB WIRE
15	295-1513	TILT PLUMB
16	295-556	TILT PLUMB CONTACT PLATE

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

CHIME ASSEMBLY

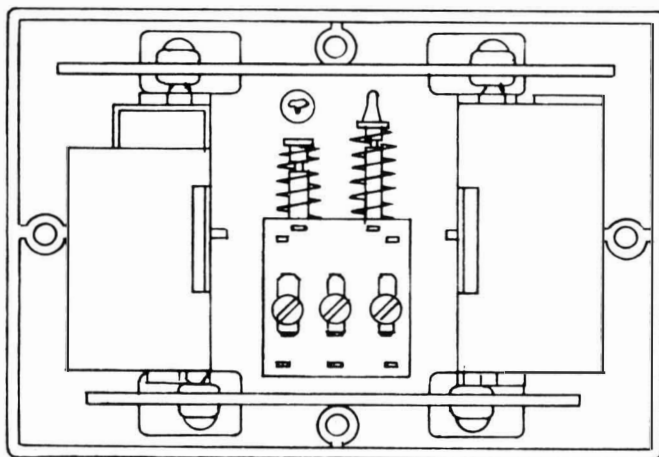

CHIME #5635


(ELECTRIC EYE RELAY) SCORE BOARD

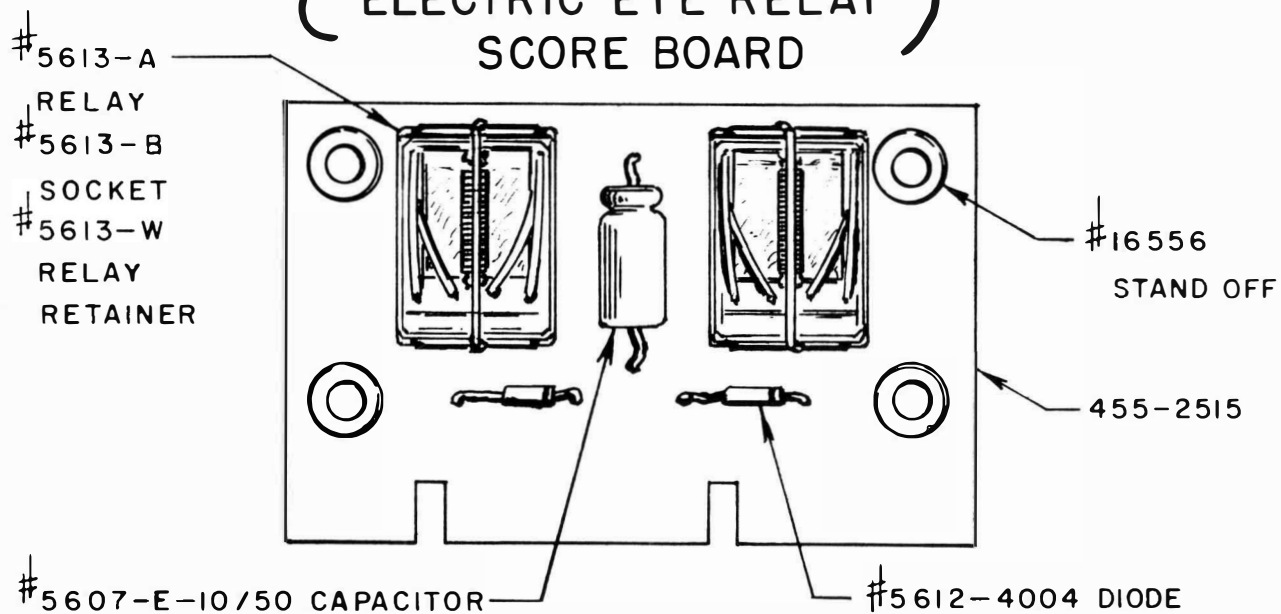

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


BONUS UNIT

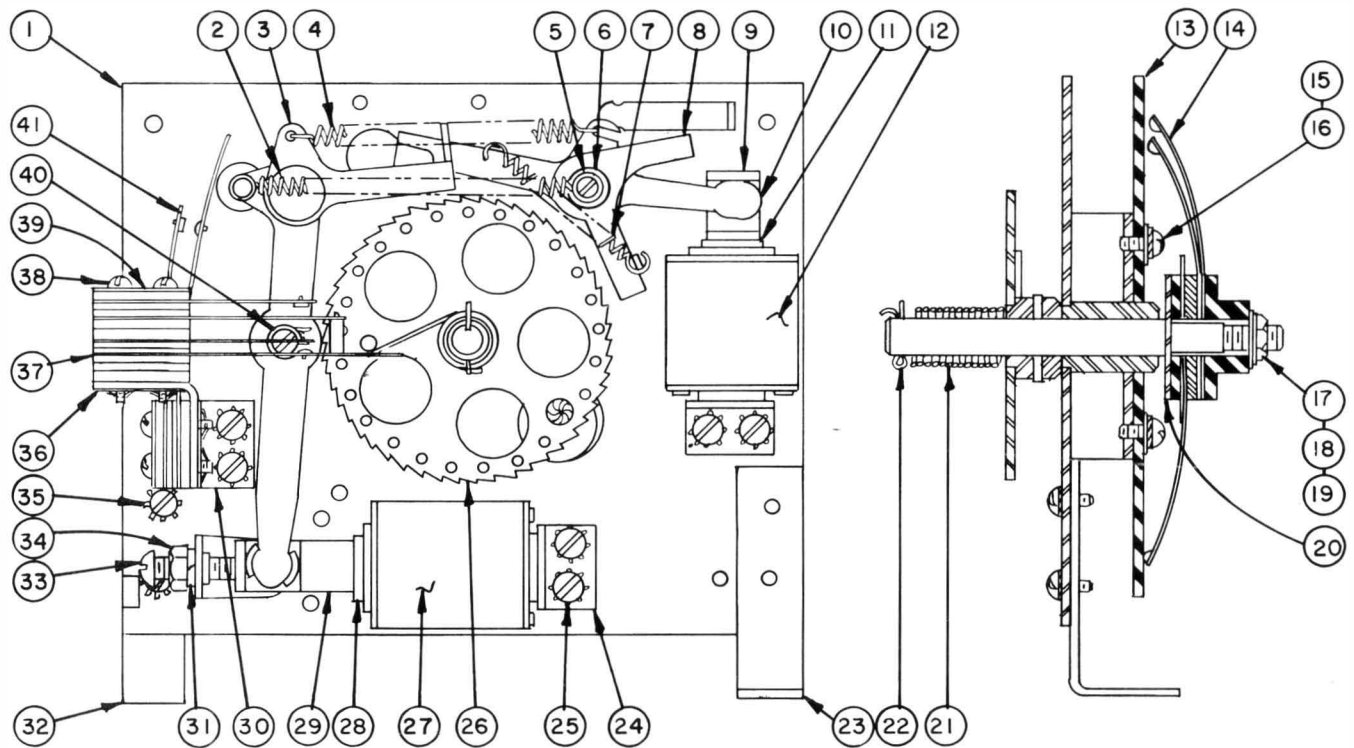

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2519-A	COMPLETE BONUS UNIT (20 STEPS)	21	130-905	TORSION SPRING
1	130-2502	MOUNTING PLATE ASS'Y	22	#6752-10	COTTER PIN
2	130-910-18	SPRING	23	130-560-AS	MOUNTING LEG
3	130-2511	OPERATING ARM ASS'Y	24	130-2516	PLUNGER STOP ASS'Y
4	130-901	SPRING	25		#6-32 x 1/4 LG. SEMS UNIT
5	130-1510	RESET ARM POST	26	130-2542-20	RATCHET & POST ASS'Y
6	130-1517	RESET ARM BUSHING	27	J-22-550	STEP-UP COIL
7	129-900	SPRING	28	130-1535	STEP-UP SOLENOID TUBING
8	130-2514	ESCAPEMENT PAWL & BUSHING	29	91-1538	STEP-UP PLUNGER
9	91-1507	RESET PLUNGER	30	130-511	DOUBLE CONTACT BRKT.
10	130-2513	RESET ARM ASS'Y	31	#5428	LOCKWASHER
11	130-1536	RESET SOLENOID TUBING	32	130-560-A	MOUNTING LEG
12	H-26-500	RESET COIL	33		#10-32 x 3/4 LG. BRASS R.H.M.S.
13	373-2510-0	CONTACT PLATE ASS'Y	34		#10-32 HEX NUT
14	431-2501	WIPER FINGER ASS'Y	35		#8-32 x 1/4 LG. SEMS
15		#6-32 x 3/8 LG. SEMS UNIT	36	#6770	TINNERMAN NUT
16	#5305	FLAT WASHER	37	#120 & #80	CONTACT SWITCH ASS'Y
17		1/4-28 HEX NUT	38		#4 S.M.S. LENGTH AS REQUIRED
18	#5429	LOCKWASHER	39	#6771	TINNERMAN SPACER
19	#5331	PLAIN WASHER	40	130-1508	OPERATING ARM POST
20	130-518	FINGER BACK-UP WASHER	41	#108	SWITCH ASS'Y

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

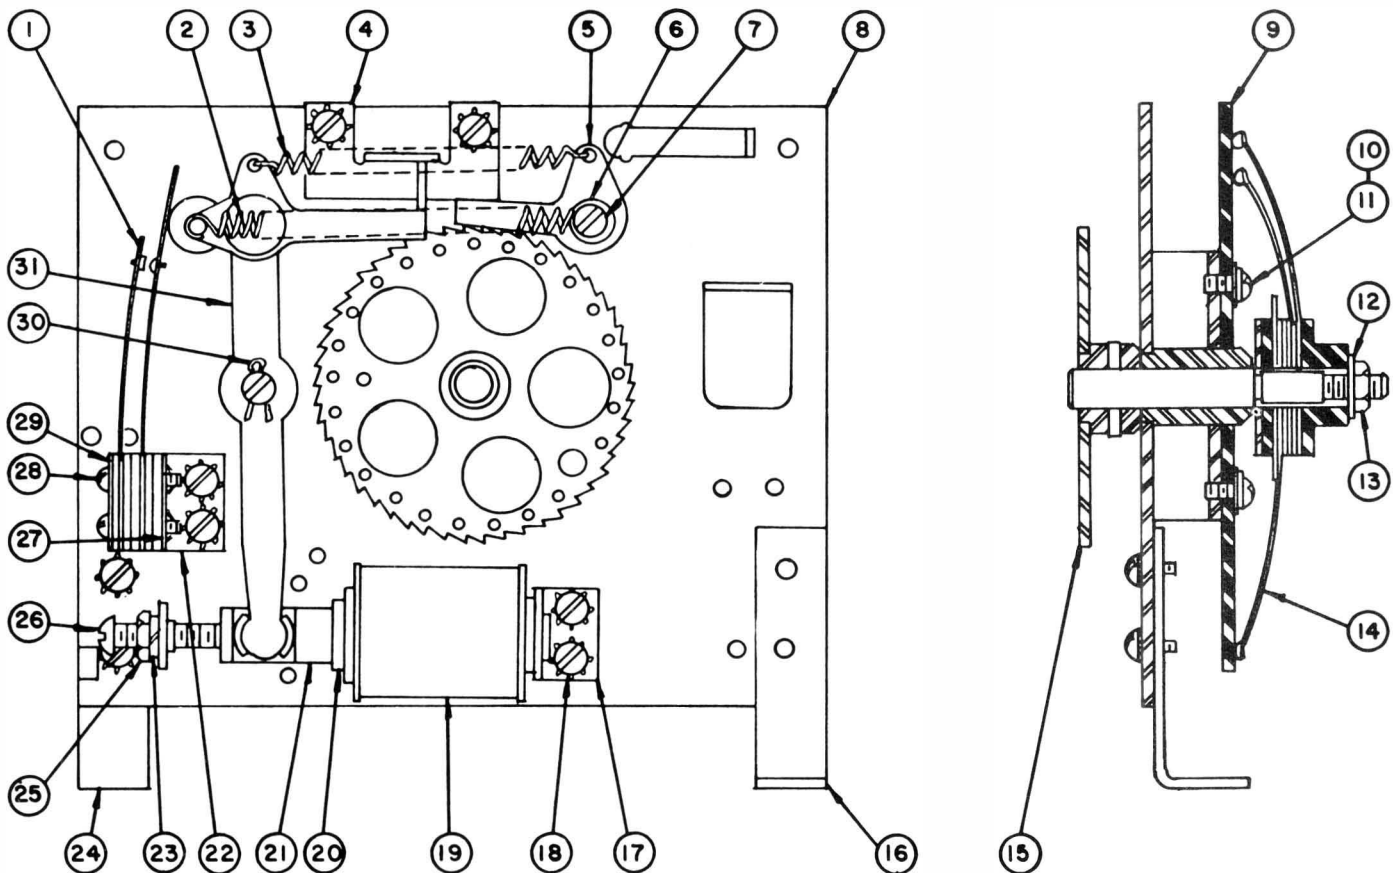

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2571-B	COMPLETE 00-90 UNIT	16	130-560-AS	MOUNTING LEG
1	#108	CONTACT SWITCH ASS'Y	17	130-2516	PLUNGER STOP ASS'Y
2	130-910-21	SPRING	18		#6-32 x 1/4 LG. SEMS UNIT
3	130-901	SPRING	19	J-23-700	COIL COMPLETE
4	130-531	OVER RIDE RESTRAINER	20	130-1535	SOLENOID TUBING
5	130-2517	HOLDING PAWL & BUSHING ASS'Y	21	91-1538	OPERATING PLUNGER
6	130-1517	RESET POST BUSHING	22	91-524	CONTACT BRACKET
7	130-1510	RESET PAWL POST	23	#5428	SPLIT TYPE LOCKWASHER
8	130-2505	MOUNTING PLATE, BRKT. & BUSHING ASS'Y	24	130-560-A	MOUNTING LEG
9	344-2515-J	CONTACT PLATE ASS'Y (00-90 UNIT)	25		#10-32 HEX NUT
10	#5305	FLAT WASHER	26		#10-32 x 3/4 LG. BRASS R.H.M.S.
11		#6-32 x 3/8 LG. SEMS UNIT	27	#6770	TINNERMAN NUT
12	#5429	SPLIT TYPE LOCKWASHER	28		#4 S.M.S. LENGTH AS REQUIRED
13		#1/4-28 HEX NUT	29	#6771	TINNERMAN SPACER
14	344-2506	WIPER FINGER ASS'Y (00-90 UNIT)	30	143-902	SPRING CLIP
15	130-2546	SHAFT, BUSHING & RATCHET ASS'Y	31	130-2511	OPERATING ARM ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

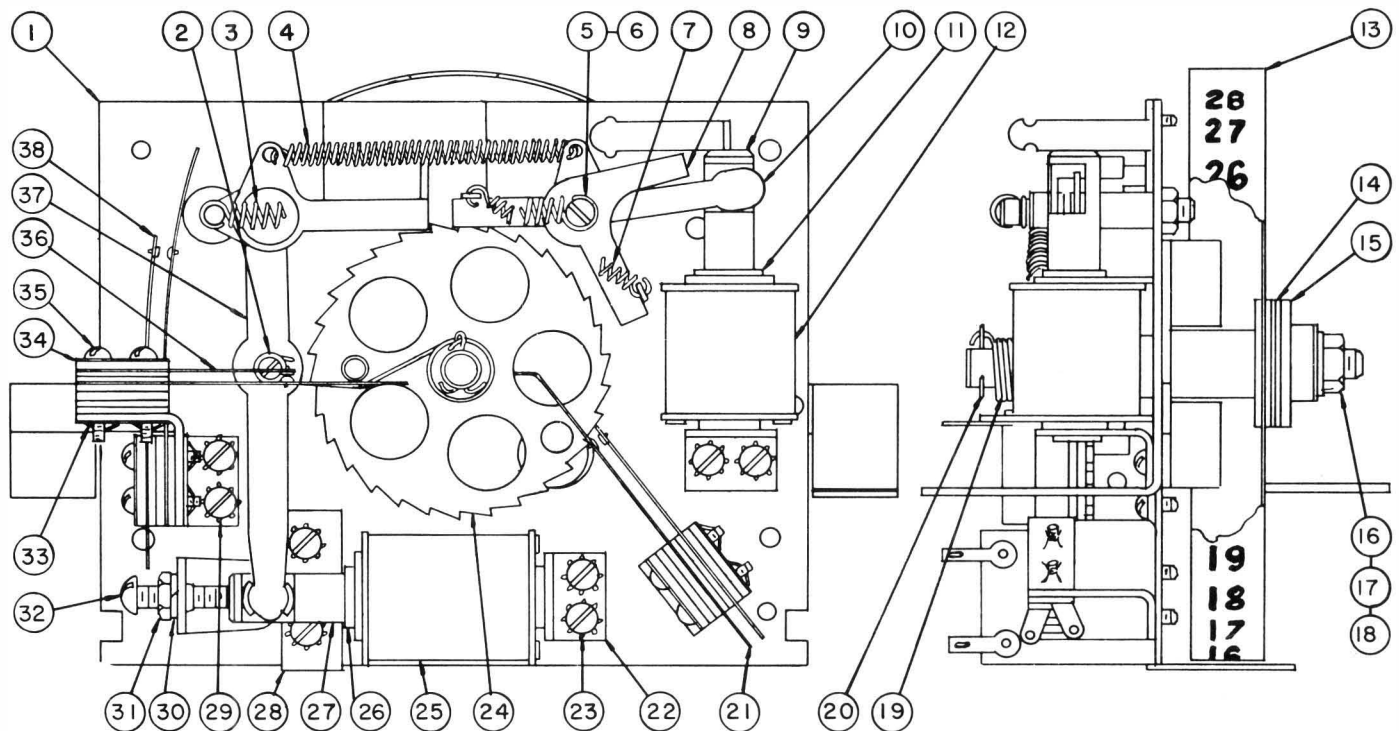


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2532-C	COMPLETE CREDIT UNIT	20	#6752-10	COTTER PIN
1	130-2583	MOUNTING PLATE ASS'Y	21	#46	SWITCH ASS'Y
2	130-1508	OPERATING ARM POST	22	130-2516	PLUNGER STOP ASS'Y
3	130-910-18	SPRING	23		#6-32 x 1/4 LG. SEMS UNIT
4	130-901	SPRING	24	130-2579	SHAFT, BUSHING, RATCHET & STUD ASS'Y
5	130-1510	RESET ARM POST	25	J-22-550	COIL (STEP-UP)
6	130-1517	RESET POST BUSHING	26	130-1535	STEP-UP SOLENOID TUBING
7	129-900	SPRING	27	130-1513	STEP-UP PLUNGER
8	130-2514	ESCAPEMENT PAWL & BUSHING	28	130-532	WINDOW BRACKET
9	130-1539	RESET PLUNGER	29	130-511	DOUBLE CONTACT BRACKET
10	130-2513	RESET ARM ASS'Y	30	#5428	LOCKWASHER
11	130-1536	RESET SOLENOID TUBING	31		#10-32 HEX NUT
12	H-26-650	COIL RESET	32		#10-32 x 3/4 LG. BRASS R.H.M.S.
13	130-2552	DRUM ASS'Y	33	#6770	TINNERMAN NUT
14	130-518	WASHER	34	#6771	TINNERMAN SPACER
15	130-806	FINGER HUB	35		#4 S.M.S. LENGTH AS REQUIRED
16		1/4-28 HEX NUT	36	#108	SWITCH ASS'Y
17	#5429	LOCKWASHER	37	130-2533	OPERATING ARM & POST ASS'Y
18	#5331	PLAIN WASHER	38	#108	SWITCH ASS'Y
19	130-907	TORSION SPRING			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

BALL COUNT UNIT

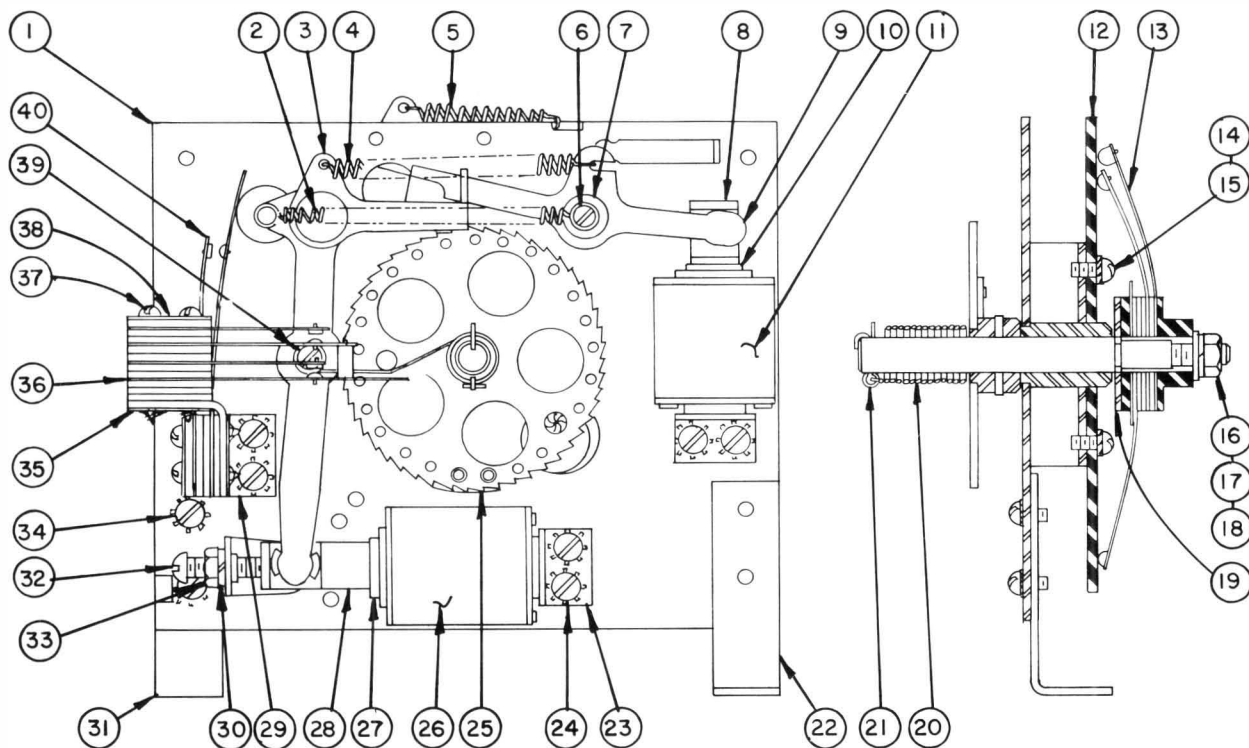


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2568-B	COMPLETE BALL COUNT UNIT (10 STEPS)	21	#6752-10	COTTER PIN
1	130-2502	MOUNTING PLATE ASS'Y	22	130-560-AS	MOUNTING LEG
2	130-910-18	SPRING	23	130-2516	PLUNGER STOP ASS'Y
3	130-2511	OPERATING ARM ASS'Y	24		#6-32 x 1/4 LG. SEMS UNIT
4	130-901	SPRING	25	130-2542-20	RATCHET & POST ASS'Y
5	130-904	SPRING	26	J-22-550	STEP-UP COIL
6	130-1510	RESET ARM POST	27	130-1535	STEP-UP SOLENOID TUBING
7	130-1517	RESET ARM BUSHING	28	91-1538	STEP-UP PLUNGER
8	91-1507	RESET PLUNGER	29	130-511	DOUBLE CONTACT BRKT.
9	130-2513	RESET ARM ASS'Y	30	#5428	LOCKWASHER
10	130-1536	RESET SOLENOID TUBING	31	130-560-A	MOUNTING LEG
11	H-26-500	RESET COIL	32		#10-32 x 3/4 LG. BRASS R.H.M.S.
12	455-2510	CONTACT PLATE ASS'Y	33		#10-32 HEX NUT
13	455-2513	WIPER FINGER ASS'Y	34		#8-32 x 1/4 LG. SEMS
14		#6-32 x 3/8 LG. SEMS UNIT	35	#6770	TINNERMAN NUT
15	#5305	FLAT WASHER	36	#128 & #80	CONTACT SWITCH ASS'Y
16		1/4-28 HEX NUT	37		#4 S.M.S. LENGTH AS REQUIRED
17	#5429	LOCKWASHER	38	#6771	TINNERMAN SPACER
18	#5331	PLAIN WASHER	39	130-1508	OPERATING ARM POST
19	130-518	FINGER BACK-UP WASHER	40	#108	SWITCH ASS'Y
20	130-905	TORSION SPRING			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

OPERATING RELAYS

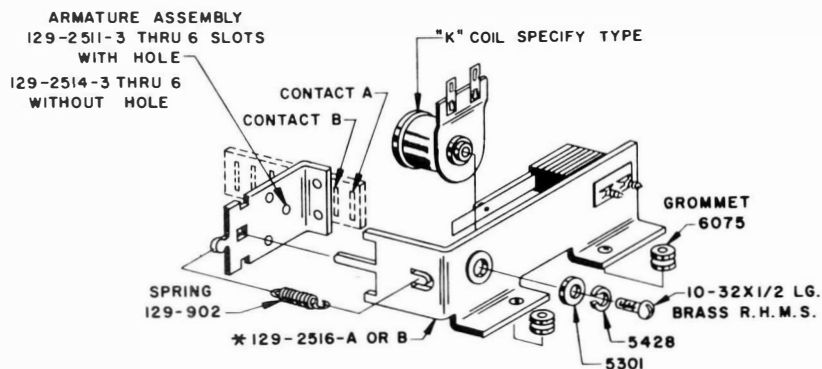

CONTACT SWITCH CODE
M-CONTACT OPEN WHEN COIL IS NOT ENERGIZED
B-CONTACT CLOSED WHEN COIL IS NOT ENERGIZED
T-TRIPLE CONTACT


* 129-2516-A FRAME ASSEMBLY WITH HOLES FOR GROMMETS
129-2516-B FRAME ASSEMBLY WITH HOLES FOR SCREWS

RELAY NAME	COIL NO.	129-2511-3 THRU 6 SLOTS		CONTACT SWITCHES					
		ARMATURE		A	B	C	O	E	F
ANTI-CHEAT RE.	K-28-1100	5 SLOTS		M-27	M-26	B-32	B-26	B-26	
BALL INOX RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26			
BONUS COLLECT RE.	K-28-1200	5 SLOTS		M-27	M-26	M-34	M-26	M-48	
CHANGE RE. -----	K-28-1200	4 SLOTS	-----	M-27	T-31	T-31	T-31		
COIN CONTROL RE.	K-29-1400	3 SLOTS		M-27	T-31				
COIN RE.	K-28-1200	5 SLOTS		M-27	M-26	M-34	M-26	M-26	
CREDIT RESET RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	T-31		
DOUBLE BONUS RE. -----	K-29-1400	3 SLOTS	-----	M-27	B-26				
EXTRA ADVANCE RE.	K-28-1200	3 SLOTS		M-27	M-26	M-26			
EXTRA BALL RE.	K-28-1200	3 SLOTS		M-27	M-26	B-26			
EXTRA LANE RE.	K-28-1200	3 SLOTS		M-27	M-26	T-31			
LOCK RE. -----	K-29-1600	4 SLOTS	-----	M-27	B-26	M-48	M-48		
OUT HOLE RE.	K-28-1100	5 SLOTS		M-27	T-31	B-32	M-26	T-31	
PLAYER CONTROL RE.	K-28-1200	5 SLOTS		T-31	T-31	T-31	T-31	T-31	
RESET RE.	K-29-1400	3 SLOTS		M-27	B-26				
RIGHT CHUTE RE. -----	K-28-1200	4 SLOTS	-----	M-27	M-26	B-26	T-31		
SPECIAL LANE RE.	K-28-1200	3 SLOTS		M-27	M-26	T-31			
START RE.	K-28-1100	6 SLOTS		M-27	T-31	M-34	M-24	T-31	B-48
TARGET RE.	K-28-1200	5 SLOTS		M-27	M-26	M-34	T-31	T-31	
TARGET RESET RE. -----	K-28-1100	5 SLOTS	-----	M-27	M-26	M-34	M-48	B-26	
TILT RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	B-48		
1st. PLAYER 100,000 RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	M-26		
2nd. PLAYER 100,000 RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	M-26		
3000 POINT RE.	K-28-1200	3 SLOTS		M-27	M-26	M-26			

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

OPERATING RELAYS

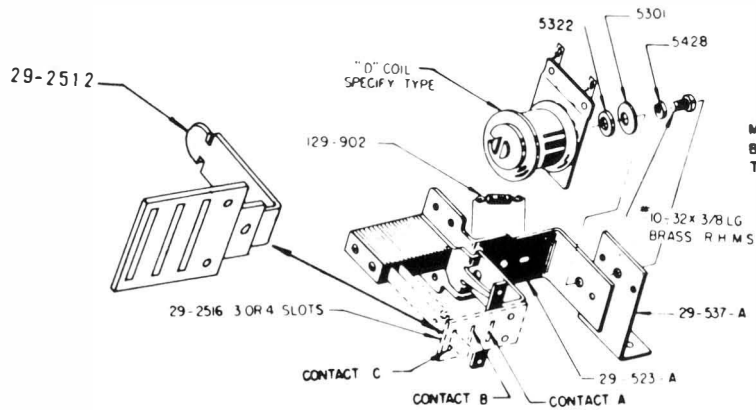

CONTACT SWITCH CODE
M-CONTACT OPEN WHEN COIL IS NOT ENERGIZED
B-CONTACT CLOSED WHEN COIL IS NOT ENERGIZED
T-TRIPLE CONTACT


RELAY NAME	COIL NO.	ARMATURE	
10-90 RE.	D-27-1000	29-2516-5	ALL CONTACT SWITCHES M-28
100-900 RE.	D-27-1000	29-2516-4	ALL CONTACT SWITCHES M-28
1000-9000 RE.	D-27-1000	29-2516-5	ALL CONTACT SWITCHES M-28
SCORE RESET RE.	D-27-1000	29-2512-3	ALL CONTACT SWITCHES M-27

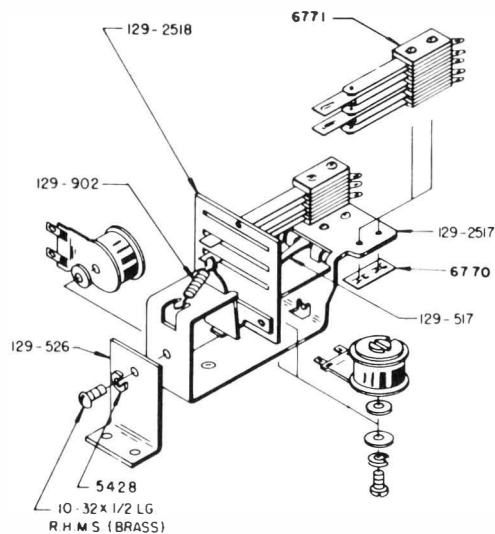

RELAY NAME	COIL NO.	ARMATURE	A	CONTACT SWITCHES				
				A-1	B	B-1	C	C-1
GAME OVER RE.	L-29-700	129-2518-3	M-357-A	M-357-A	B-357	B-357	T-356	B-357
2nd. COIN RE.	L-29-700	129-2518-2	M-357	M-357-A	T-356	T-356		

CHICAGO DYNAMIC INDUSTRIES
PARTS CATALOG

SCORING DRUM UNIT

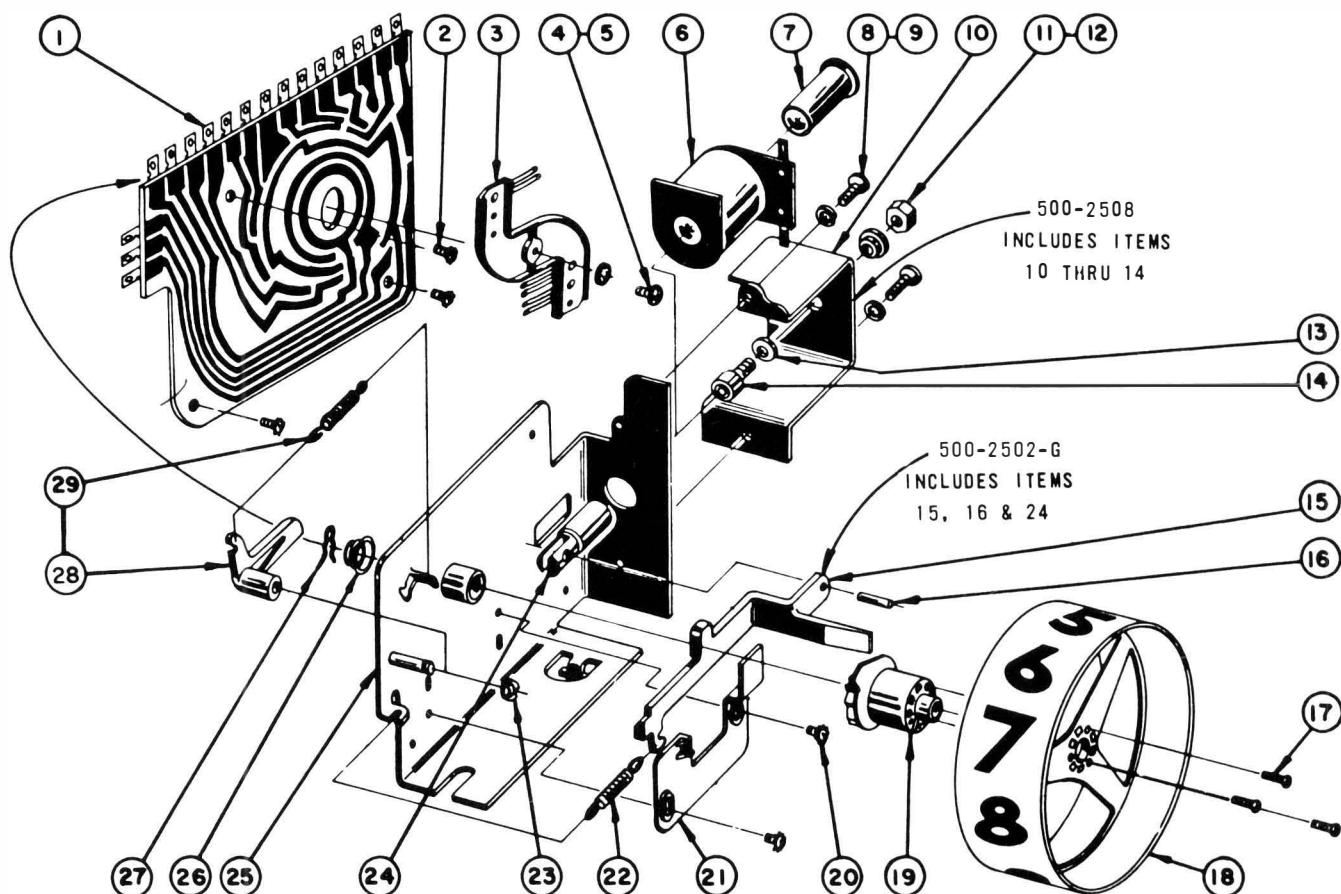


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	500-2566-F	10,000's SCORING DRUM UNIT WITH #260 N.O. END OF STROKE SWITCH) (2 REQ'D.)	12	500-1501	PLUNGER STOP BUSHING
	500-2566-0	ALL 0-9, 10-90 & 100-900 UNITS EXCEPT 1st. PLAYERS 10-90 (WITH #260 N.C. END OF STROKE SWITCH) (6-REQ'D.)	13	#5322	BRASS WASHER
1	500-2520	CONTACT PLATE ASS'Y	14	500-2507	PLUNGER STOP & SLUG ASS'Y
2		#6-32 x 1/4 LG. SEMS UNIT	15	500-802-A	OPERATING ARM
3	500-2521	WIPER FINGER ASS'Y	16	#6704-6	ROLL PIN
4		#6-32 x 3/8 LG. TYPE "F" PHILLIP HD. SELF TAPPING SCREW	17		#4 x 3/8 LG. TYPE "Z" PHILLIP HD. SELF TAPPING SCREW
5	#5476	SHAKEPROOF LOCKWASHER	18	500-800-WB	DRUM
6	N-24-700X	COIL COMPLETE	19	500-801	CAM & RATCHET
7	143-1516	BRASS TUBING	20		#6-32 x 3/16 LG. SEMS UNIT
8		#8-32 x 3/8 LG. TYPE "F" PHILLIP HD. SELF TAPPING SCREW	21	500-805	ADJUSTABLE STOP
9	#5427	SPLIT LOCKWASHER	22	300-901-A	SPRING
10	500-501	COIL MTG. BRACKET	23	#6722-18	E RING .187
11		#10-32 ELASTIC STOP NUT	24	300-1500-G	OPERATING PLUNGER
			25	500-2501-B	MOUNTING PLATE SUB ASS'Y
			26	300-903	SPRING
			27	300-902	RETAINING SPRING
			28	500-804	HOLDING PAWL
			29	130-904	SPRING

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG



SCORE MOTOR CAMS

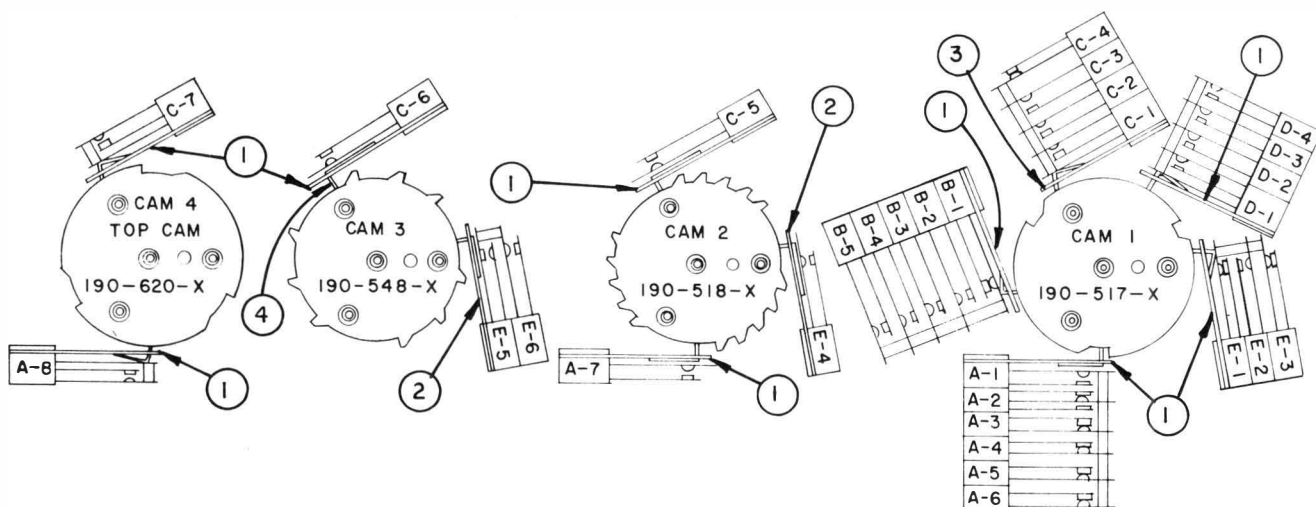

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	455-2509	SCORE MOTOR CAM ASS'Y	B-3	#57	SWITCH ASS'Y
	#5750-2333	SCORE MOTOR (60 Hz 22 R.P.M.)	B-4	#325	SWITCH ASS'Y
	#5750-2334	SCORE MOTOR (50 Hz 22 R.P.M.)	B-5	#325	SWITCH ASS'Y
1	115-501-F	CAM RIDER PLATE (9-REQ'0.)	C-1	#60	SWITCH ASS'Y
2	115-501-P	CAM RIDER PLATE (2-REQ'0.)	C-2	#64	SWITCH ASS'Y
3	115-501-A	CAM RIDER PLATE	C-3	#9-B	SWITCH ASS'Y
4	115-50B	CAM RIDER	C-4	#9-B	SWITCH ASS'Y
A-1	#63	SWITCH ASS'Y	C-5	#63	SWITCH ASS'Y
A-2	#234	SWITCH ASS'Y	C-6	#63	SWITCH ASS'Y
A-3	#57	SWITCH ASS'Y	C-7	#60	SWITCH ASS'Y
A-4	#57	SWITCH ASS'Y	D-1	#62	SWITCH ASS'Y
A-5	#57	SWITCH ASS'Y	D-2	#325	SWITCH ASS'Y
A-6	#57	SWITCH ASS'Y	D-3	#325	SWITCH ASS'Y
A-7	#63	SWITCH ASS'Y	D-4	#64	SWITCH ASS'Y
A-8	#60	SWITCH ASS'Y	E-1	#63	SWITCH ASS'Y
B-1	#17	SWITCH ASS'Y	E-2	#325	SWITCH ASS'Y
B-2	#325	SWITCH ASS'Y	E-3	#9	SWITCH ASS'Y

CHICAGO DYNAMIC INDUSTRIES
PARTS CATALOG

COIN DENOMINATION WINDOWS

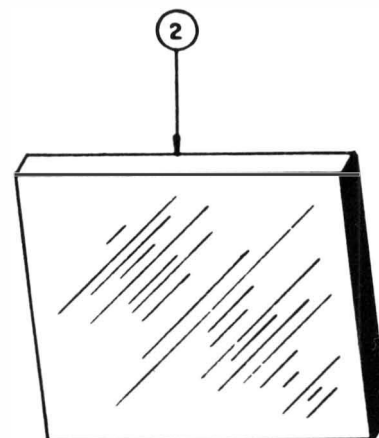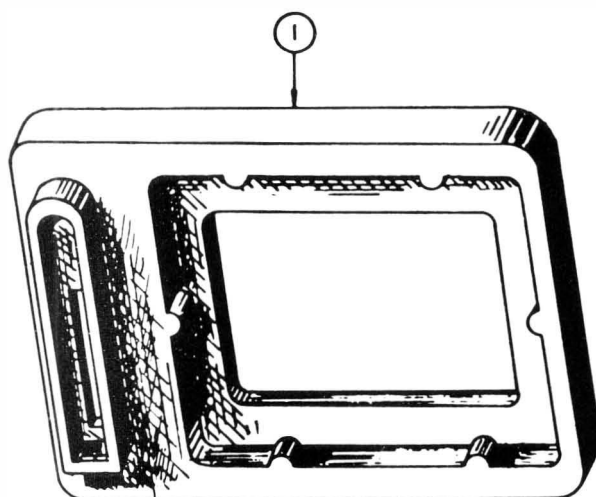

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	382-800-A	5c COIN ENTRY MOLDING	2	326-305-W	(1 DIME EACH PLAYER)
	382-800-B	10c COIN ENTRY MOLDING		326-305-X	(QUARTER)
	382-800-C	25c COIN ENTRY MOLDING		326-306-A	(2 x 10 PFENNING - 1 PLAY) (GERMAN)
	382-800-F	FOREIGN COIN ENTRY MOLDING (SPECIFY COIN OPENING)		326-306-B	(50 PFENNING - 3 PLAYS) (GERMAN)
2	326-305-A	COIN DENOMINATION WINDOWS (2 NICKELS - 1 PLAY)		326-306-C	(1 D.M. - 6 PLAYS) (GERMAN)
	326-305-B	(10c - 1 PLAY)		326-306-D	(50 PFENNING - 1 PLAY) (GERMAN)
	326-305-C	(25c - 3 PLAYS)		326-306-E	(50 PFENNING - 2 PLAYS) (GERMAN)
	326-305-D	(5c - 1 PLAY)		326-306-F	(1 D.M. - 4 PLAYS) (GERMAN)
	326-305-E	(25c - 5 PLAYS)		326-306-G	(1 D.M. - 5 PLAYS) (GERMAN)
	326-305-F	(25c - 6 PLAYS)		326-306-H	(2 D.M. - 10 PLAYS) (GERMAN)
	326-305-G	(10c - 2 PLAYS)		326-306-I	(2 D.M. - 11 PLAYS) (GERMAN)
	326-305-H	(3 NICKELS - 1 PLAY)		326-306-J	(2 D.M. - 12 PLAYS) (GERMAN)
	326-305-J	(1 DIME & 1 NICKEL - 1 PLAY)		326-306-K	(1 D.M. - 2 PLAYS) (GERMAN)
	326-305-K	(1 QUARTER - 2 PLAYS)		326-306-L	(1 D.M. - 1 PLAY) (GERMAN)
	326-305-L	(25c - 2 PLAYERS)		326-306-M	(2 D.M. - 5 PLAYS) (GERMAN)
	326-305-M	(2 DIMES - 2 PLAYERS)		326-306-N	(1 D.M. - 2 PLAYER) (GERMAN)
	326-305-O	(10c - 1 PERIOD)		326-306-O	(2 D.M. - 4 PLAYER) (GERMAN)
	326-305-P	(25c - 3 PERIODS)		326-306-P	(50 PFENNING) (GERMAN)
	326-305-Q	(25c - 1 PLAY)		326-306-Q	(1 D.M.) (GERMAN)
	326-305-R	(25c)		326-306-R	(2 D.M.) (GERMAN)
	326-305-S	(25c - 4 PLAYS)		326-307-A	(50 LIRE - 1 PLAY) (ITALY)
	326-305-T	(1 QUARTER - 1 PLAY)		326-307-B	(100 LIRE - 2 PLAYS) (ITALY)
	326-305-U	(A GAME OF SKILL)		326-307-C	(100 LIRE - 1 PLAY) (ITALY)
	326-305-V	(1 QUARTER EACH PLAYER)		326-307-D	(100 LIRE - 3 PLAYS) (ITALY)
				326-307-E	(100 LIRE - 2 PLAYS) (ITALY)
				326-308-A	(2 x 25 ORE - 1 PLAY) (SWEDISH OR DENMARK)

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

COIN DENOMINATION WINDOWS


<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
326-306-B	(1 KRONE - 3 PLAYS) (SWEDISH OR DENMARK)	326-311-G	(20 CENTS - 1 PLAY) (BRITISH)
326-306-C	(50 ORE - 1 PLAY) (SWEDISH OR DENMARK)	326-311-H	(5d - 1 PLAY) (BRITISH)
326-308-D	(1 KRONE - 2 PLAYERS) (DENMARK)	326-311-I	(5d - 2 PLAYERS) (BRITISH)
326-309-A	(2 X 10 YEN - 1 PLAY) (JAPANESE)	326-311-J	(10 PENCE - 4 PLAYERS) (BRITISH)
326-309-B	(50 YEN - 3 PLAYS) (JAPANESE)	326-311-K	(TWO SHILLINGS - 5 PLAYS) (BRITISH)
326-309-C	(50 YEN - 1 PLAY) (JAPANESE)	326-312-A	(1 DINAR - 2 PLAYS) (YUGOSLAVIA)
326-309-D	(100 YEN - 3 PLAYS) (JAPANESE)	326-312-B	(50 PARA - 1 PLAY) (YUGOSLAVIA)
326-309-E	(3 X 10 YEN - 1 PLAY) (JAPANESE)	326-312-C	(1 DINAR - 1 PLAY) (YUGOSLAVIA)
326-309-F	(50 YEN - 2 PLAYS) (JAPANESE)	326-313-A	(1 SPEL - 25¢) (HOLLAND)
326-310-A	(1/2 FRANC - 1 PLAY) (FRENCH)	326-313-B	(1 GULDEN) (4 SPELEN) (HOLLAND)
326-310-B	(1 FRANC - 3 PLAYS) (FRENCH)	326-313-C	(1 GULDEN - 2 SPELER) (HOLLAND)
326-310-C	(1 FRANC - 4 PLAYS) (FRENCH)	326-314-A	(2 X 1 SCHILLING - 1 PLAY) (AUSTRIA)
326-310-D	(1 FRANC - 1 PLAY) (FRENCH)	326-314-B	(5 SCHILLINGS - 3 PLAYS) (AUSTRIA)
326-310-E	(2-20 CENTIMES - 1 PLAY) (FRENCH)	326-315-A	(1 KRONA - 1 PLAY) (SWEDEN)
326-310-F	(100 FRANC - 1 PLAY) (FRENCH)	326-315-B	(1 KRONA - 2 PLAYERS) (SWEDISH)
326-310-G	(50 CENTIMES - 1 PLAY) (FRENCH)	326-316-A	(1 MARKKA - 1 PLAY) (FINLAND)
326-310-H	(1 FRANC - 2 PLAYS) (FRENCH)	326-317-A	(1 ESCUDO - 1 PLAY) (PORTUGAL)
326-310-I	(5 FRANCS - 1 PLAY) (FRENCH)	326-317-B	(5 ESCUDOS - 2 PLAYERS) (PORTUGAL)
326-310-J	(50 CENTIMES - 2 PLAYS) (FRENCH)	326-318-A	(25 PIASTRES - 1 PLAY) (LEBANON)
326-310-K	(1 FRANC - 5 PLAYS) (FRENCH)	326-318-B	(50 PIASTRES - 2 PLAYS) (LEBANON)
326-310-L	(10 FRANCS - 2 PLAYS) (FRENCH)	326-319-A	(25 CENTIMES - 1 PLAY) (VENEZUELA)
326-310-M	(2 X 1 FRANC - 1 PLAY) (FRENCH)	326-320-A	(1 PESO - UN JUEGO) (MEXICO)
326-310-N	(2 X 5 FRANCS - 1 PLAY) (FRENCH)	326-320-B	(2 X 1 PESO - UN JUEGO) (MEXICO)
326-310-O	(1 FRANC - 2 PLAYERS) (FRENCH)	326-321-A	(2 X 5 PESETAS - 2 PLAYERS) (SPAIN)
326-311-A	(6d - 1 PLAY) (BRITISH)	382-301-A	(1 QUARTER - 2 PLAYS)
326-311-B	(ONE SHILLING - 1 PLAY) (BRITISH)	382-301-B	(1 QUARTER - 3 PLAYS)
326-311-C	(TWO SHILLINGS - 2 PLAYS) (BRITISH)	382-301-C	(1 DIME & 1 NICKEL - 1 PLAY)
326-311-D	(TWO SHILLINGS - 4 PLAYS) (BRITISH)	382-301-D	(3 NICKELS - 1 PLAY)
326-311-E	(ONE SHILLING - 3 PLAYS) (BRITISH)	382-301-E	(10¢ - 1 PLAY)
326-311-F	(TWO SHILLINGS - 1 PLAY) (BRITISH)	382-301-F	(2 NICKELS - 1 PLAY)

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

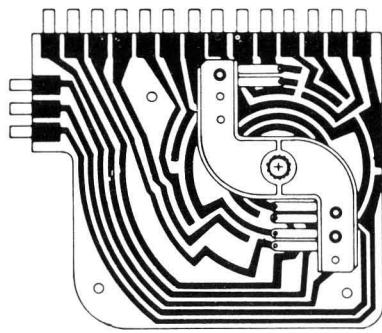


COUNTER SWITCH
PLATE 500-2520
FINGER 500-2519

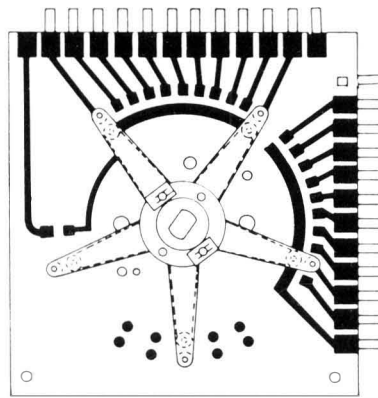

00-90 UNIT
PLATE 344-2515-J
FINGER 344-2506

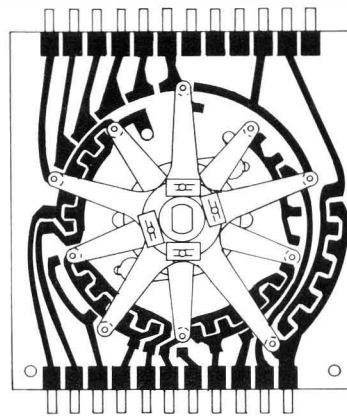


BALL COUNT UNIT
PLATE ASS'Y. 455-2510
FINGER ASS'Y. 455-2513

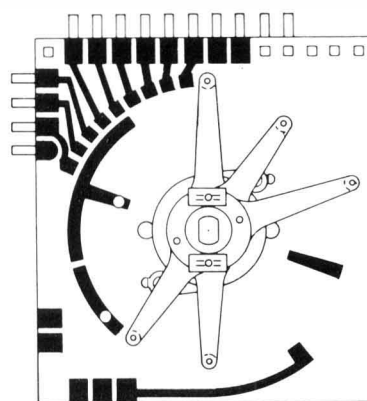

BONUS UNIT
PLATE 373-2510-D
FINGER 431-2501

TRANSFORMER # 5666-2518

FOR 115 VOLT
50/60 HZ INPUT




CONNECT #1 & #3 TOGETHER
CONNECT 2 & 5 TOGETHER

YELLOW = #1
BLACK = #2

DO NOT USE #4 OR #5 FOR 115 VOLT OPERATION

FOR 220-230-245 VOLT
50/60 HZ INPUT



CONNECT #2 & #3 TOGETHER

YELLOW = #1
BLACK TO #4 = 220 V.
BLACK TO #5 = 230 V.
BLACK TO #6 = 245 V.



CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

ROLL OVER BUTTON & TARGET SWITCH ASSEMBLY

408-2502

COMPLETE (INCLUDES 5 ITEMS UNDER LINED)

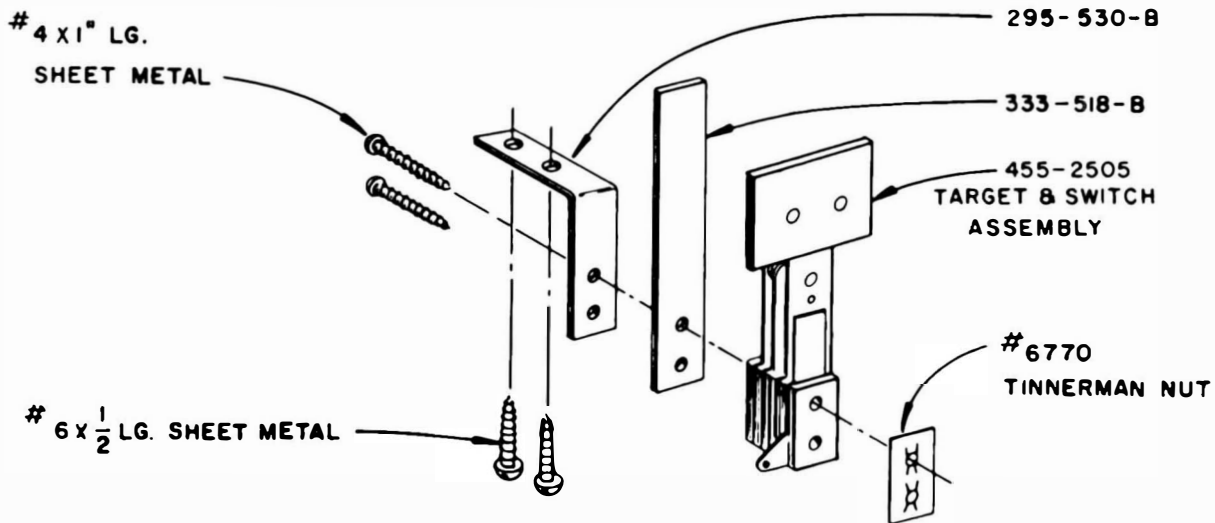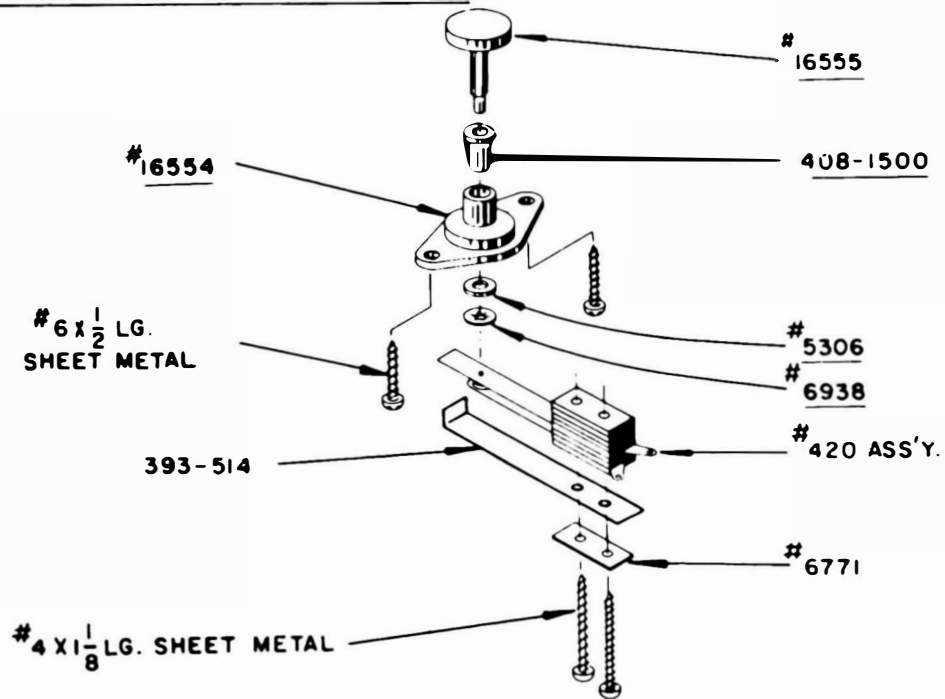

**CHICAGO
GOIN**

TOP TEN