

CHICAGO

GOIN

CINEMA

(MODEL 465)

PARTS CATALOG

CHICAGO DYNAMIC INDUSTRIES, INC.

A N A S T A S I O 2 0 0 2

1725 DIVERSEY BOULEVARD




CHICAGO, ILLINOIS 60614



PHONE (312) 935-4600

CASH COMPARTMENT

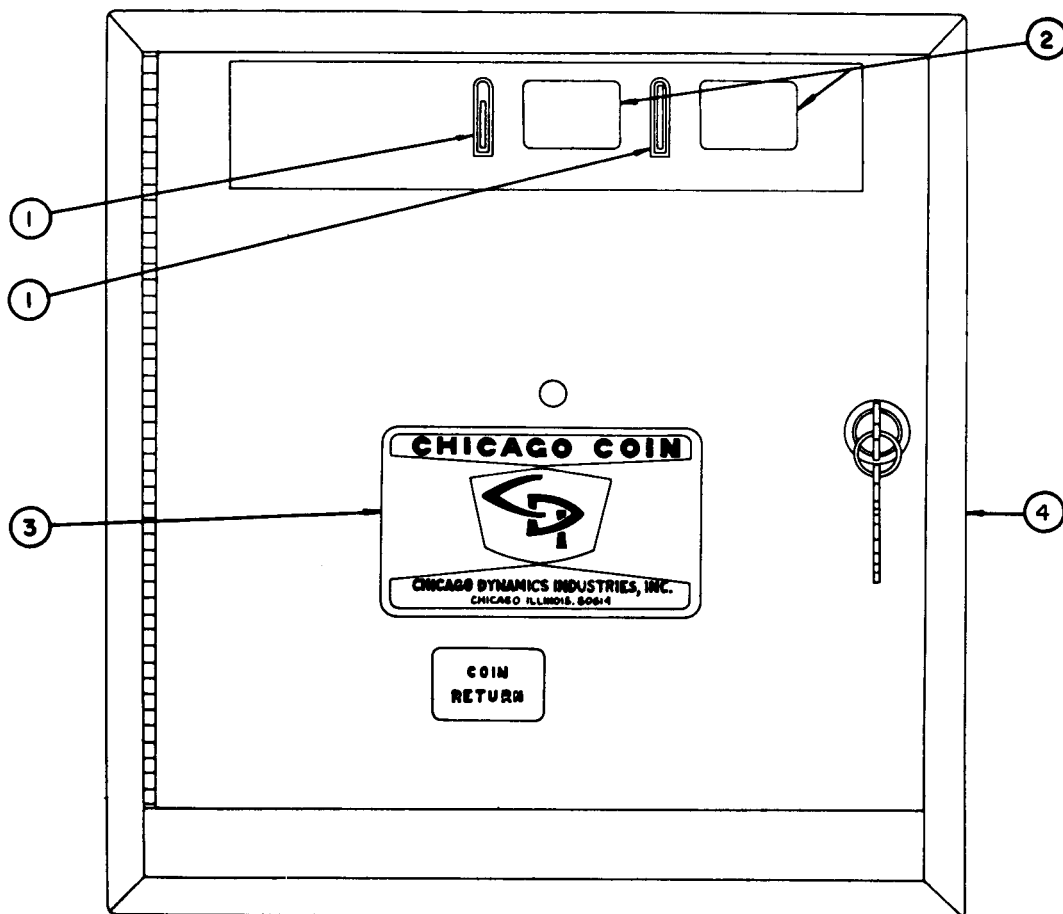


ITEM	PART NO.	DESCRIPTION
1	382-800	COIN ENTRY MOLDING (SEE PAGE 32)
2		COIN DENOMINATION WINDOWS (SEE BACK INSIDE COVER)
3	#6883	C.D.I. DECAL
4	3 84-2502	FRONT DOOR FRAME ASS'Y.

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

CASH COMPARTMENT DOOR

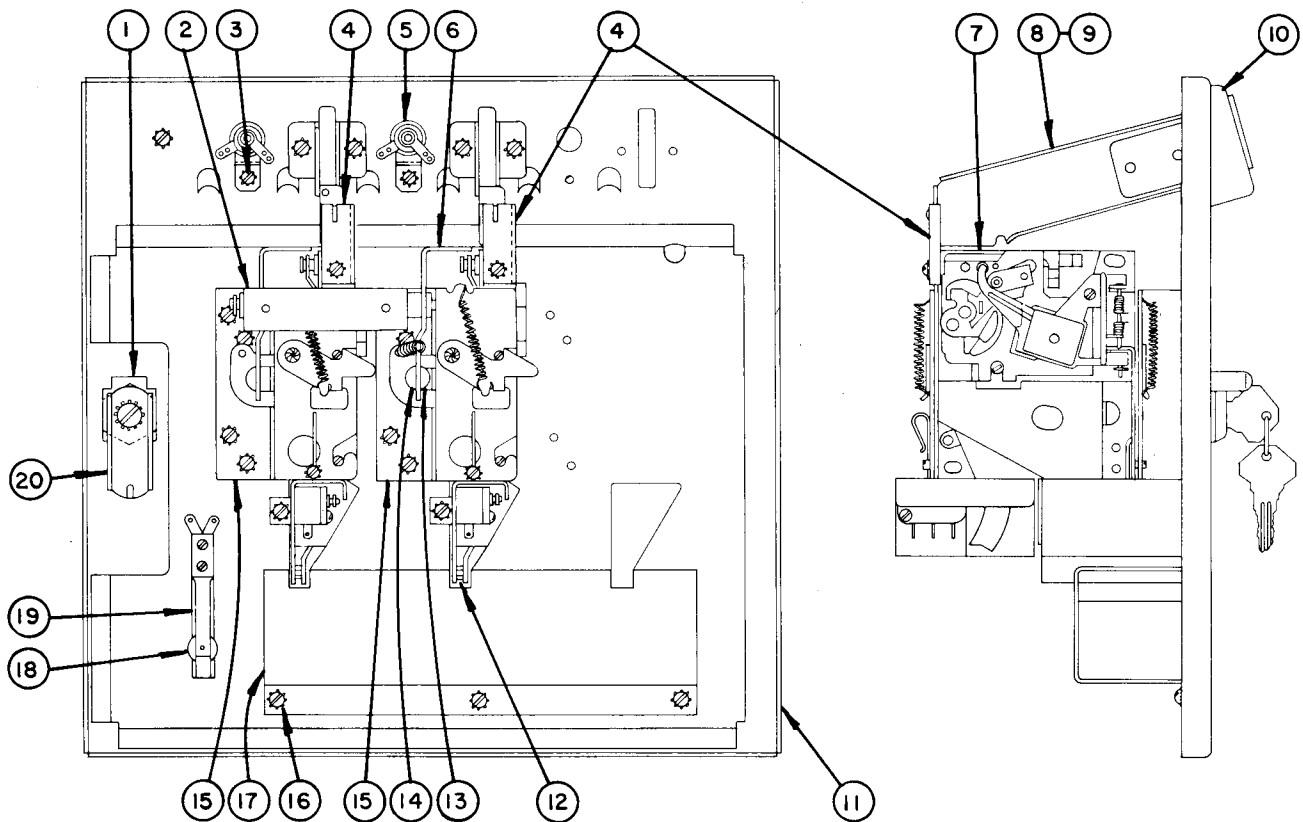


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	382-2520-B-C	COMPLETE FRONT ASS'Y	11	382-2507	FRONT DOOR & REINFORCEMENT ASS'Y
1	246-551	LOCK PLATE	12	333-2528	REJECTED COIN CONCUR FUNNEL ASS'Y
2	326-521	REJECTOR BRACKET	13	326-1505	REJECTOR ROD
3		#6-32 x 1/4" LG. SEMS UNIT	14	#6828-37	RETAINING RING
4	248-510	CENTERING BRACKET	15	333-2530-S	HOUSING, MICRO SWITCH & COIN LOCK
5	#5266	BAYONET SOCKET			OUT COIL ASS'Y (248-301 COIL)
	#5212	BULB		326-2522	HOUSING SHELL ASSEMBLY (326-2522-S
6	326-2510	REJECTOR ARM & BUSHING ASS'Y			WITH COIN LOCK OUT COIL MOUNTED)
	#5303	WASHER		248-300	MICRO SWITCH (SPECIFY COIN
	#6722-18	RETAINING RING			DENOMINATION FOR PROPER MICRO SW.)
7	#6801	COIN ACCEPTOR INSERT (SPECIFY	16		#8-32 x 1/4" LG. SEMS UNIT
		COIN DENOMINATION)	17	326-2527	COIN RETURN HOUSING ASS'Y
8	382-2501	COIN GUIDE ASSEMBLY	18	#220	SWITCH ASS'Y
9	382-2502	COIN GUIDE COVER ASS'Y	19	326-544-A	ANTI-GROUNDING FINGER
	382-2502-A	COIN GUIDE COVER ASS'Y FOR 25¢	20	460-505	LOCK CAM
		COIN ACCEPTOR ONLY		#6720	LOCK
10	382-2504-B-C	COIN WINDOW BRACKET ASS'Y			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

FRONT MOLDING & SHOOTER ASSEMBLY

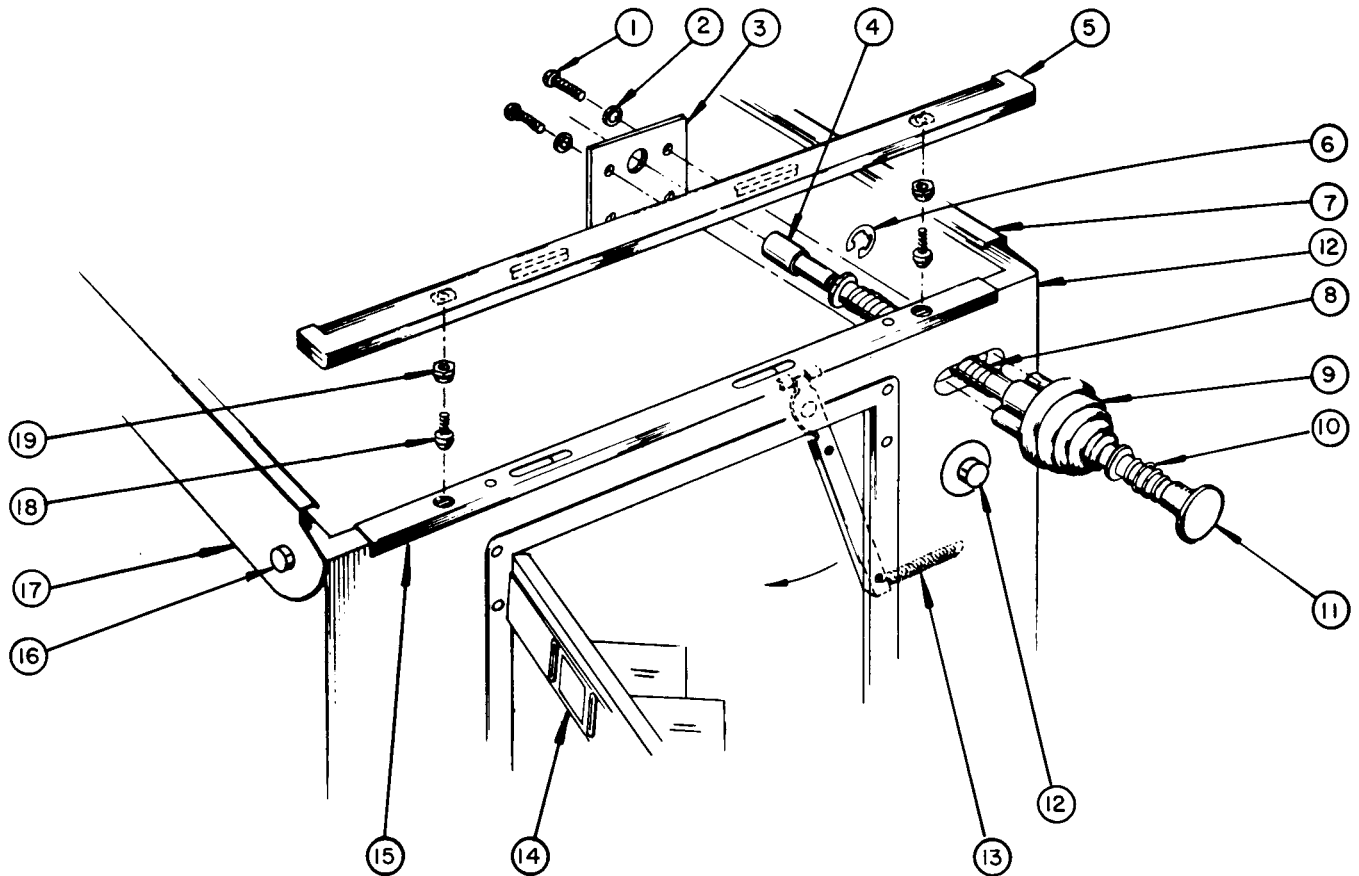


ITEM	PART NO.	DESCRIPTION
1		#10-32 x 1-1/8 LG. R.H.M.S.
2	#5478	EXTERNAL SHAKEPROOF LOCKWASHER
3	308-500	PLUNGER BUSHING MTG. BRKT.
4	#6086	PLUNGER TIP
5	339-2516	FRONT MOLDING ASS'Y
6	#6722-37	RETAINING RING
7	326-539-R	GLASS CHANNEL COVER
8	295-903	SHOOTER TENSION SPRING
9	#16519-W	BALL SHOOTER HOUSING
10	295-902	SHOOTER CHECK SPRING
11	439-2508	SHOOTER ROD ASS'Y
12		CREDIT & FLIPPER BUTTON (SEE PAGE 31)
13	250-900	RETRACTION SPRING
14		CASH COMPARTMENT DOOR (SEE PAGES 4 & 5)
15	393-2503	FRONT MOLDING LOCK ASS'Y
16		LEFT FLIPPER BUTTON (SEE PAGE 31)
17	326-539-L	GLASS CHANNEL COVER
18	326-1500	FRONT MOLDING ADJUSTING SCREW
19	326-1501	FRONT MOLDING LOCK NUT

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

BALL EJECTOR UNIT

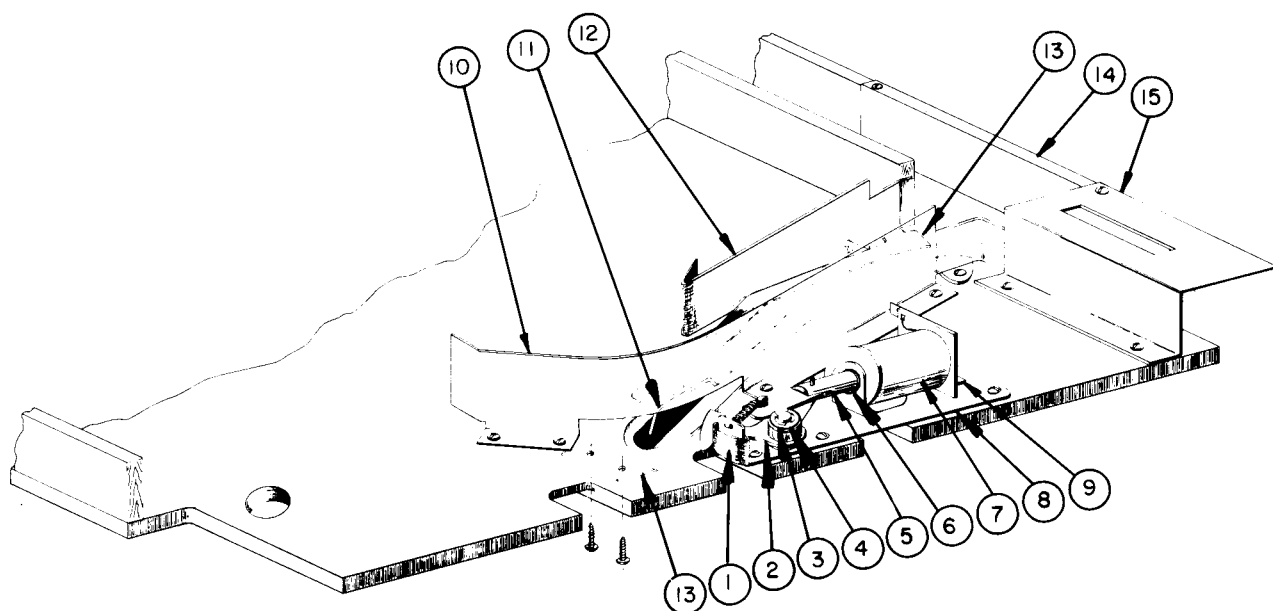

<u>ITEM</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
	366-2505-AG	COMPLETE BALL EJECTOR ASS'Y (CONTAINS ITEMS 1 THRU 9)
1	326-302	PLASTIC SLEEVE
2	366-2504	BALL EJECTOR ARM ASS'Y
3	#5373	WASHER
4	#6722-25	RETAINING RING
5	366-2506-G	PLUNGER & LINK ASS'Y
6	130-1535	SOLENOID TUBING
7	J-22-550	COIL COMPLETE
8	326-2519	BALL EJECTOR MTG. PLATE ASS'Y
9	124-2500	PLUNGER STOP ASS'Y #10-32 x 1" LG. BRASS RD. HD. M.S. #10-32 HEX NUT
10	326-513	LOWER BALL RETURN GUIDE RAIL
11	326-904	BALL EJECTOR WIRE FORM
12	326-512	UPPER BALL RETURN GUIDE RAIL
13	326-508	BALL RETURN RUNWAY
14	326-528	STRIKE PLATE
15	460-507-S	SHOOTER INDICATOR

TOP OF PLAYFIELD

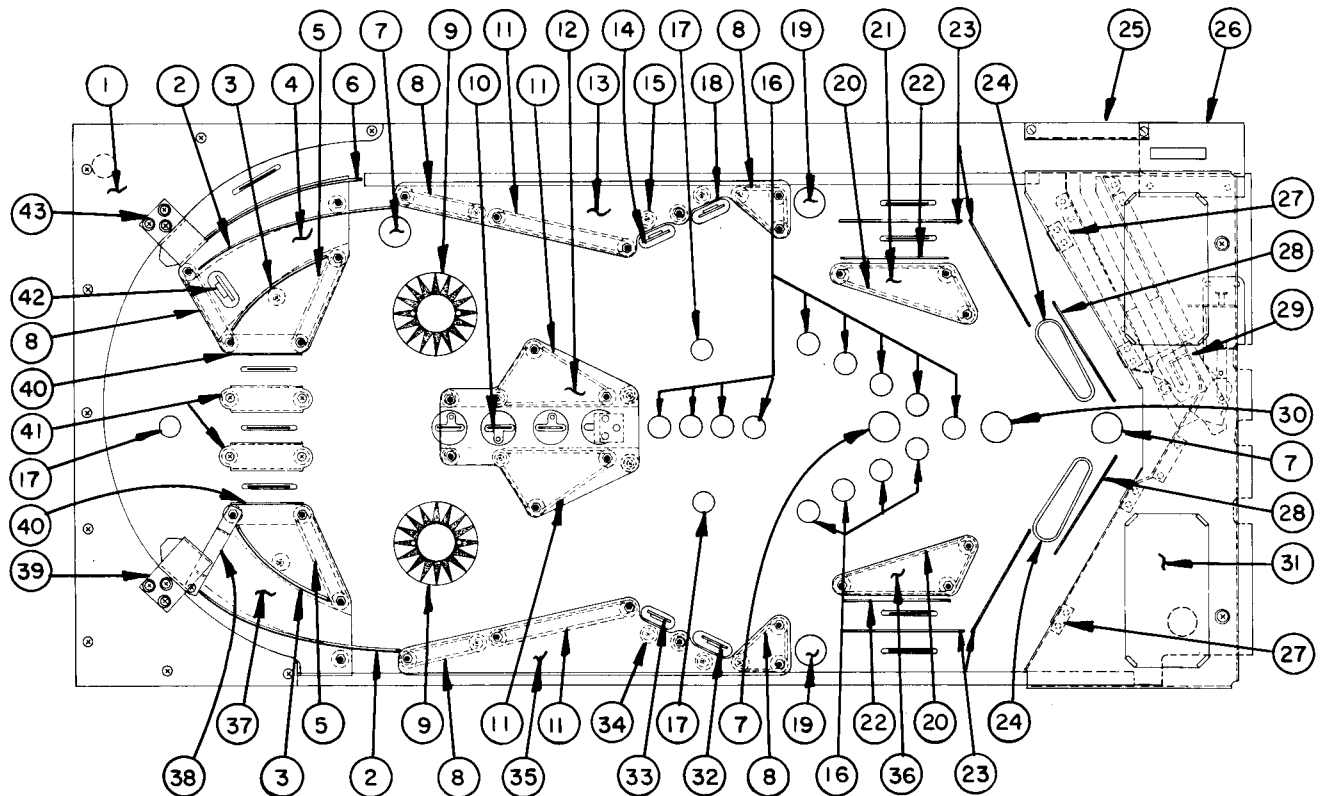


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	464-504-S	METAL ARCH TOP (SCREENED)	22	465-900-A	PLAYFIELD WIRE FORM
	295-514	METAL ARCH (BOTTOM)	23	465-900-B	PLAYFIELD WIRE FORM
	295-512	METAL ARCH SPACERS	24		FLIPPER ASS'Y (SEE PAGE 9)
2	460-901	PLAYFIELD WIRE FORM	25	326-528	STRIKE PLATE
3	464-900	PLAYFIELD WIRE FORM	26	460-507-S	SHOOTER INDICATOR (SCREENED)
4	464-300-F	PLAYFIELD LIGHT SHIELD (*)	27	439-502	INSTRUCTION PLATE RETAINER
5	#6063	2" DIA. RUBBER RING	28	431-900	PLAYFIELD WIRE FORM
6	393-902	BALL GATE WIRE FORM	29		BALL EJECTOR UNIT (SEE PAGE 7)
7	#16528-W	1" DIA. PANEL INSERT (WHITE)	30	#16528-Y	1" DIA. PANEL INSERT (YELLOW)
8	#6052	1-1/2" DIA. RUBBER	31	406-506-S	INSTRUCTION PLATE (SCREENED)
9	455-2518	THUMPER BUMPER ASS'Y (SEE PAGE 10)	32	464-2518-J	DROP TARGET ASS'Y (SEE PAGE 12)
10		BALL KICKER ASS'Y (SEE PAGE 13)	33	464-2518-I	DROP TARGET ASS'Y (SEE PAGE 12)
11	#6053	2-1/2" DIA. RUBBER RING	34	#6060	5/16" DIA. RUBBER RING
12	464-2501	LIGHT SHIELD & DEFLECTOR ASS'Y (*)	35	464-300-C	PLAYFIELD LIGHT SHIELD (*)
13	464-300-D	PLAYFIELD LIGHT SHIELD (*)	36	464-300-A	PLAYFIELD LIGHT SHIELD (*)
14	464-2518-K	DROP TARGET ASS'Y (SEE PAGE 12)	37	464-300-E	PLAYFIELD LIGHT SHIELD (*)
15	#16533-W	PLASTIC POST (WHITE) (35-REQ'D)	38	339-2502-R	LANE GATE & STOP BRACKET ASS'Y
	#16501-R	PLASTIC POST (RED) (17-REQ'D)		452-901	LANE GATE WIRE FORM
16	#16529-W	3/4" DIA. PANEL INSERT (WHITE)	39	231-2517-L	BALL GATE ASS'Y (LEFT)
17	408-2502	ROLL OVER BUTTON ASS'Y (SEE PAGE 15)	40	#16537-W	CUT GUIDE RAIL 2-1/2" LG. (WHITE)
18	464-2518-L	DROP TARGET ASS'Y (SEE PAGE 12)	41	#16502-R	TWO SIDED GUIDE RAIL 2-1/2" (RED)
19	#16528-R	1" DIA. PANEL INSERT (RED)	42	464-2508	TARGET & SWITCH ASS'Y (SEE BACK INSIDE COVER)
20	#6056	3" DIA. RUBBER RING	43	231-2517-R	BALL GATE ASS'Y (RIGHT)
21	464-300-B	PLAYFIELD LIGHT SHIELD (*)			

*MOUNTED WITH
326-1507-A ACETATE COVER MTG. POSTS &
#6-32 HEX NYLON CAP NUT

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

FLIPPER ASSEMBLY

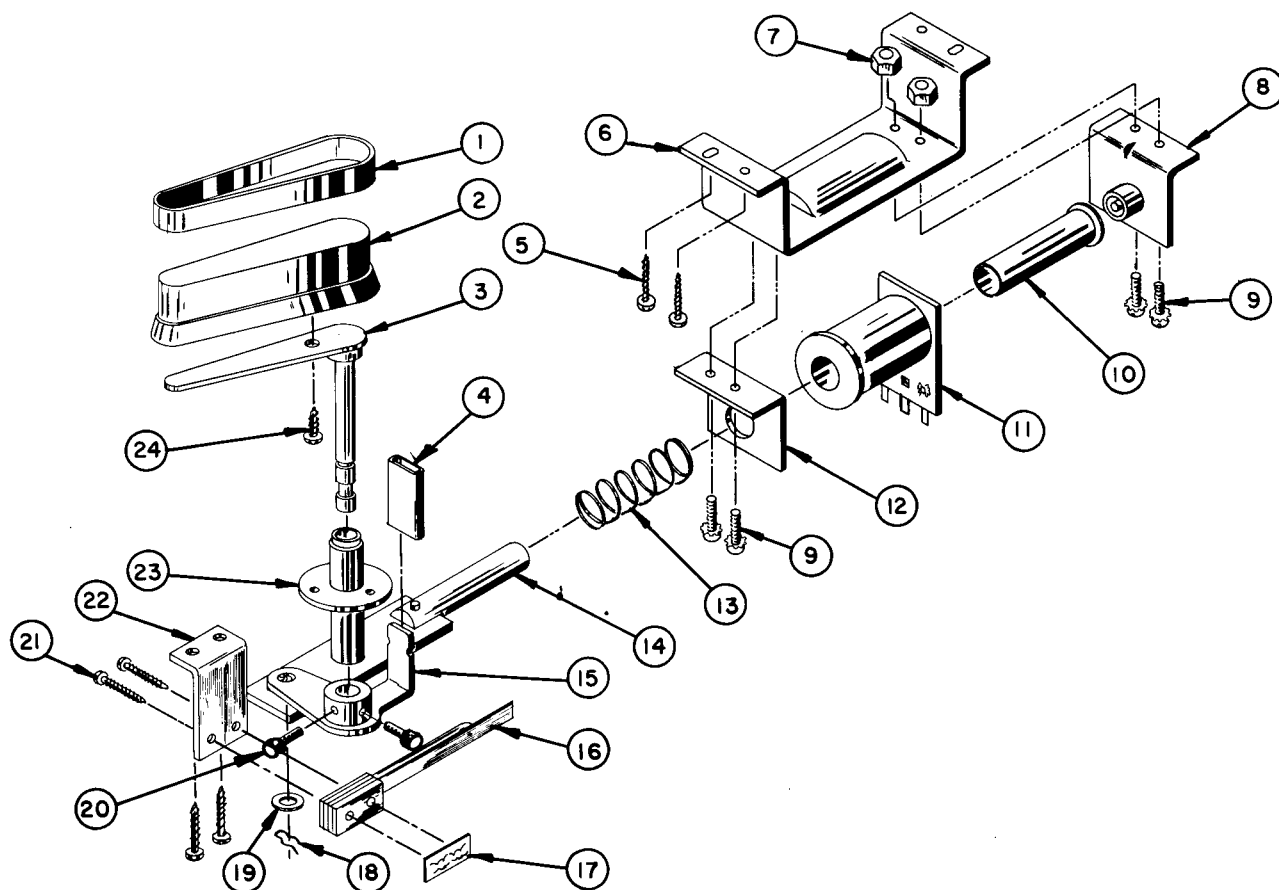

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	#6064	FLIPPER RUBBER RING	14	461-2501-G	FLIPPER PLUNGER & LINK ASS'Y
2	#16550	3" FLIPPER	15	231-2536-L	FLIPPER ARM ASS'Y (LEFT)
3	393-2501	FLIPPER PLATE & SHAFT ASS'Y		231-2536-R	FLIPPER ARM ASS'Y (RIGHT HAND SHOWN)
4	#6527	1" LG. PLASTIC SLEEVE	16	#294-BL	CONTACT SWITCH ASS'Y
5		#6 x 1/2 LG. TYPE "A" RD. HD. PHILLIPS S.M.S.		#294-BR	CONTACT SWITCH ASS'Y (SHOWN)
6	347-504	COIL MTG. BRACKET	17	#6770	TINNERMAN NUT
7		#6-32 HEX NUT	18	91-905	SPRING CLIP
8	347-2512	PLUNGER STOP ASS'Y	19	#5330	WASHER
9		#6-32 x 3/8 LG. SEMS UNIT	20		#10-32 x 1/2" LG. SOCKET HD. CAP SCREW
10	130-1535	SOLENOID TUBING	21		#4 S.M.S. (LENGTH AS REQUIRED)
11	J 29-400	COIL COMPLETE	22	295-559	CONTACT MTG. BRACKET
	21-375		23	#16508-W	FLIPPER BUSHING
12	347-505	COIL SUPPORT BRACKET	24		#6-32 x 1/2" LG. TYPE 23 PHILLIP TRUSS HD. SCREW
13	209-901	SPRING			

THUMPER BUMPER ASSEMBLY

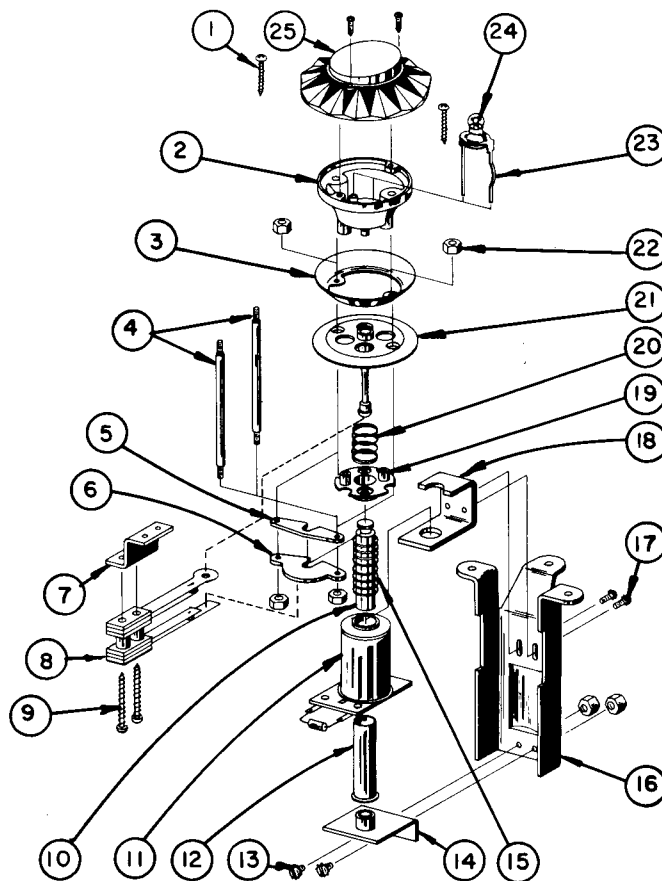


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	455-2518	COMPLETE THUMPER BUMPER ASS'Y	12	130-805	SOLENOID TUBING
1		#4 x 7/8 LG. RD. PHILLIP HD.	13		#6-32 x 3/8 LG. SEMS UNIT
		SHEET METAL SCREW	14	439-2510	PLUNGER STOP ASS'Y
2	#16511-W	THUMPER BODY	15	437-900	SPRING
3	312-504	THUMPER RING	16	393-508	COIL MTG. BRACKET
4	231-1507	POWER BUMPER RODS	17		#6-32 x 1/4 LG. SEMS UNIT
5	119-512	FIBER PLUNGER ARM	18	119-502	COIL SUPPORT BRACKET
6	119-503	BRASS PLUNGER ARM	19	#16512	BUMPER BASE
7	431-504	CONTACT MTG. BRACKET	20	3-119	SPRING
8	#433	SWITCH ASS'Y	21	#16513-Y	WAFER THUMPER
	#191-B	SWITCH ASS'Y	22		#6-32 ELASTIC STOP NUT
9		#4 S.M.S. (LENGTH AS REQUIRED)	23	#5234	SOCKET
10	119-1507	PLUNGER	24	#5112	#47 BULB
11	FJ-24-850	D.C. COIL COMPLETE	25	#16563-C	RED (100) DIAMOND SUNFLOWER CAP
	#5612-4004	DIODE			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

ACTION KICKER

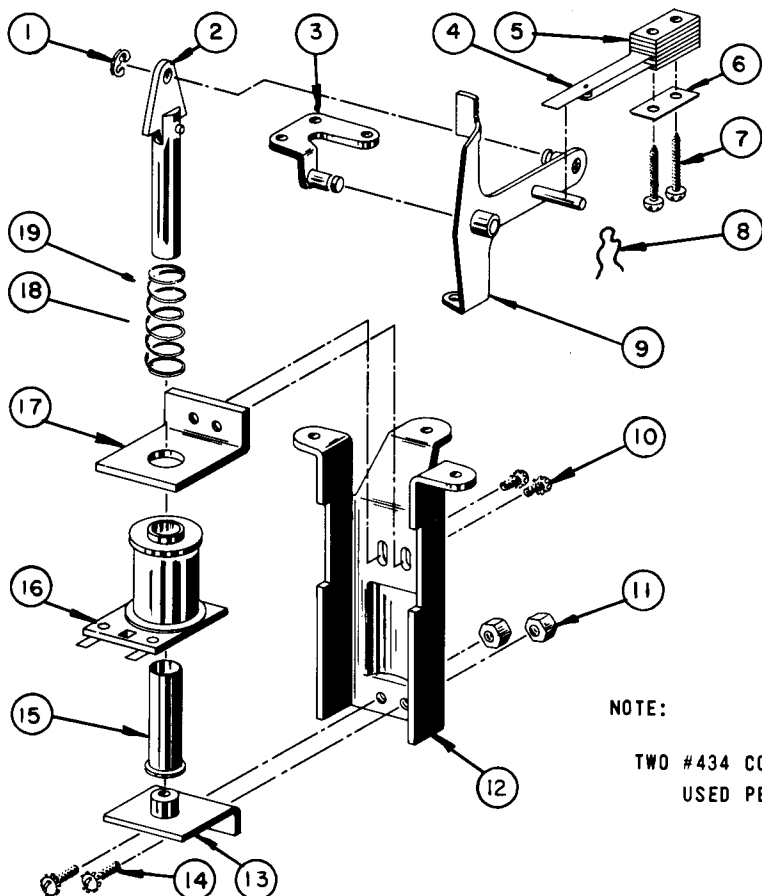


NOTE:

TWO #434 CONTACT SWITCHES
USED PER KICKER

ITEM	PART NO.	DESCRIPTION
1	#6722X21	RETAINING RING
2	295-2513	PLUNGER & LINK ASS'Y
3	295-2509	KICKER ARM BRACKET ASS'Y
4	#26	SWITCH ASS'Y
5	#43	SPACER BLOCK
6	#6771	TINNERMAN SPACER
7		#4 X 1" LG. S.M.S.
8	91-905	SPRING CLIP
9	331-2510	KICKER ARM ASS'Y (WITH POST)
10		#6-32 X 1/4" LG. SEMS UNIT
11		#6-32 HEX NUT
12	393-508	COIL MOUNTING BRACKET
13	439-2510	PLUNGER STOP ASS'Y
14		#6-32 X 3/8" LG. SEMS UNIT
15	130-805	SOLENOID TUBING
16	FJ-25-1050	D.C. COIL COMPLETE
	#5612-4004	DIODE
17	347-508	COIL SUPPORT BRACKET
18	209-901	SPRING
19	#5348	WASHER

DROP TARGET UNIT

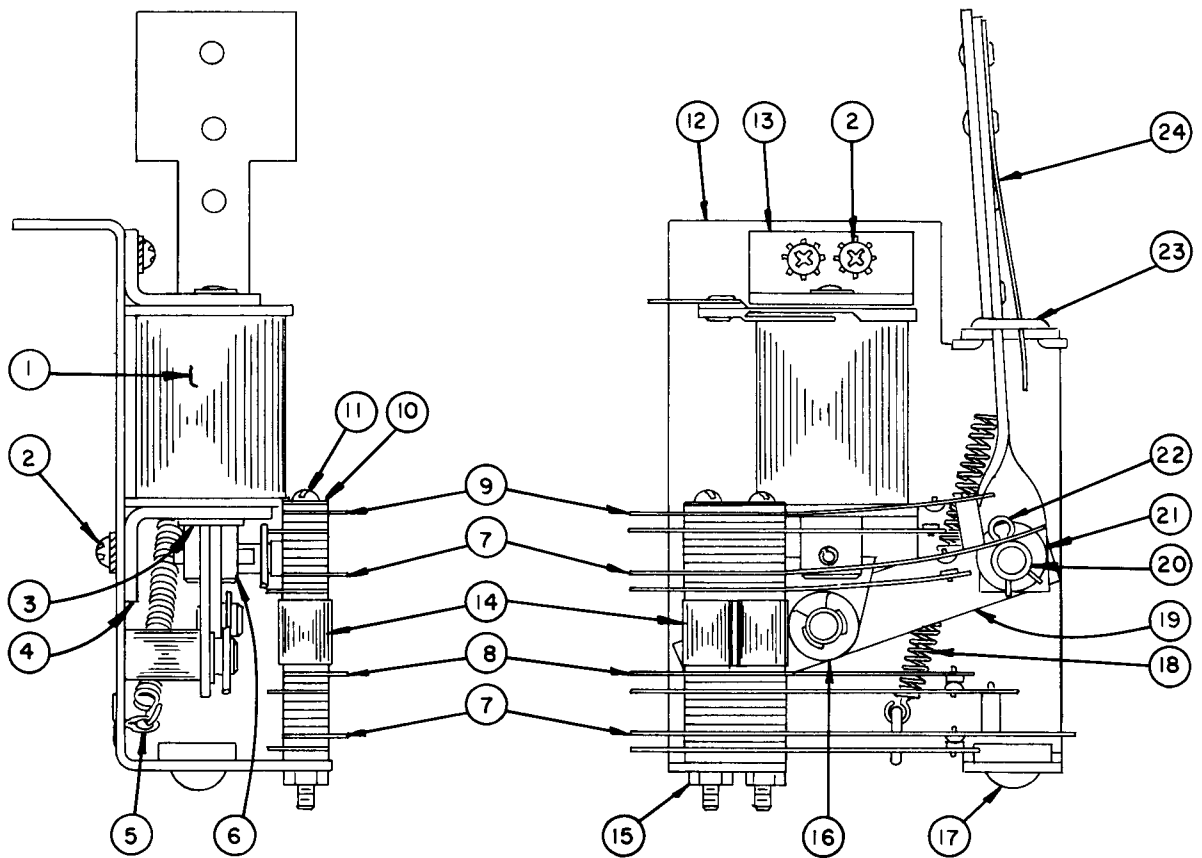


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	464-2518-I	COMPLETE DROP TARGET ASS'Y	11		#4-40 x 2-1/2" LG. RD. M.S.
	464-2518-J	COMPLETE DROP TARGET ASS'Y	12	446-2502	DROP TARGET MTG. BRKT. ASS'Y
	464-2518-K	COMPLETE DROP TARGET ASS'Y	13	347-2512	PLUNGER STOP ASS'Y
	464-2518-L	COMPLETE DROP TARGET ASS'Y	14	#16552-8-1	PLASTIC SPACER
1	J-22-550	COIL COMPLETE	15		#4-40 HEX NUT
2		#6-32 x 1/4" LG. SEMS UNIT	16	#6722X21	RETAINING RING
3	130-805	SOLENOID TUBING	17	#6079	RUBBER BUMPER
4	347-508	COIL SUPPORT BRACKET	18	300-901-A	SPRING
5	#6753-8	3/32 DIA. x 1/2" LG. COTTER PIN	19	446-2501	DROP TARGET RESET ARM ASS'Y
6	439-2509	PLUNGER & LINK ASS'Y	20	#6527	3/8" LG. PLASTIC SLEEVE
7	#437	CONTACT SWITCH ASS'Y	21	#5330	WASHER
8	#437-C	CONTACT SWITCH ASS'Y	22	91-905	SPRING CLIP
9	#437-B	CONTACT SWITCH ASS'Y ON TARGETS J, K & L	23	439-904	TARGET ARM RETAINER
	#437-D	CONTACT SWITCH ASS'Y ON TARGET I ONLY	24	464-2510-I	DROP TARGET ASS'Y
10	#6771	TINNERMAN SPACER		464-2510-J	DROP TARGET ASS'Y
				464-2510-K	DROP TARGET ASS'Y
				464-2510-L	DROP TARGET ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

BALL KICKER UNIT

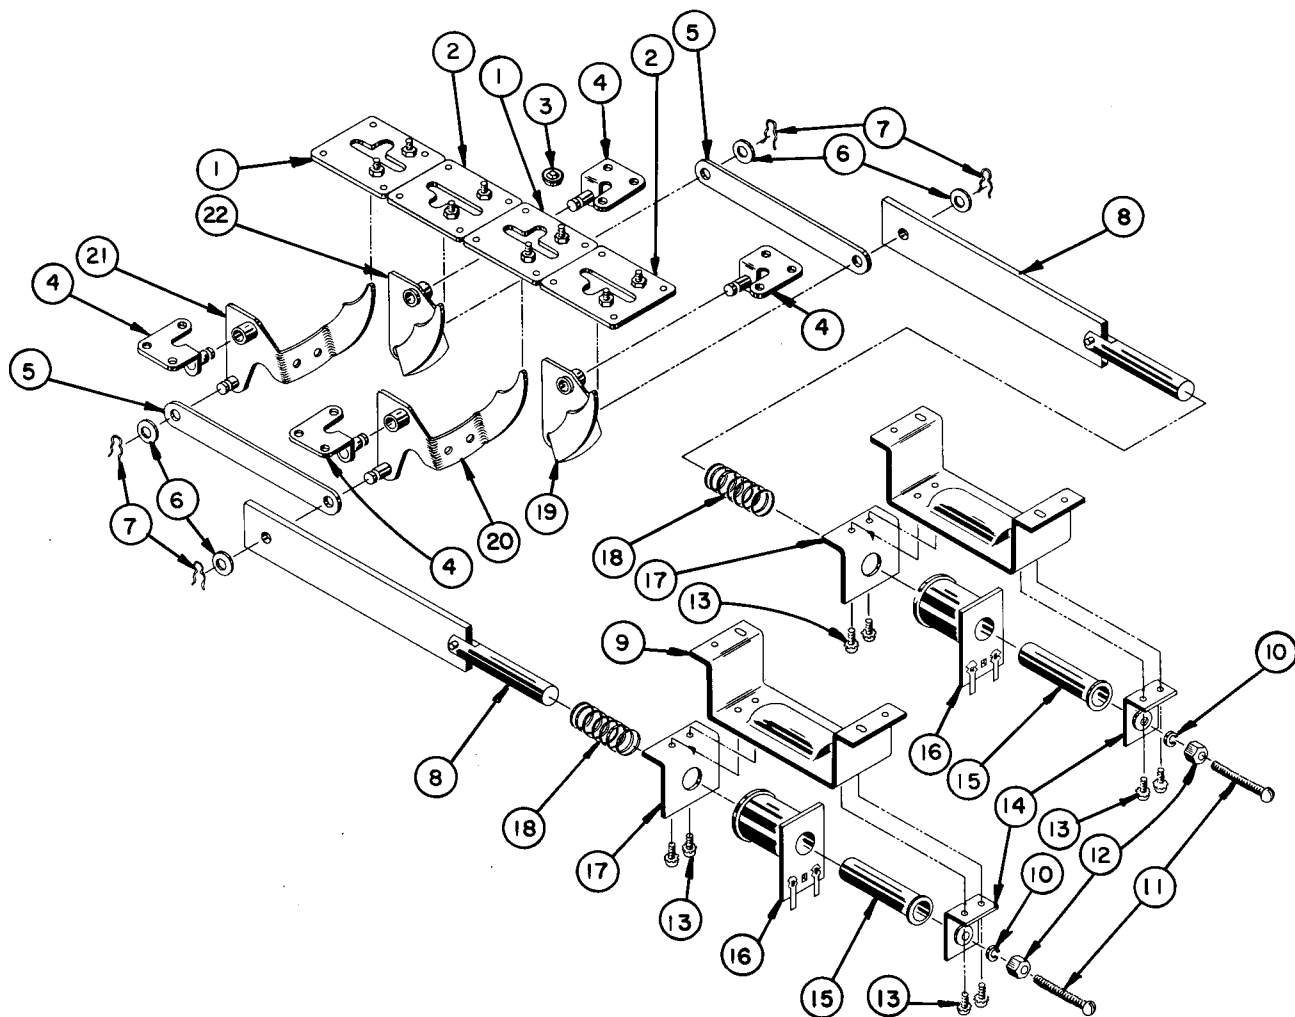

ITEM	PART NO.	DESCRIPTION
------	----------	-------------

1	464-2514-R	KICKER PAD ASS'Y
2	464-2514-L	KICKER PAD ASS'Y
3	#5401	#8 COUNTER SINK FINISHING WASHER
4	295-2509	KICKER ARM BRKT. ASS'Y
5	464-502	BALL KICKER ARM LINK
6	#5330	WASHER
7	91-905	SPRING CLIP
8	464-2506	BALL KICKER PLUNGER & LINK ASS'Y
9	347-504	COIL MTG. BRACKET
10	#5428	#10 SPLIT TYPE LOCKWASHER
11		#10-32 x 1" LG. BRASS RD. HD. M.S.


ITEM	PART NO.	DESCRIPTION
------	----------	-------------

12		#10-32 HEX NUT
13		#6-32 x 1/4 LG. SEMS UNIT
14	124-2500	PLUNGER STOP ASS'Y
15	130-805	SOLENOID TUBING
16	J-26-800	COIL COMPLETE
17	347-505	COIL SUPPORT BRACKET
18	209-901	SPRING
19	464-2502	BALL KICKER ARM ASS'Y (FRONT LEFT FORMED)
20	464-2504	BALL KICKER ARM ASS'Y (FRONT RIGHT FORMED)
21	464-2505	BALL KICKER ARM ASS'Y (REAR RIGHT FORMED)
22	464-2503	BALL KICKER ARM ASS'Y (REAR LEFT FORMED)

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

UNDERSIDE OF PLAYFIELD

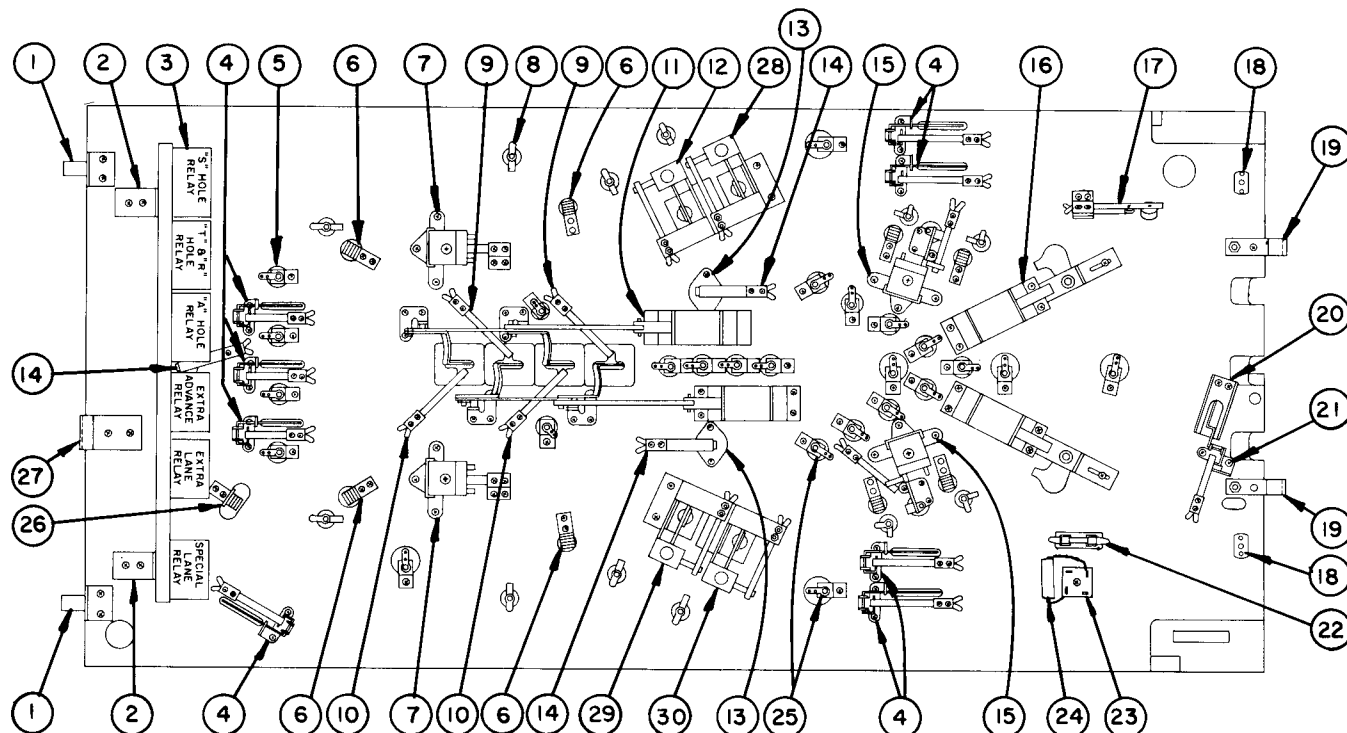

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	295-2529	PLAYFIELD LOCK ASS'Y	17	339-514	TILT CONTACT BRACKET
2	439-513	RELAY BOARD MTG. LEG		#302	TILT CONTACT SWITCH
3		FOR THESE RELAYS SEE PAGE 28	18	#6807	#8-32 "T" NUT
4	295-2557	ROLL OVER WIRE FORM ASS'Y	19	326-525	PLAYFIELD SUPPORT BRACKET
5	#5231	BAYONET SOCKET	20		BALL EJECTOR UNIT (SEE PAGE 7)
6	437-2506	CONTACT SWITCH & BRKT. ASS'Y	21	295-511	ROLL OVER MTG. BRACKET
7	455-2518	THUMPER BUMPER ASS'Y (SEE PAGE 10)		326-904	BALL EJECTOR WIRE FORM
8	#5232	BAYONET SOCKET	22	#5747-1	1 PLACE FUSE BLOCK ASS'Y
	#5112	#47 BULBS IN ALL THE SOCKETS		#5712-010	10 AMP FUSE
9	#201-D & 201	CONTACT SWITCH ASS'Y	23	#5608-1	RECTIFIER
10	#201-D	CONTACT SWITCH ASS'Y	24	#5607-A-1/200	1 MFD 200VDC CAPACITOR
11		BALL KICKER ASS'Y (SEE PAGE 13)	25	#5240	BAYONET SOCKET
12	464-2518-1	DROP TARGET ASS'Y (SEE PAGE 12)	26	464-2508	TARGET & SWITCH ASS'Y (SEE BACK INSIDE COVER)
13	408-2502	ROLL OVER BUTTON ASS'Y (SEE PAGE 15)	27	295-586	PLAYFIELD LIMIT BRKT.
14	393-514	FINGER STOP	28	464-2518-J	DROP TARGET ASS'Y (SEE PAGE 12)
	#420	CONTACT SWITCH ASS'Y	29	464-2518-K	DROP TARGET ASS'Y (SEE PAGE 12)
15		ACTION KICKER (SEE PAGE 11)	30	464-2518-L	DROP TARGET ASS'Y (SEE PAGE 12)
16		FLIPPER ASS'Y (SEE PAGE 9)			


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

ROLL OVER BUTTON & TARGET SWITCH ASSEMBLY


408-2502

COMPLETE (INCLUDES 5 ITEMS UNDER LINED)

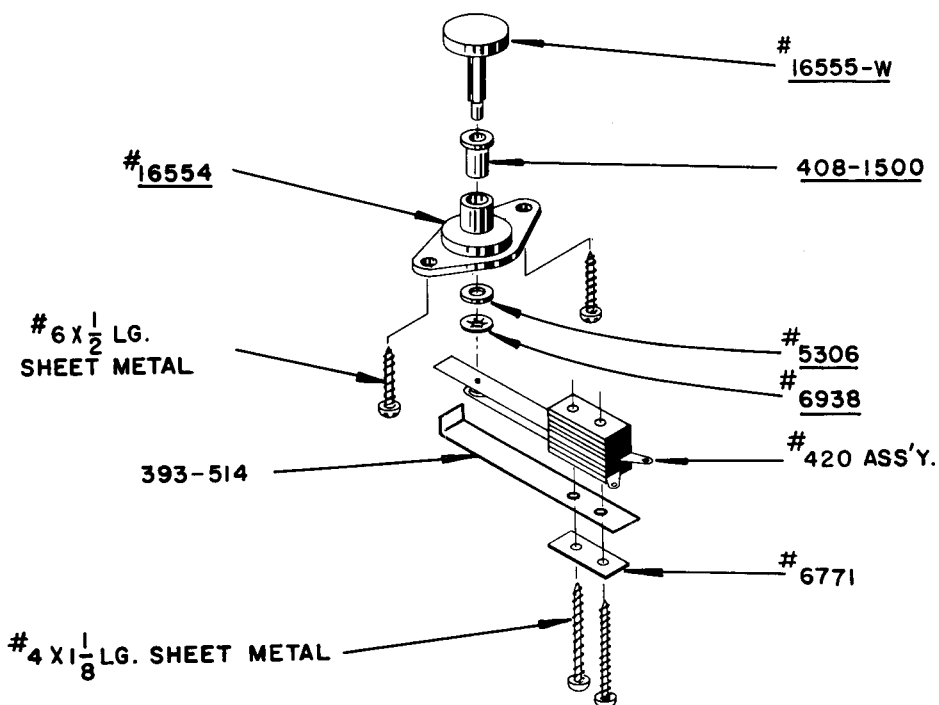


100,000'S RELAY BOARD ASSEMBLY

456-2501

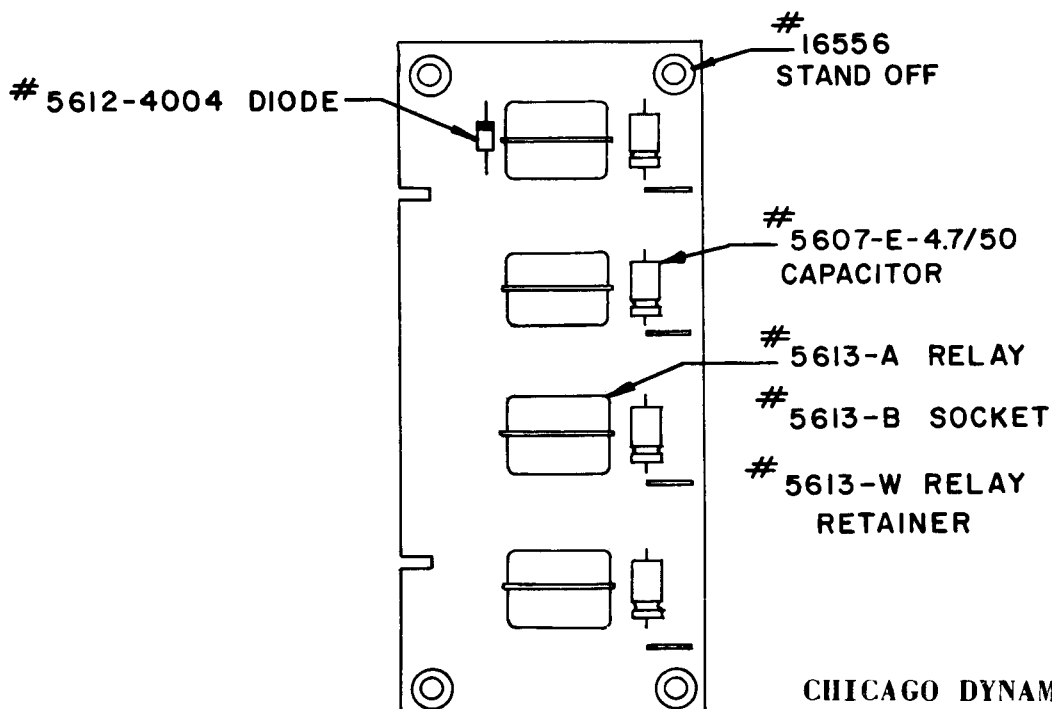

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

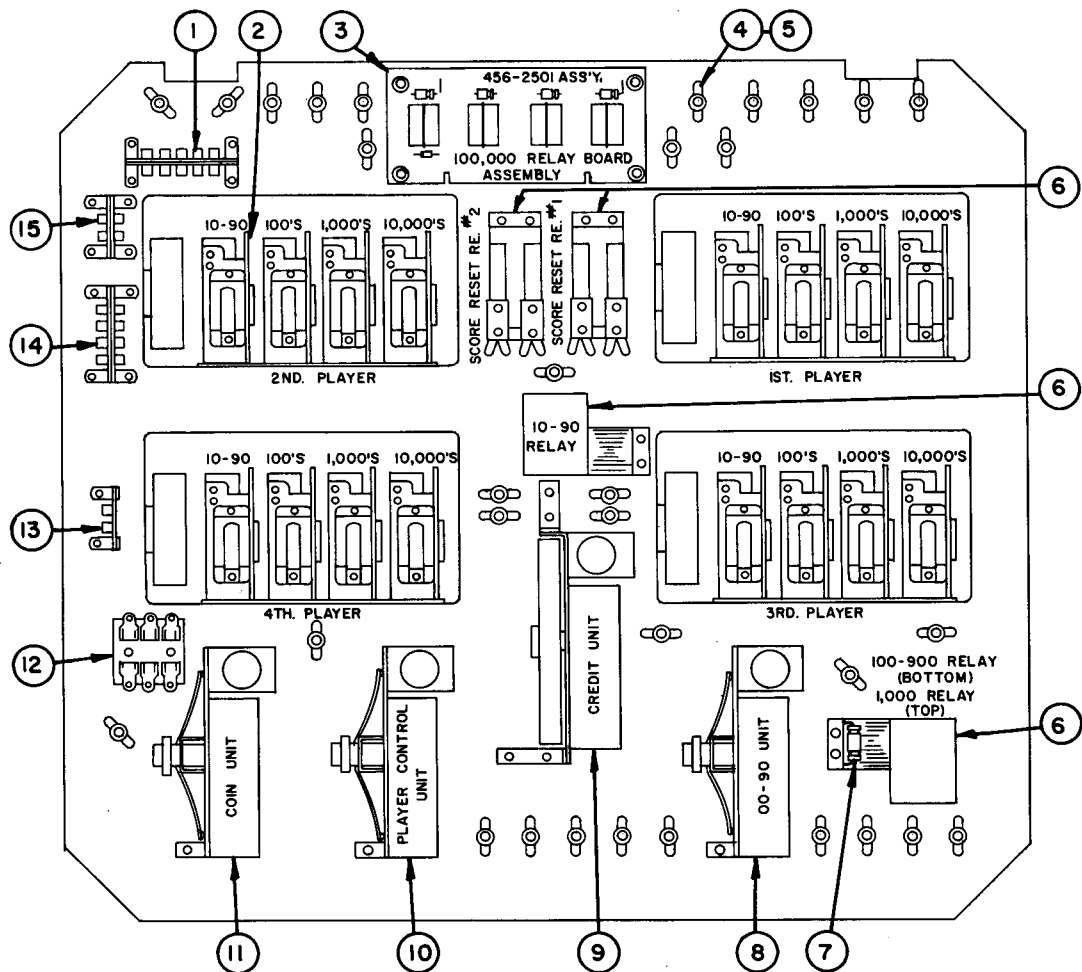

ITEM	PART NO.	DESCRIPTION
1	#5879	10 POINT REGULAR SOCKET
2		SCORING DRUM UNITS (SEE PAGE 26)
3	456-2501	100,000's RELAY BOARD ASS'Y (SEE PAGE 15)
4	#5232	BAYONET SOCKET
5	#5112	#47 BULB
6		FOR ALL THESE RELAYS SEE PAGE 29
7	#5607-A-5-10/50	NON POLARIZED CAPACITOR
8	130-2571-B	00-90 UNIT (SEE PAGE 23)
9	130-2532-H	CREDIT UNIT (SEE PAGE 21)
10	130-2568-B	PLAYER CONTROL UNIT (SEE PAGE 18)
11	130-2568-A	COIN UNIT (SEE PAGE 19)
12	#5747-3	3 PLACE FUSE BLOCK ASS'Y
	5711-.700	.700 AMP FUSE (3 REQ'D.)
13	#5816	2 POINT INLINE SOCKET
14	#5878	8 POINT REGULAR SOCKET
15	#5876	4 POINT REGULAR SOCKET

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

The diagram illustrates the electrical wiring for a pinball machine. It features two main rows of components connected to a common ground line at the bottom.

Top Row Components (Left to Right):

- Transformer:** Connected to point 1.
- Ball Count Unit:** Connected to point 2.
- Ball Count Switch:** Connected to point 3.
- Bonus Unit:** Connected to point 5.
- Tilt Switch:** Connected to point 7.
- Score Motor Unit:** Connected to point 10.
- Game Over/Play/Reset Switch Assembly:** Includes a "KICK OFF SWITCH" connected to point 6, and a switch assembly with "1 COIN=PLAY", "2 COINS=3 PLAYS", "RIGHT CHUTE", "GAME ADJ.", and "OFF ON" positions, connected to points 11 and 12.

Bottom Row Components (Left to Right):

- Bonus Collect Relay 12:** Connected to point 1.
- Tilt Relay 11:** Connected to point 2.
- Out-Hole Relay 10:** Connected to point 3.
- Anti-Cheat Relay 9:** Connected to point 4.
- Credit Reset Relay 8:** Connected to point 5.
- Right Chute Relay 7:** Connected to point 6.
- Coin Relay 6:** Connected to point 7.
- Lock Relay 5:** Connected to point 8.
- Start Relay 4:** Connected to point 9.
- Reset Relay 3:** Connected to point 10.
- Player Control Relay 2:** Connected to point 11.
- Fuse Block Ass'y:** Connected to point 12.
- Total Play Meter:** Connected to point 13.


Wiring Connections:

- Point 1: Transformer and Bonus Collect Relay 12.
- Point 2: Ball Count Unit and Tilt Relay 11.
- Point 3: Ball Count Switch and Out-Hole Relay 10.
- Point 4: Bonus Unit and Anti-Cheat Relay 9.
- Point 5: Tilt Switch and Credit Reset Relay 8.
- Point 6: Score Motor Unit and Right Chute Relay 7.
- Point 7: Kick Off Switch and Coin Relay 6.
- Point 8: Game Over/Play/Reset Switch Assembly and Lock Relay 5.
- Point 9: Game Over/Play/Reset Switch Assembly and Start Relay 4.
- Point 10: Game Over/Play/Reset Switch Assembly and Reset Relay 3.
- Point 11: Game Over/Play/Reset Switch Assembly and Player Control Relay 2.
- Point 12: Game Over/Play/Reset Switch Assembly and Fuse Block Ass'y.
- Point 13: Total Play Meter.

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

PLAYER CONTROL UNIT

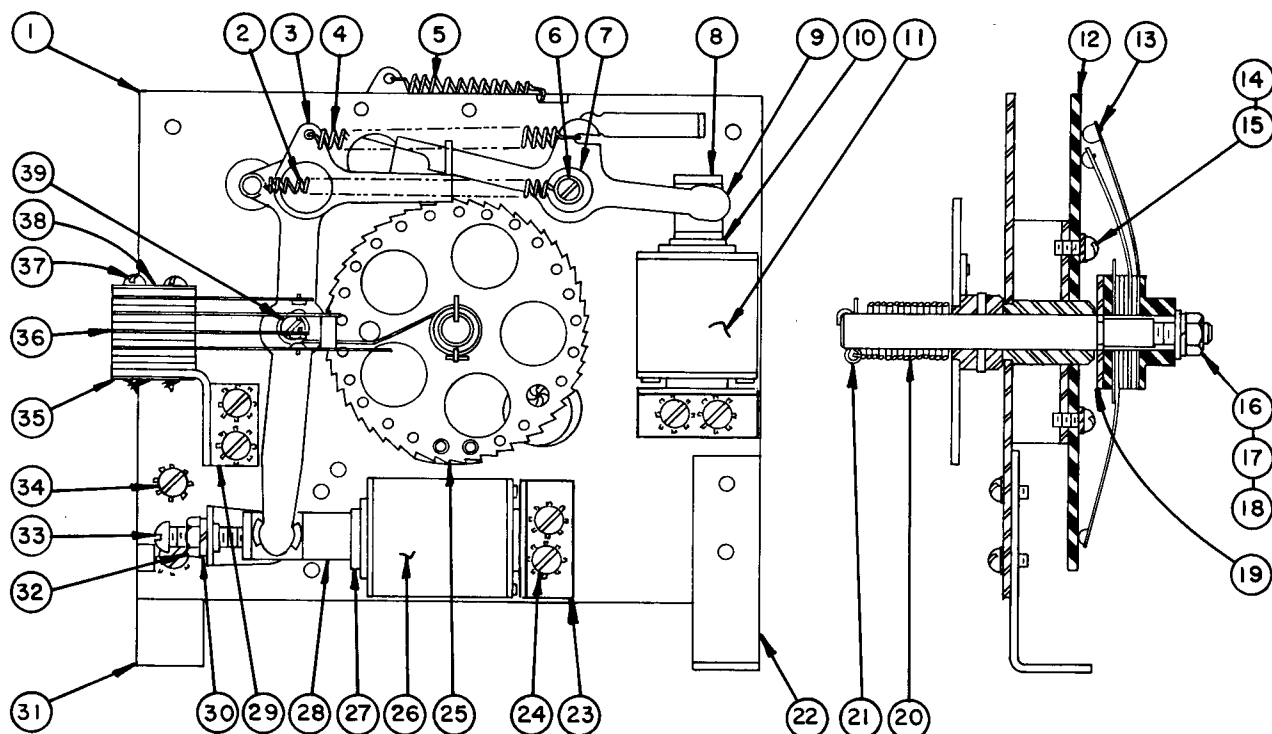


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2568-B	COMPLETE PLAYER CONTROL UNIT (3 STEP)	20	130-905	TORSION SPRING
1	130-2502	MOUNTING PLATE ASS'Y	21	#6752-10	COTTER PIN
2	130-910-18	SPRING	22	130-560-AS	MOUNTING LEG
3	130-2511	OPERATING ARM ASS'Y	23	347-2512	PLUNGER STOP ASS'Y
4	130-901	SPRING	24		#6-32 x 1/4 LG. SEMS UNIT
5	130-904	SPRING	25	130-2542-3	RATCHET & POST ASS'Y
6	130-1510	RESET ARM POST	26	J-22-550	STEP-UP COIL
7	130-1517	RESET ARM BUSHING	27	130-1535	STEP-UP SOLENOID TUBING
8	91-1507	RESET PLUNGER	28	91-1538	STEP-UP PLUNGER
9	130-2513	RESET ARM ASS'Y	29	130-511	DOUBLE CONTACT BRKT.
10	130-1536	RESET SOLENOID TUBING	30	#5428	LOCKWASHER
11	H-26-650	RESET COIL	31	130-560-A	MOUNTING LEG
12	456-2506	CONTACT PLATE ASS'Y	32		#10-32 x 3/4 LG. BRASS R.H.M.S.
13	456-2507	WIPER FINGER ASS'Y	33		#10-32 HEX NUT
14		#6-32 x 3/8 LG. SEMS UNIT	34		#8-32 x 1/4 LG. SEMS
15	#5305	FLAT WASHER	35	#6770	TINNERMAN NUT
16		1/4-28 HEX NUT	36	#128 & #80	CONTACT SWITCH ASS'Y
17	#5429	LOCKWASHER	37		#4 S.M.S. LENGTH AS REQUIRED
18	#5331	PLAIN WASHER	38	#6771	TINNERMAN SPACER
19	130-518	FINGER BACK-UP WASHER	39	130-1508	OPERATING ARM POST

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

COIN UNIT

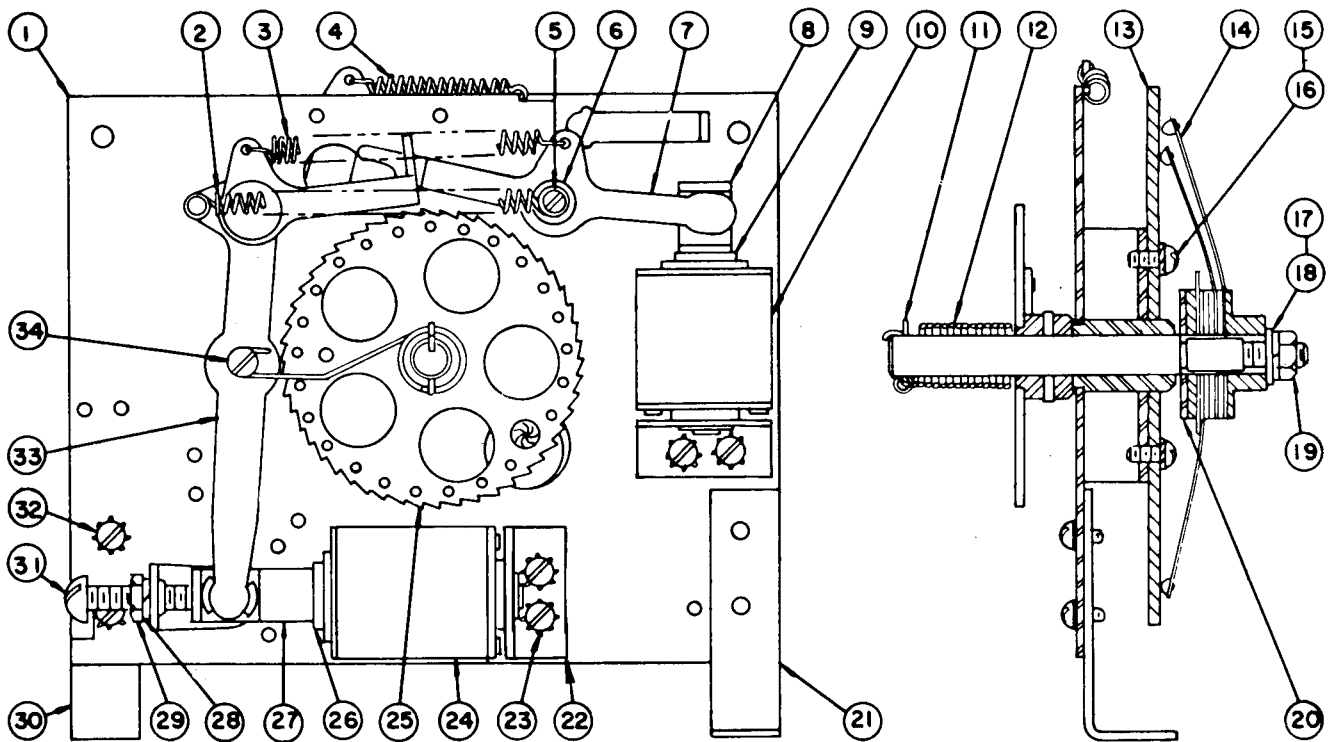

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2568-A	COMPLETE COIN UNIT (3 STEPS)	18	#5429	SPLIT TYPE LOCKWASHER
1	130-2502	MTG. PLATE, BRKT. & BUSHING ASS'Y	19		#1/4-28 HEX NUT
2	130-910-18	SPRING	20	130-518	CONTACT WASHER
3	130-901	SPRING	21	130-560-AS	MOUNTING LEG
4	130-904	SPRING	22	347-2512	PLUNGER STOP ASS'Y
5	130-1510	RESET ARM POST	23		#6-32 x 1/4 LG. SEMS
6	130-1517	RESET POST BUSHING	24	J-22-550	COIL COMPLETE
7	130-2513	RESET ARM ASS'Y	25	130-2524-3	3 STEP SHAFT, BUSHING, RATCHET & STUD ASS'Y
8	91-1507	OPERATING PLUNGER	26	130-1535	SOLENOID TUBING
9	91-1509	SOLENOID TUBING	27	91-1538	OPERATING PLUNGER
10	H-26-650	COIL COMPLETE	28	#5428	SPLIT TYPE LOCKWASHER
11	#6752-10	COTTER PIN	29		#10-32 HEX NUT
12	130-905	TORSION SPRING	30	130-560-A	MOUNTING LEG
13	456-2503	CONTACT PLATE (COIN UNIT)	31		#10-32 x 3/4 LG. BRASS R.H.M.S.
14	456-2502	WIPER FINGER (COIN UNIT)	32		#8-32 x 1/4 SEMS
15		#6-32 x 3/8 LG. SEMS	33	130-2538	OPERATING ARM & POST ASS'Y
16	#5303	WASHER	34	130-1508	OPERATING ARM POST
17	#5331	WASHER			


BALL COUNT UNIT

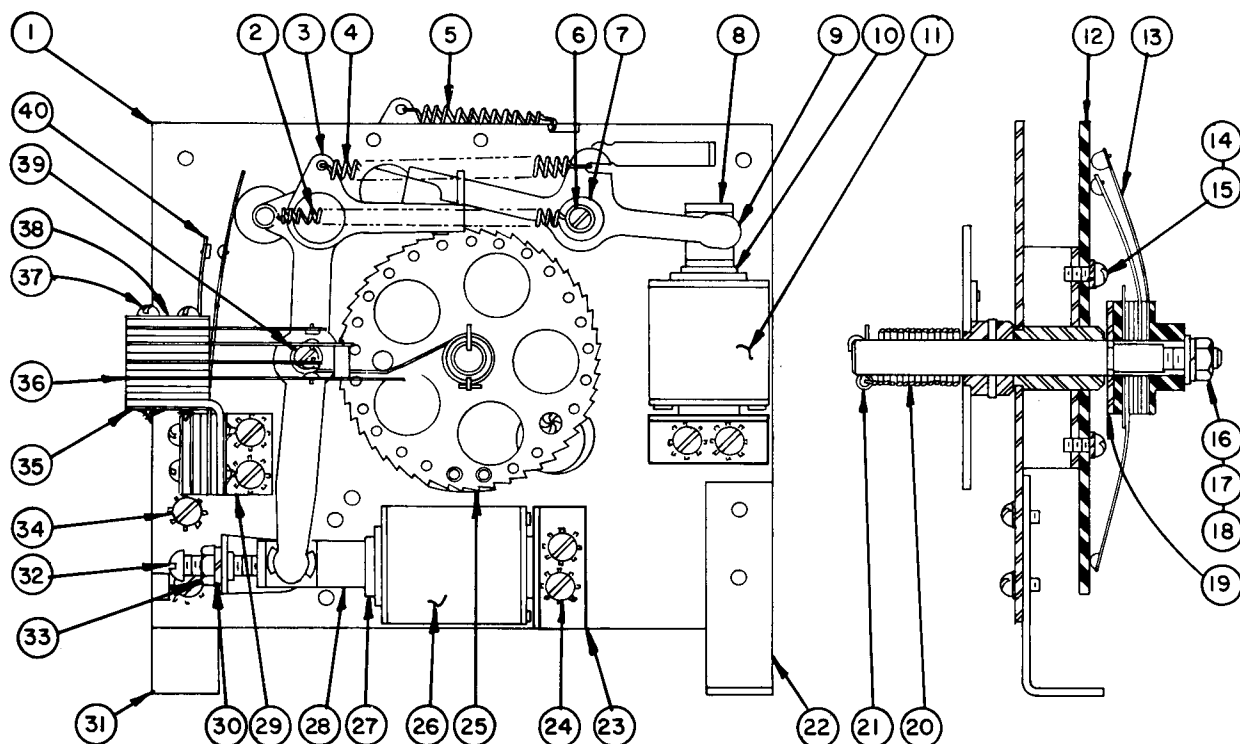

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2568-B	COMPLETE BALL COUNT UNIT (5 STEPS)	21	#6752-10	COTTER PIN
1	130-2502	MOUNTING PLATE ASS'Y	22	130-560-AS	MOUNTING LEG
2	130-910-18	SPRING -	23	347-2512	PLUNGER STOP ASS'Y
3	130-2511	OPERATING ARM ASS'Y	24		#6-32 x 1/4 LG. SEMS UNIT
4	130-901	SPRING	25	130-2542-5	RATCHET & POST ASS'Y
5	130-904	SPRING	26	J-22-550	STEP-UP COIL
6	130-1510	RESET ARM POST	27	130-1535	STEP-UP SOLENOID TUBING
7	130-1517	RESET ARM BUSHING	28	91-1538	STEP-UP PLUNGER
8	91-1507	RESET PLUNGER	29	130-511	DOUBLE CONTACT BRKT.
9	130-2513	RESET ARM ASS'Y	30	#5428	LOCKWASHER
10	130-1536	RESET SOLENOID TUBING	31	130-560-A	MOUNTING LEG
11	H-26-650	RESET COIL	32		#10-32 x 3/4 LG. BRASS R.H.M.S.
12	347-2513-D	CONTACT PLATE ASS'Y	33		#10-32 HEX NUT
13	465-2501	WIPER FINGER ASS'Y	34		#8-32 x 1/4 LG. SEMS
14		#6-32 x 3/8 LG. SEMS UNIT	35	#6770	TINNERMAN NUT
15	#5305	FLAT WASHER	36	#128 & #80	CONTACT SWITCH ASS'Y
16		1/4-28 HEX NUT	37		#4 S.M.S. LENGTH AS REQUIRED
17	#5429	LOCKWASHER	38	#6771	TINNERMAN SPACER
18	#5331	PLAIN WASHER	39	130-1508	OPERATING ARM POST
19	130-518	FINGER BACK-UP WASHER	40	#108	SWITCH ASS'Y
20	130-905	TORSION SPRING			


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

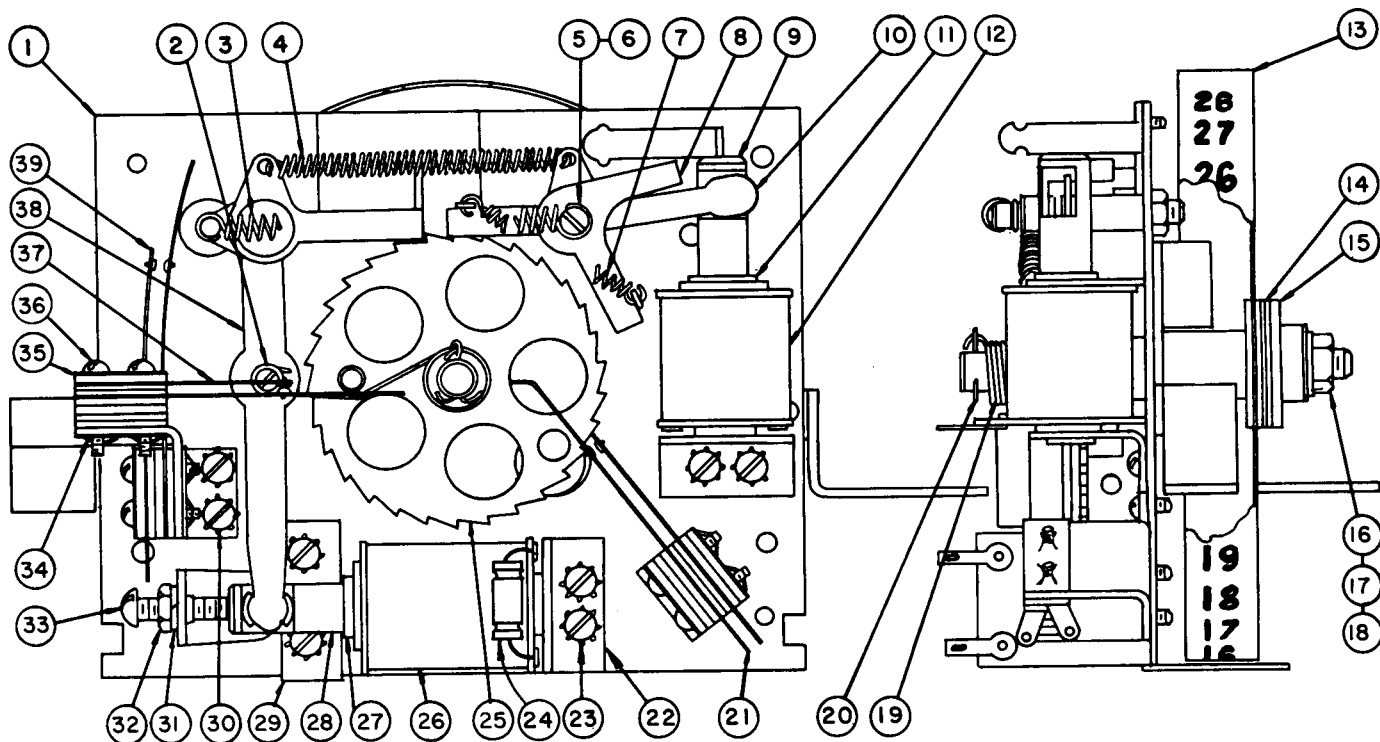

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2532-H	COMPLETE CREDIT UNIT	20	#6752-10	COTTER PIN
1	130-2597	MOUNTING PLATE ASS'Y	21	#46	SWITCH ASS'Y
2	130-1508	OPERATING ARM POST	22	347-2512	PLUNGER STOP ASS'Y
3	130-910-18	SPRING	23		#6-32 x 1/4 LG. SEMS UNIT
4	130-901	SPRING	24	#5607-A-5-10/50	NON POLARIZED CAPACITOR
5	130-1510	RESET ARM POST	25	130-2579	SHAFT, BUSHING, RATCHET & STUD ASS'Y
6	130-1517	RESET POST BUSHING	26	J-22-550	COIL (STEP-UP)
7	129-900	SPRING	27	130-1535	STEP-UP SOLENOID TUBING
8	130-2514	ESCAPEMENT PAWL & BUSHING	28	130-1513	STEP-UP PLUNGER
9	130-1539	RESET PLUNGER	29	130-532	WINDOW BRACKET
10	130-2513	RESET ARM ASS'Y	30	130-511	DOUBLE CONTACT BRACKET
11	130-1536	RESET SOLENOID TUBING	31	#5428	LOCKWASHER
12	H-26-650	COIL RESET	32		#10-32 HEX NUT
13	130-2552	DRUM ASS'Y	33		#10-32 x 3/4 LG. BRASS R.H.M.S.
14	130-518	WASHER	34	#6770	TINNERMAN NUT
15	130-806	FINGER HUB	35	#6771	TINNERMAN SPACER
16		1/4-28 HEX NUT	36		#4 S.M.S. LENGTH AS REQUIRED
17	#5429	LOCKWASHER	37	#108	SWITCH ASS'Y
18	#5331	PLAIN WASHER	38	130-2533	OPERATING ARM & POST ASS'Y
19	130-907	TORSION SPRING	39	#108	SWITCH ASS'Y


BONUS UNIT

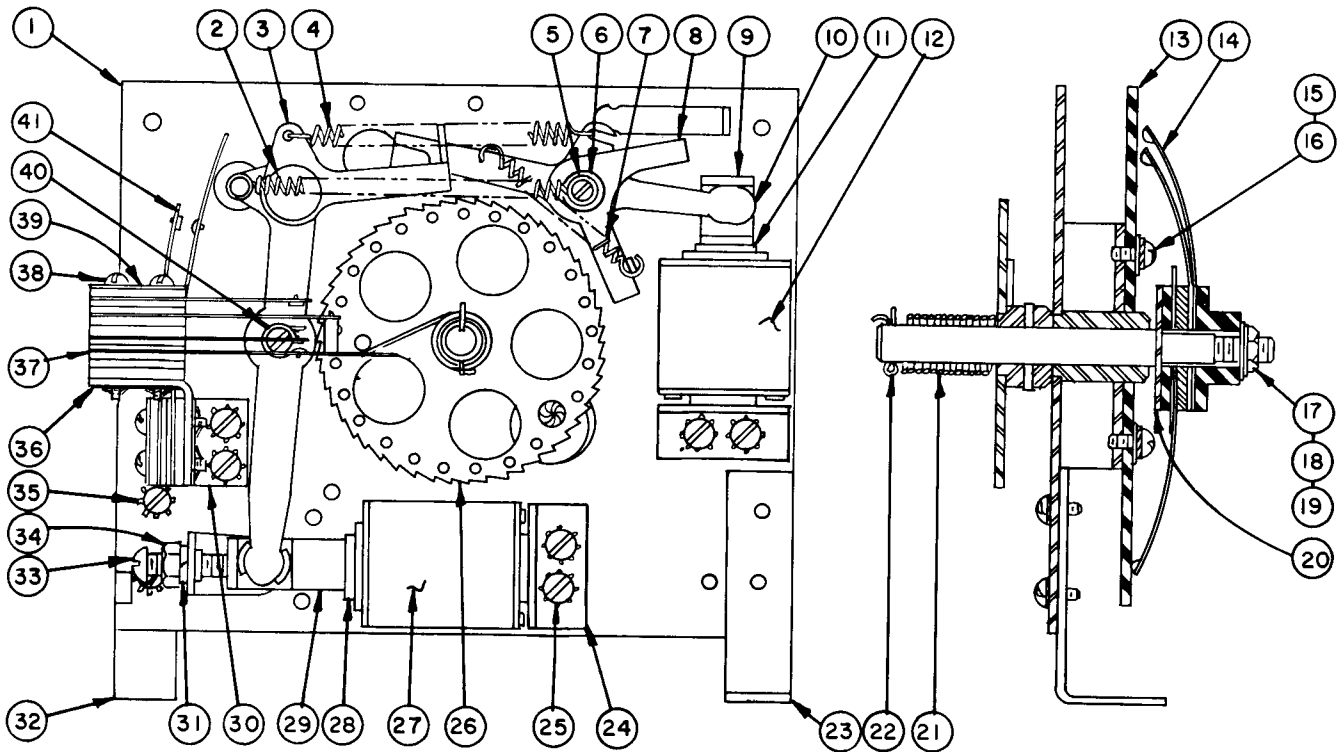

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2519-A	COMPLETE BONUS UNIT (19 STEPS)	21	130-905	TORSION SPRING
1	130-2502	MOUNTING PLATE ASS'Y	22	#6752-10	COTTER PIN
2	130-910-18	SPRING	23	130-560-AS	MOUNTING LEG
3	130-2511	OPERATING ARM ASS'Y	24	347-2512	PLUNGER STOP ASS'Y
4	130-901	SPRING	25		#6-32 x 1/4 LG. SEMS UNIT
5	130-1510	RESET ARM POST	26	130-2542-19	RATCHET & POST ASS'Y
6	130-1517	RESET ARM BUSHING	27	J-22-550	STEP-UP COIL
7	129-900	SPRING	28	130-1535	STEP-UP SOLENOID TUBING
8	130-2514	ESCAPEMENT PAWL & BUSHING	29	91-1538	STEP-UP PLUNGER
9	91-1507	RESET PLUNGER	30	130-511	DOUBLE CONTACT BRKT.
10	130-2513	RESET ARM ASS'Y	31	#5428	LOCKWASHER
11	130-1536	RESET SOLENOID TUBING	32	130-560-A	MOUNTING LEG
12	H-26-650	RESET COIL	33		#10-32 x 3/4 LG. BRASS R.H.M.S.
13	373-2510-E	CONTACT PLATE ASS'Y	34		#10-32 HEX NUT
14	431-2501	WIPER FINGER ASS'Y	35		#8-32 x 1/4 LG. SEMS
15		#6-32 x 3/8 LG. SEMS UNIT	36	#6770	TINNERMAN NUT
16	#5305	FLAT WASHER	37	#120 & #80	CONTACT SWITCH ASS'Y
17		1/4-28 HEX NUT	38		#4 S.M.S. LENGTH AS REQUIRED
18	#5429	LOCKWASHER	39	#6771	TINNERMAN SPACER
19	#5331	PLAIN WASHER	40	130-1508	OPERATING ARM POST
20	130-518	FINGER BACK-UP WASHER	41	#108	SWITCH ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

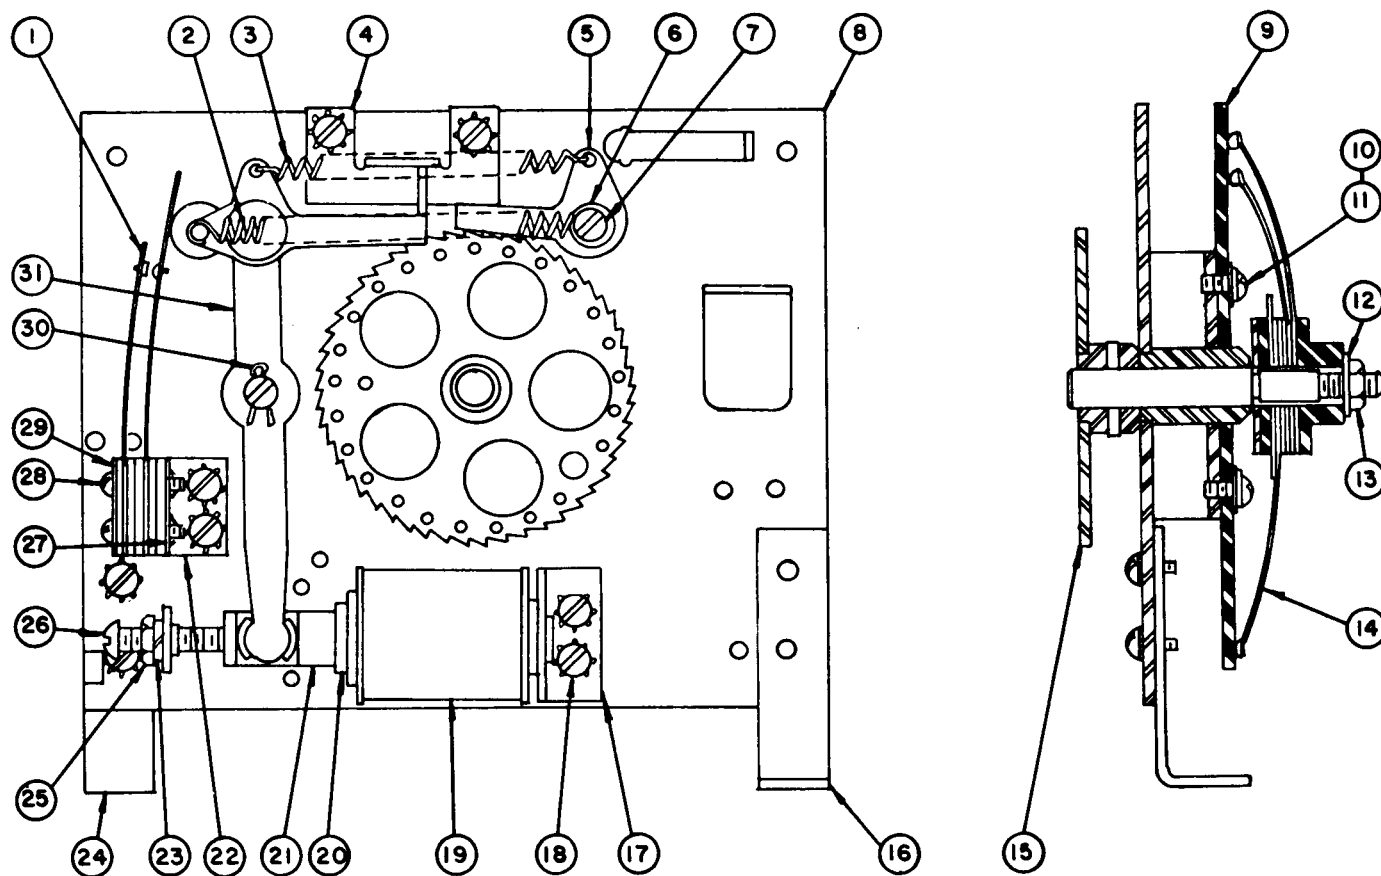


ITEM	PART NO.	DESCRIPTION
	130-2571-B	COMPLETE 00-90 UNIT
1	#108	CONTACT SWITCH ASS'Y
2	130-910-21	SPRING
3	130-901	SPRING
4	130-531	OVER RIDE RESTRAINER
5	130-2517	HOLDING PAWL & BUSHING ASS'Y
6	130-1517	RESET POST BUSHING
7	130-1510	RESET PAWL POST
8	130-2505	MOUNTING PLATE, BRKT. & BUSHING ASS'Y
9	344-2515-L	CONTACT PLATE ASS'Y (00-90 UNIT)
10	#5305	FLAT WASHER
11		#6-32 x 3/8 LG. SEMS UNIT
12	#5429	SPLIT TYPE LOCKWASHER
13		#1/4-28 HEX NUT
14	344-2506	WIPER FINGER ASS'Y (00-90 UNIT)
15	130-2546	SHAFT, BUSHING & RATCHET ASS'Y

ITEM	PART NO.	DESCRIPTION
16	130-560-AS	MOUNTING LEG
17	347-2512	PLUNGER STOP ASS'Y
18		#6-32 x 1/4 LG. SEMS UNIT
19	J-23-700	COIL COMPLETE
20	130-1535	SOLENOID TUBING
21	91-1538	OPERATING PLUNGER
22	91-524	CONTACT BRACKET
23	#5428	SPLIT TYPE LOCKWASHER
24	130-560-A	MOUNTING LEG
25		#10-32 HEX NUT
26		#10-32 x 3/4 LG. BRASS R.H.M.S.
27	#6770	TINNERMAN NUT
28		#4 S.M.S. LENGTH AS REQUIRED
29	#6771	TINNERMAN SPACER
30	143-902	SPRING CLIP
31	130-2511	OPERATING ARM ASS'Y

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

TILT BOARD & KNOCKER ASSEMBLY

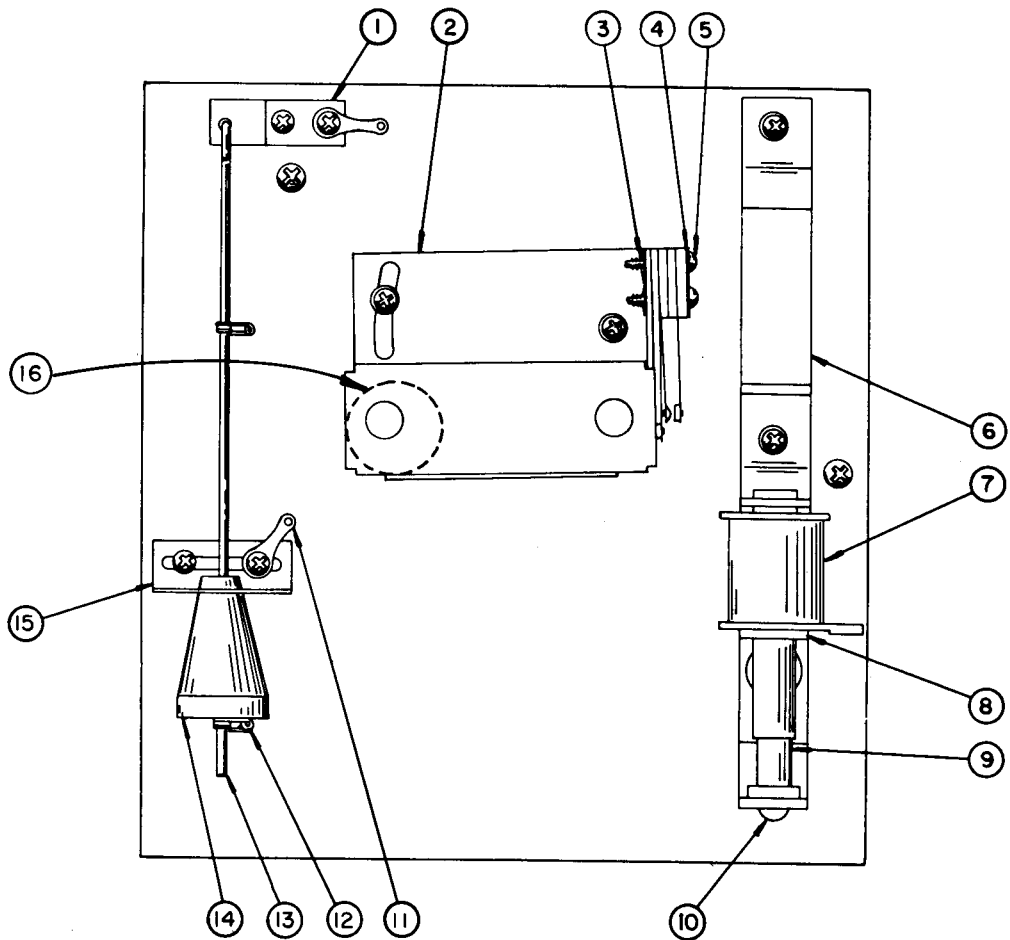


ITEM	PART NO.	DESCRIPTION
1	295-557	TILT PLUMB HANGER
2	339-511	ELEVATOR TILT
3	#6770	TINNERMAN NUT
4	#6771	TINNERMAN SPACER
5		#4 x 5/8" LG. S.M.S.
6	295-2538	KNOCKER MOUNTING BRACKET ASS'Y
7	N-26-1000	COIL COMPLETE
8	167-511	ADJ. COIL SUPPORT BRACKET
9	167-2507	PLUNGER & TIP ASSEMBLY
10	#6079	RUBBER GROMMET
11	#6654	SOLDERING LUG
12	231-907	TILT PLUMB SPRING
13	295-906	TILT PLUMB WIRE
14	295-1513	TILT PLUMB
15	295-556	TILT PLUMB CONTACT PLATE
16	#6717-C	1-1/16" DIA. CHROME STEEL BALL

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


CHIME ASSEMBLY

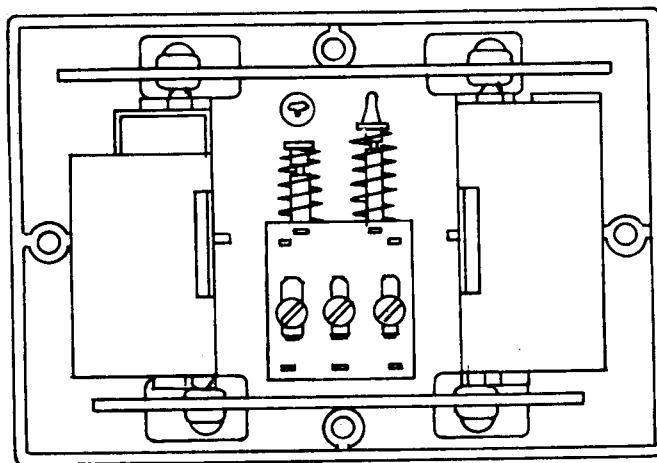

CHIME #5635

TRANSFORMER #5666-2518

FOR 115 VOLT
50/60 HZ INPUT




CONNECT #1 & #3 TOGETHER
CONNECT 2 & 5 TOGETHER

YELLOW = #1
BLACK = #2

DO NOT USE #4 OR #6 FOR 115 VOLT OPERATION

FOR 220-230-245 VOLT
50/60 HZ INPUT




CONNECT #2 & #3 TOGETHER

YELLOW = #1
BLACK TO #4 = 220 V.
BLACK TO #5 = 230 V.
BLACK TO #6 = 245 V.

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

SCORING DRUM UNIT

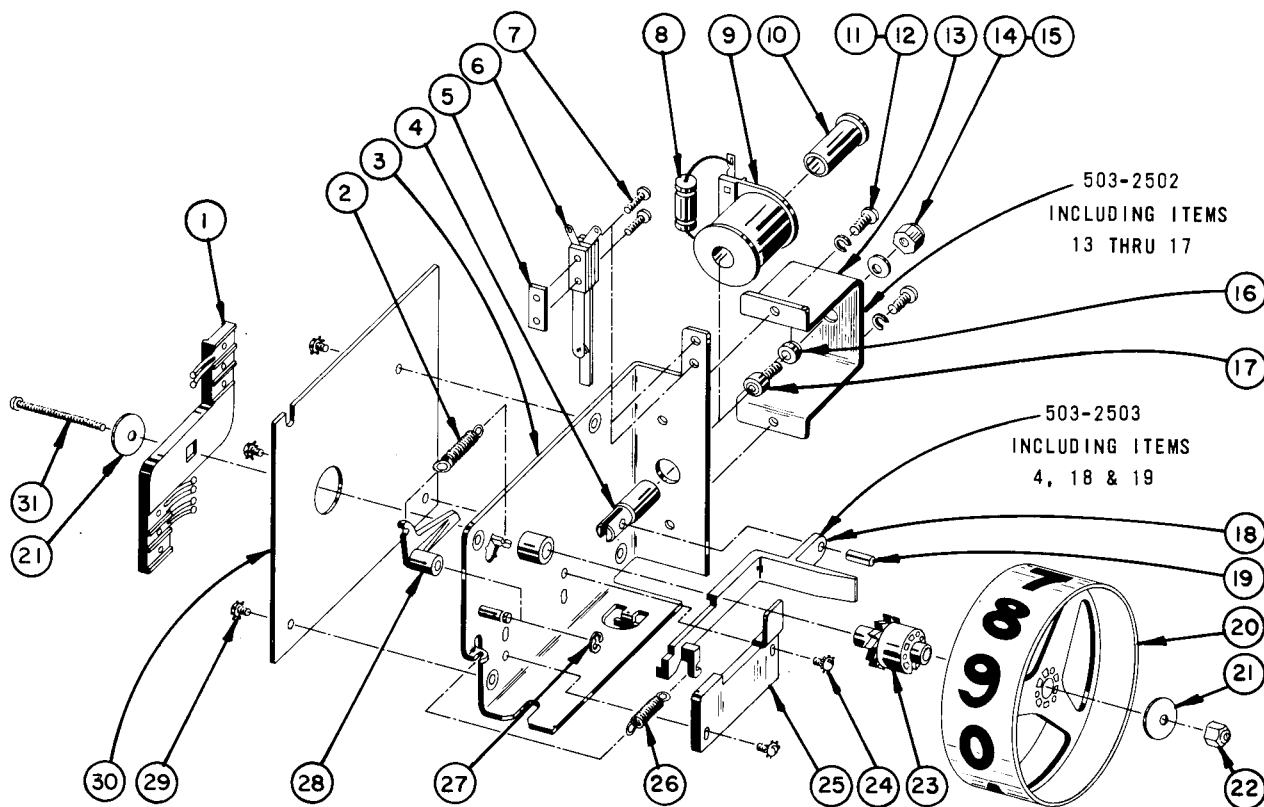


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	503E-2530-A	10-90, 100-900, 1000-9000 SCORING DRUM UNITS (12 REQ'D.)	15	#5322	BRASS WASHER
	503E-2530-B	10,000's SCORING DRUM UNITS (4 REQ'D)	16	500-1501	PLUNGER STOP BUSHING
1	503-2505	WIPER FINGER ASS'Y	17	500-2507	PLUNGER STOP & SLUG ASS'Y
2	503-901	SPRING (HOLDING PAWL)	18	503-802	OPERATING ARM
3	503-2501	MOUNTING PLATE ASS'Y	19	6703-6	ROLL PIN
4	503-1502	OPERATING PLUNGER	20	503-800-WB	DRUM
5	503-510	NUT PLATE	21	#5366	WASHER
6	#431-A	SWITCH ASS'Y (USED ON 503E-2530-A)	22		#4-40 ELASTIC STOP NUT
	#431-B	SWITCH ASS'Y (USED ON 503E-2530-B)	23	503-801	RATCHET
7		#2-56 x 1/2" LG. R.H.M.S.	24		#4-40 x 3/16 LG. SEMS UNIT
8	5607-A-5-10/50	NON POLARIZED CAPACITOR (USED ONLY ON 10,000's DRUMS)	25	503-803	ADJUSTABLE STOP
9	NA-26-900-X	COIL COMPLETE	26	300-900-B	SPRING (OPERATING ARM)
10	143-1516	SOLENOID TUBING	27	6722-14	RETAINING RING
11		#8-32 x 3/8" LG. TYPE "F" PHILLIP PAN HD. SELF TAPPING SCREW	28	503-804	HOLDING PAWL
12	#5427	SPLIT TYPE LOCKWASHER	29		#4-40 x 3/16 LG. TYPE "F" PHILLIP PAN HD. SELF TAPPING SCREW
13	503-506	COIL MTG. BRACKET	30	503E-507	COUNTER SWITCH P.C.
14		#10-32 ELASTIC STOP NUT	31		#4-40 x 1-1/4" LG. SLOTTED HD. M.S.

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

SCORE MOTOR CAMS

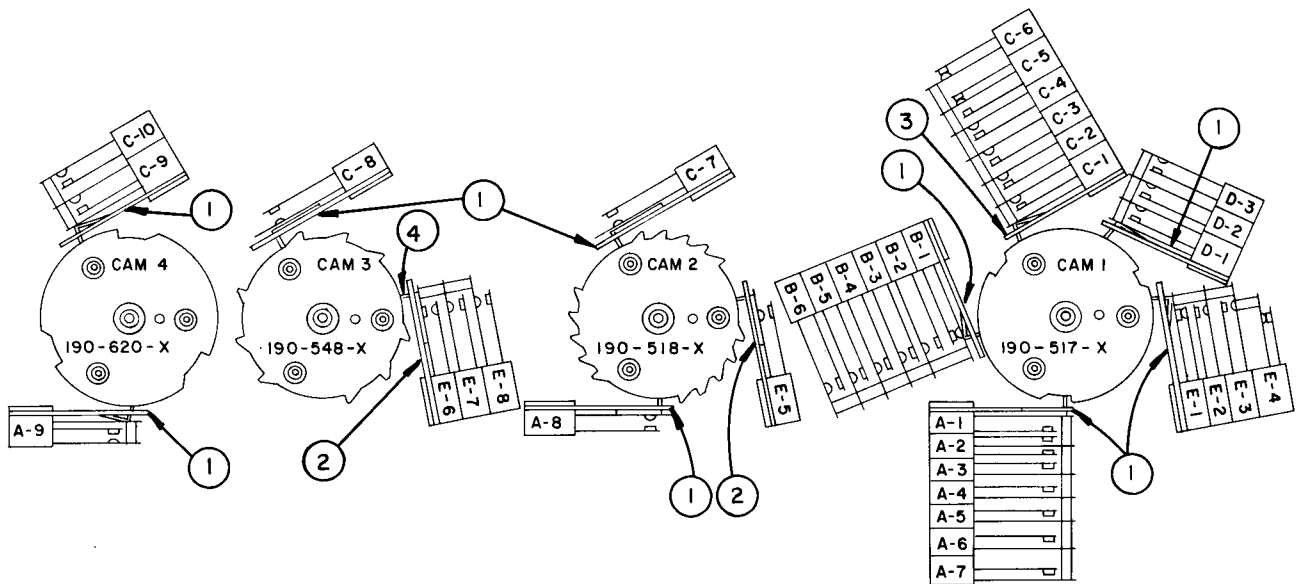


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	455-2509	SCORE MOTOR CAM ASS'Y	C-1	#62	SWITCH ASSEMBLY
	#5750-2333	SCORE MOTOR (60 Hz 22 RPM)	C-2	#57	SWITCH ASSEMBLY
	#5750-2334	SCORE MOTOR (50 Hz 22 RPM)	C-3	#64	SWITCH ASSEMBLY
1	115-501-F	CAM RIDER PLATE	C-4	#64	SWITCH ASSEMBLY
2	115-501-P	CAM RIDER PLATE	C-5	#234	SWITCH ASSEMBLY
3	115-501-A	CAM RIDER PLATE	C-6	#9-B	SWITCH ASSEMBLY
4	115-508	CAM RIDERS (12)	C-7	#63	SWITCH ASSEMBLY
A-1	#63	SWITCH ASSEMBLY	C-8	#63	SWITCH ASSEMBLY
A-2	#234	SWITCH ASSEMBLY	C-9	#60	SWITCH ASSEMBLY
A-3	#234	SWITCH ASSEMBLY	C-10	#57	SWITCH ASSEMBLY
A-4	#57	SWITCH ASSEMBLY	D-1	#60	SWITCH ASSEMBLY
A-5	#57	SWITCH ASSEMBLY	D-2	#325	SWITCH ASSEMBLY
A-6	#57	SWITCH ASSEMBLY	D-3	#57	SWITCH ASSEMBLY
A-7	#57	SWITCH ASSEMBLY	E-1	#63	SWITCH ASSEMBLY
A-8	#63	SWITCH ASSEMBLY	E-2	#325	SWITCH ASSEMBLY
A-9	#60	SWITCH ASSEMBLY	E-3	#57	SWITCH ASSEMBLY
B-1	#17	SWITCH ASSEMBLY	E-4	#430-A	SWITCH ASSEMBLY
B-2	#325	SWITCH ASSEMBLY	E-5	#63	SWITCH ASSEMBLY
B-3	#57	SWITCH ASSEMBLY	E-6	#63	SWITCH ASSEMBLY
B-4	#325	SWITCH ASSEMBLY	E-7	#326	SWITCH ASSEMBLY
B-5	#325	SWITCH ASSEMBLY	E-8	#326	SWITCH ASSEMBLY
B-6	#57	SWITCH ASSEMBLY			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

OPERATING RELAYS

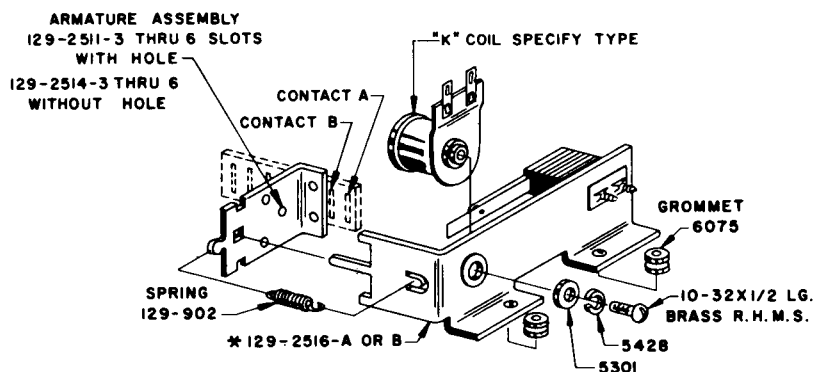

CONTACT SWITCH CODE
M-CONTACT OPEN WHEN COIL IS NOT ENERGIZED
B-CONTACT CLOSED WHEN COIL IS NOT ENERGIZED
T-TRIPLE CONTACT


* 129-2516-A FRAME ASSEMBLY WITH HOLES FOR GROMMETS
129-2516-B FRAME ASSEMBLY WITH HOLES FOR SCREWS

RELAY NAME	COIL NO.	129-2511-3 THRU 6 SLOTS		CONTACT SWITCHES					
		ARMATURE		A	B	C	D	E	F
"A" HOLE RE.	K-28-1200	4 SLOTS		M-27	M-26	M-34	M-26	M-26	
ANTI-CHEAT RE.	K-28-1100	4 SLOTS		M-27	M-26	B-32	B-26	B-26	
BALL INDEX RE.	K-28-1200	3 SLOTS		M-27	M-26				
BONUS COLLECT RE.	K-28-1200	5 SLOTS		M-27	M-26	M-34	M-26	M-48	B-26
COIN CONTROL RE.	K-29-1400	3 SLOTS		M-27	T-31				
COIN RE.	K-28-1200	4 SLOTS		M-27	M-26	M-34	M-26	M-26	
CREDIT RESET RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	T-31		
DOUBLE BONUS RE.	K-29-1400	3 SLOTS		M-27	M-26	B-26			
EXTRA ADVANCE RE.	K-28-1200	3 SLOTS		M-27	M-26	M-26			
EXTRA BALL RE.	K-28-1200	3 SLOTS		M-27	M-26	B-26			
EXTRA LANE RE.	K-28-1200	3 SLOTS		M-27	M-26	T-31			
LOCK RE.	K-29-1600	4 SLOTS		M-27	B-26	M-48	M-48		
OUT HOLE RE.	K-28-1100	4 SLOTS		M-27	T-31	B-32	M-26	T-31	
PLAYER CONTROL RE.	K-28-1200	4 SLOTS		M-27	M-26	M-34	B-26	T-31	
RESET RE.	K-29-1400	3 SLOTS		M-27	B-26				
RIGHT CHUTE RE.	K-28-1200	4 SLOTS		M-27	M-26	B-26	T-31		
SPECIAL LANE RE.	K-28-1200	3 SLOTS		M-27	M-26	T-31			
START RE.	K-28-1100	5 SLOTS		M-27	T-31	M-34	M-48	T-31	B-48
"S" HOLE RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	M-26		
"T" & "R" HOLE RE.	K-28-1200	4 SLOTS		M-27	M-26	M-34	M-26	M-26	
TILT RE.	K-28-1200	4 SLOTS		M-27	M-26	M-26	B-48		

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

OPERATING RELAYS

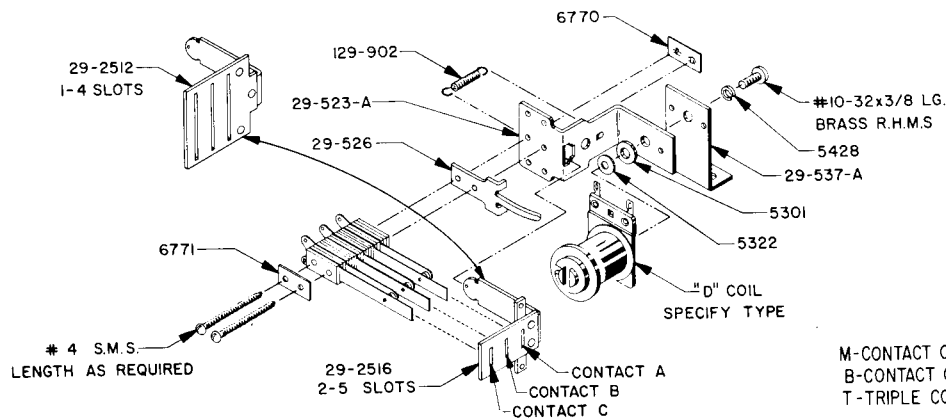


CONTACT SWITCH CODE
M-CONTACT OPEN WHEN COIL IS NOT ENERGIZED
B-CONTACT CLOSED WHEN COIL IS NOT ENERGIZED
T-TRIPLE CONTACT

RELAY NAME	COIL NO.	ARMATURE	
10-90 RE.	D-27-1000	29-2516-4	ALL CONTACT SWITCHES M-28
100-900 RE.	D-27-1000	29-2516-5	ALL CONTACT SWITCHES M-28
1000-9000 RE.	D-27-1000	29-2516-5	ALL CONTACT SWITCHES M-28
SCORE RESET RE. #1	D-28-800	29-2512-3	ALL CONTACT SWITCHES M-27
SCORE RESET RE. #2	D-28-800	29-2512-3	ALL CONTACT SWITCHES M-27

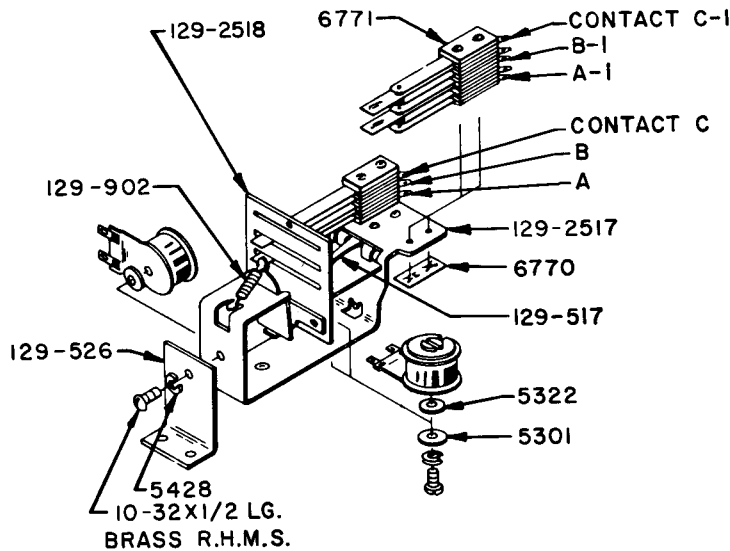


RELAY NAME	COIL NO.	ARMATURE	A	A-1	CONTACT SWITCHES			
					B	B-1	C	C-1
GAME OVER RE.	L-29-700	129-2518-3	M-357-A	T-356-A	B-357	B-357	B-357	T-356


CHICAGO DYNAMIC INDUSTRIES
PARTS CATALOG

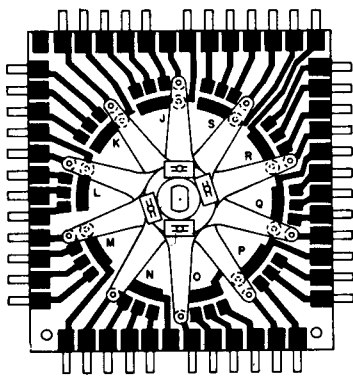


PLAYER CONTROL UNIT
PLATE ASS'Y. 456-2506
FINGER ASS'Y. 456-2507

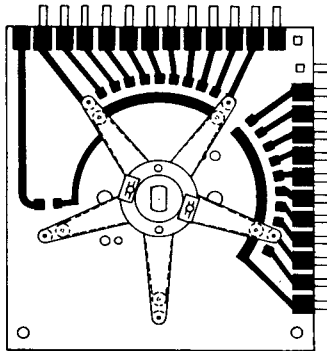


00-90 UNIT
PLATE ASS'Y. 344-2515-L
FINGER ASS'Y. 344-2506

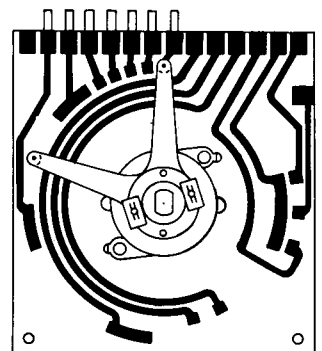


BALL COUNT UNIT
PLATE ASS'Y. 347-2513-D
FINGER ASS'Y. 465-2501

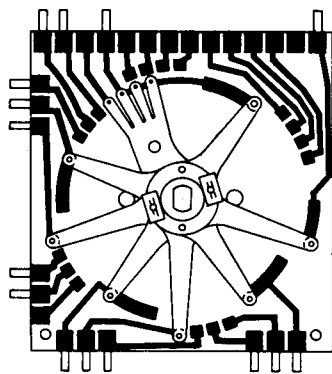

COIN UNIT
PLATE ASS'Y. 456-2503
FINGER ASS'Y. 456-2502

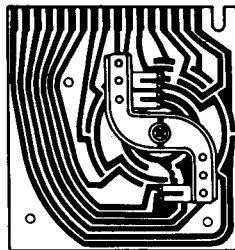


SCORING DRUM
P.C. BOARD 503E-507
WIPER FINGER ASS'Y. 503-2505

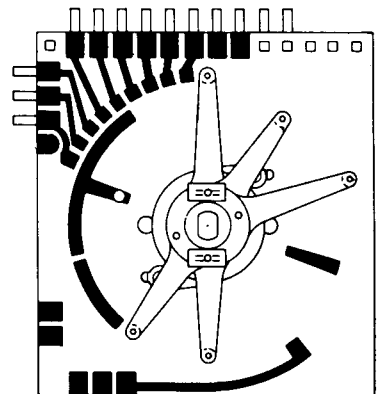


BONUS UNIT
PLATE 373-2510-E
FINGER 431-2501


RIGHT FLIPPER BUTTON & CREDIT BUTTON ASSEMBLY.

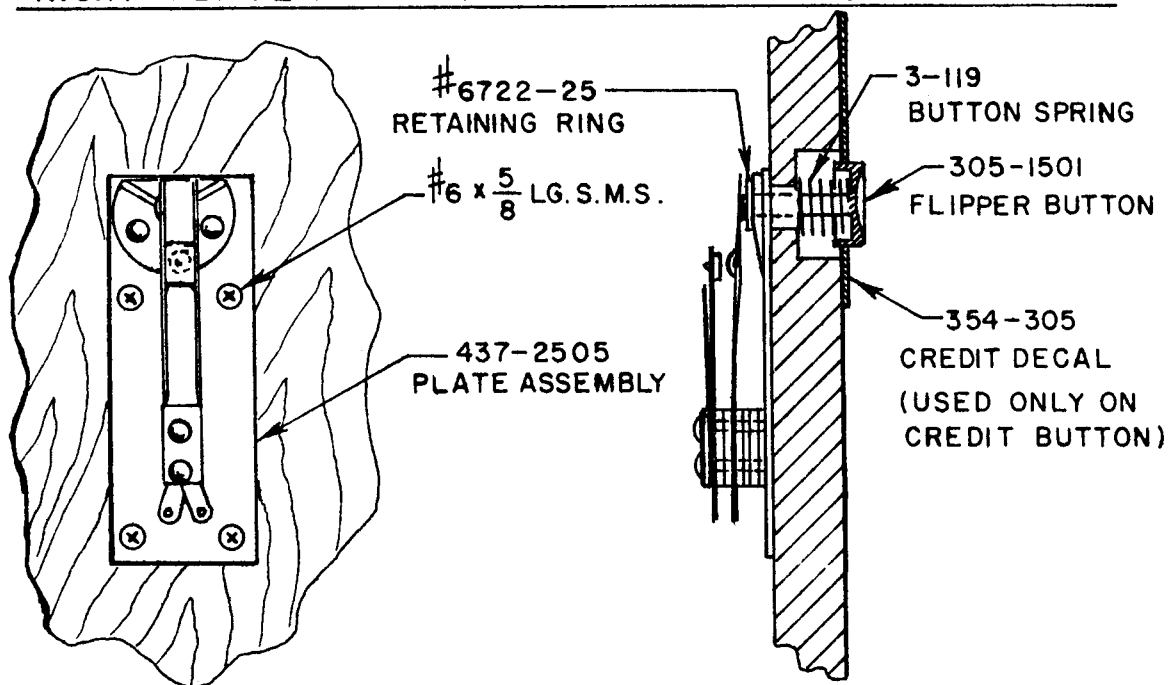

LEFT FLIPPER BUTTON ASSEMBLY.

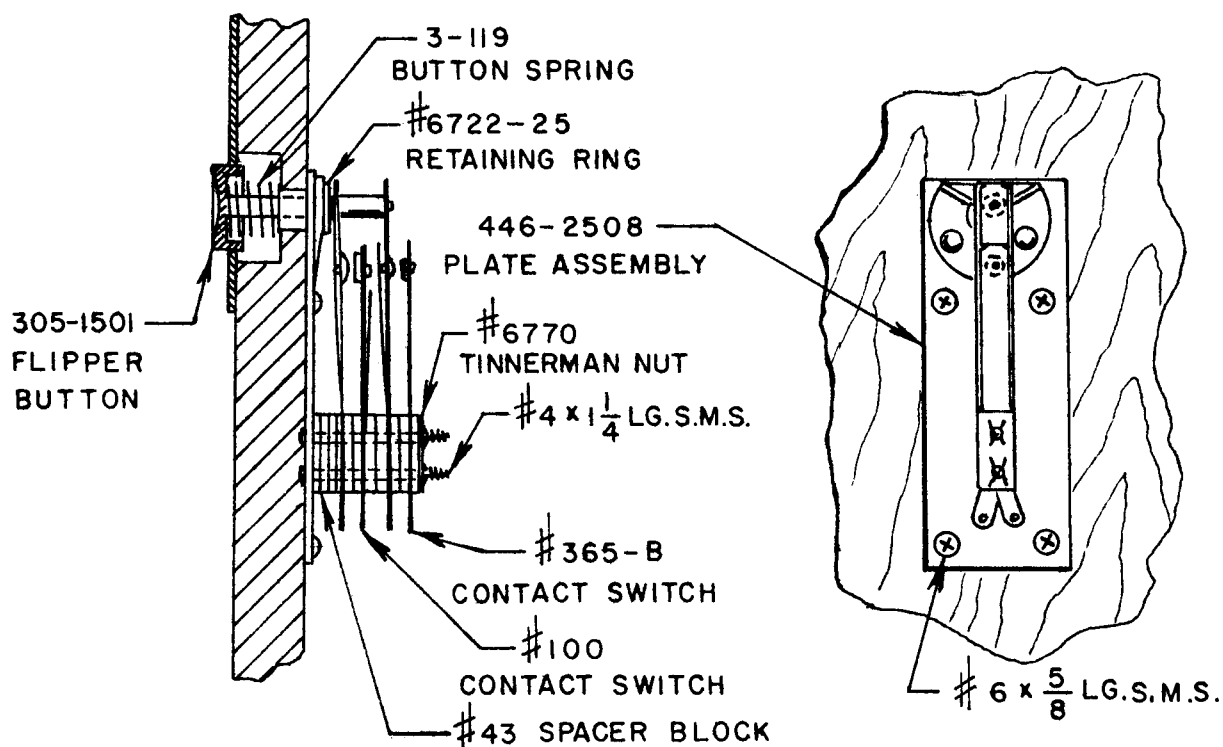

COIN DENOMINATION WINDOWS

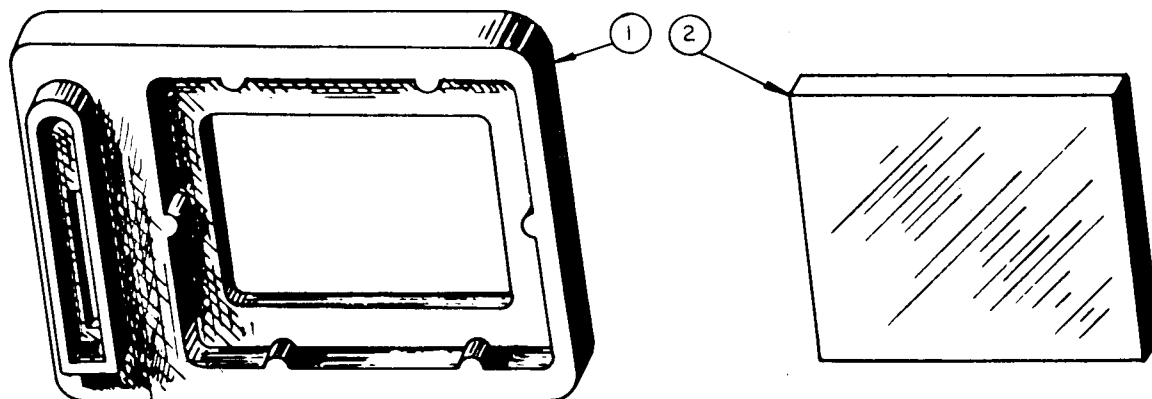


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	382-800-A	5¢ COIN ENTRY MOLDING	2	326-306-M	(2 D.M. - 5 PLAYS) (GERMAN)
	382-800-B	10¢ COIN ENTRY MOLDING		326-306-N	(1 D.M. - 2 PLAYER) (GERMAN)
	382-800-C	25¢ COIN ENTRY MOLDING		326-306-O	(2 D.M. - 4 PLAYER) (GERMAN)
	382-800-F	FOREIGN COIN ENTRY MOLDING (SPECIFY COIN OPENING)		326-306-P	(50 PFENNING) (GERMAN)
2	326-305-A	COIN DENOMINATION WINDOWS (2 NICKELS - 1 PLAY)		326-306-Q	(1 D.M.) (GERMAN)
	326-305-B	(10¢ - 1 PLAY)		326-306-R	(2 D.M.) (GERMAN)
	326-305-C	(25¢ - 3 PLAYS)		326-307-A	(50 LIRE - 1 PLAY) (ITALY)
	326-305-D	(5¢ - 1 PLAY)		326-307-B	(100 LIRE - 2 PLAYS) (ITALY)
	326-305-E	(25¢ - 5 PLAYS)		326-307-C	(100 LIRE - 1 PLAY) (ITALY)
	326-305-F	(25¢ - 6 PLAYS)		326-307-D	(100 LIRE - 3 PLAYS) (ITALY)
	326-305-G	(10¢ - 2 PLAYS)		326-307-E	(100 LIRE - 2 PLAYERS) (ITALY)
	326-305-H	(3 NICKELS - 1 PLAY)		326-308-A	(2 x 25 ORE - 1 PLAY) (SWEDISH OR DENMARK)
	326-305-J	(1 DIME & 1 NICKEL - 1 PLAY)		326-308-B	(1 KRONE - 3 PLAYS) (SWEDISH OR DENMARK)
	326-305-K	(1 QUARTER - 2 PLAYS)		326-308-C	(50 ORE - 1 PLAY) (SWEDISH OR DENMARK)
	326-305-L	(25¢ - 2 PLAYERS)		326-308-D	(1 KRONE - 2 PLAYERS) (DENMARK)
	326-305-M	(2 DIMES - 2 PLAYERS)		326-309-A	(2 x 10 YEN - 1 PLAY) (JAPANESE)
	326-305-O	(10¢ - 1 PERIOD)		326-309-B	(50 YEN - 3 PLAYS) (JAPANESE)
	326-305-P	(25¢ - 3 PERIODS)		326-309-C	(50 YEN - 1 PLAY) (JAPANESE)
	326-305-Q	(25¢ - 1 PLAY)		326-309-D	(100 YEN - 3 PLAYS) (JAPANESE)
	326-305-R	(25¢)		326-309-E	(3 x 10 YEN - 1 PLAY) (JAPANESE)
	326-305-S	(25¢ - 4 PLAYS)		326-309-F	(50 YEN - 2 PLAYS) (JAPANESE)
	326-305-T	(1 QUARTER - 1 PLAY)		326-310-A	(1/2 FRANC - 1 PLAY) (FRENCH)
	326-305-U	(A GAME OF SKILL)		326-310-B	(1 FRANC - 3 PLAYS) (FRENCH)
	326-305-V	(1 QUARTER EACH PLAYER)		326-310-C	(1 FRANC - 4 PLAYS) (FRENCH)
	326-305-W	(1 DIME EACH PLAYER)		326-310-D	(1 FRANC - 1 PLAY) (FRENCH)
	326-305-X	(QUARTER)		326-310-E	(2-20 CENTIMES - 1 PLAY) (FRENCH)
	326-306-A	(2 x 10 PFENNING - 1 PLAY) (GERMAN)		326-310-F	(100 FRANC - 1 PLAY) (FRENCH)
	326-306-B	(50 PFENNING - 3 PLAYS) (GERMAN)		326-310-G	(50 CENTIMES - 1 PLAY) (FRENCH)
	326-306-C	(1 D.M. - 6 PLAYS) (GERMAN)		326-310-H	(1 FRANC - 2 PLAYS) (FRENCH)
	326-306-D	(50 PFENNING - 1 PLAY) (GERMAN)		326-310-I	(5 FRANCS - 1 PLAY) (FRENCH)
	326-306-E	(50 PFENNING - 2 PLAYS) (GERMAN)		326-310-J	(50 CENTIMES - 2 PLAYS) (FRENCH)
	326-306-F	(1 D.M. - 4 PLAYS) (GERMAN)		326-310-K	(1 FRANC - 5 PLAYS) (FRENCH)
	326-306-G	(1 D.M. - 5 PLAYS) (GERMAN)		326-310-L	(10 FRANCS - 2 PLAYS) (FRENCH)
	326-306-H	(2 D.M. - 10 PLAYS) (GERMAN)		326-310-M	(2 x 1 FRANC - 1 PLAY) (FRENCH)
	326-306-I	(2 D.M. - 11 PLAYS) (GERMAN)		326-310-N	(2 x 5 FRANCS - 1 PLAY) (FRENCH)
	326-306-J	(2 D.M. - 12 PLAYS) (GERMAN)		326-310-O	(1 FRANC - 2 PLAYERS) (FRENCH)
	326-306-K	(1 D.M. - 2 PLAYS) (GERMAN)		326-310-P	(1/2 FRANC - 2 PLAYERS) (FRENCH)
	326-306-L	(1 D.M. - 1 PLAY) (GERMAN)		326-310-Q	(2 x 5 FRANCS - 2 PLAYERS) (FRENCH)
				326-310-R	(10 FRANC - 1 PLAY) (FRENCH)
				326-311-A	(6d - 1 PLAY) (BRITISH)

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

COIN DENOMINATION WINDOWS

<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
326-311-B	(ONE SHILLING - 1 PLAY) (BRITISH)	326-315-A	(1 KRONA - 1 PLAY) (SWEDEN)
326-311-C	(TWO SHILLINGS - 2 PLAYS) (BRITISH)	326-315-B	(1 KRONA - 2 PLAYERS) (SWEDISH)
326-311-D	(TWO SHILLINGS - 4 PLAYS) (BRITISH)	326-316-A	(1 MARKKA - 1 PLAY) (FINLAND)
326-311-E	(ONE SHILLING - 3 PLAYS) (BRITISH)	326-317-A	(1 ESCUDO - 1 PLAY) (PORTUGAL)
326-311-F	(TWO SHILLINGS - 1 PLAY) (BRITISH)	326-317-B	(5 ESCUDOS - 2 PLAYERS) (PORTUGAL)
326-311-G	(20 CENTS - 1 PLAY) (BRITISH)	326-318-A	(25 PIASTRES - 1 PLAY) (LEBANON)
326-311-H	(5d - 1 PLAY) (BRITISH)	326-318-B	(50 PIASTRES - 2 PLAYS) (LEBANON)
326-311-I	(5d - 2 PLAYERS) (BRITISH)	326-319-A	(25 CENTIMOS - 1 PLAY) (VENEZUELA)
326-311-J	(10 PENCE - 4 PLAYERS) (BRITISH)	326-320-A	(1 PESO - UN JUEGO) (MEXICO)
326-311-K	(TWO SHILLINGS - 5 PLAYS) (BRITISH)	326-320-B	(2 x 1 PESO - UN JUEGO) (MEXICO)
326-312-A	(1 DINAR - 2 PLAYS) (YUGOSLAVIA)	326-321-A	(2 x 5 PESETAS - 2 PLAYERS) (SPAIN)
326-312-B	(50 PARA - 1 PLAY) (YUGOSLAVIA)	382-301-A	(1 QUARTER - 2 PLAYS)
326-312-C	(1 DINAR - 1 PLAY) (YUGOSLAVIA)	382-301-B	(1 QUARTER - 3 PLAYS)
326-313-A	(1 SPEL - 25¢) (HOLLAND)	382-301-C	(1 DIME & 1 NICKEL - 1 PLAY)
326-313-B	(1 GULDEN) (4 SPELEN) (HOLLAND)	382-301-D	(3 NICKELS - 1 PLAY)
326-313-C	(1 GULDEN - 2 SPELER) (HOLLAND)	382-301-E	(10¢ - 1 PLAY)
326-314-A	(2 x 1 SCHILLING - 1 PLAY) (AUSTRIA)	382-301-F	(2 NICKELS - 1 PLAY)
326-314 B	(5 SCHILLINGS - 3 PLAYS) (AUSTRIA)		

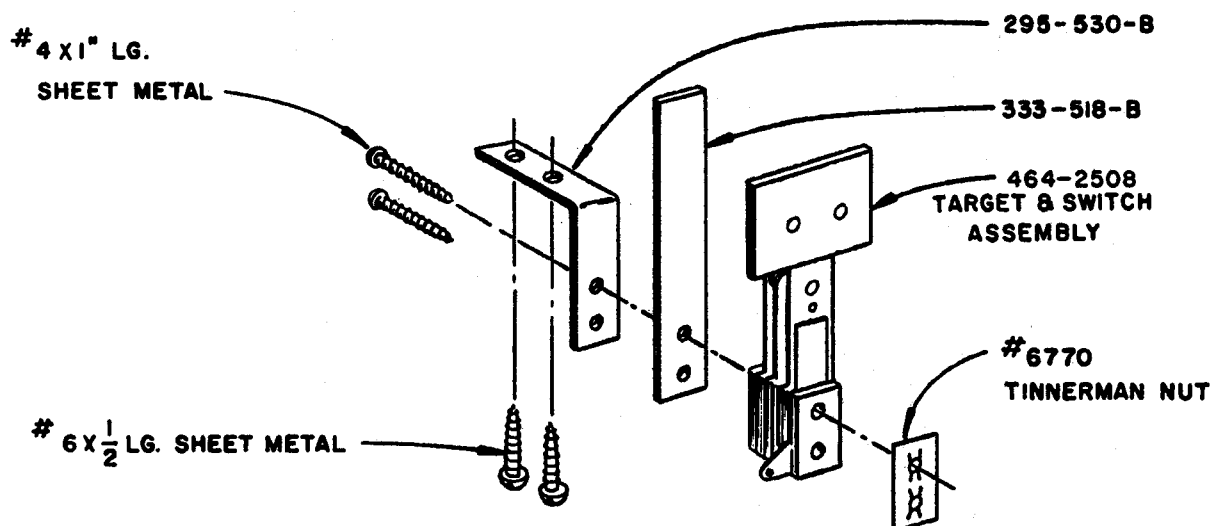

5 BALLS PER GAME

143,000 – 1 REPLAY

159,000 – 1 REPLAY

181,000 – 1 REPLAY

5 BALLS PER GAME

151,000 – 1 ADDED BALL

179,000 – 1 ADDED BALL

198,000 – 1 ADDED BALL

1. ROLL OVER BUTTONS ADVANCE BONUS TO POSSIBLE 19,000.
 2. HIT S-T-A-R TARGETS TO LITE BUTTONS ON HOLE VALUE PANEL.
 3. HIT ACTION HOLES TO LITE FEATURES AS INDICATED ON HOLE VALUE PANEL.
 4. SPECIAL LANE SCORES ONE EXTRA BALL WHEN LIT.
 5. EXTRA LANE SCORES ONE EXTRA BALL WHEN LIT.
 6. TILT DISQUALIFIES BALL IN PLAY ONLY.
-