

CHICAGO

GOIN

RODEO

SHOOTING GALLERY

(MODEL 404)

PARTS CATALOG

CHICAGO DYNAMIC INDUSTRIES, INC.

1725 DIVERSEY BOULEVARD CHICAGO, ILLINOIS 60614 PHONE (312) 935-4600

INTRODUCTION

THIS PARTS CATALOGUE HAS BEEN COMPILED TO HELP THE SERVICEMAN IN SELECTING THE PARTS NECESSARY FOR PROPER MAINTENANCE OF CHICAGO COIN GAMES.

ALL MOTORS IN NEW CHICAGO COIN GAMES CARRY A 6 MONTHS WARRANTY FROM DATE OF PURCHASE OF MACHINE.


ANY DEFECTIVE MOTOR WILL BE REPLACED FREE OF CHARGE BY YOUR CHICAGO COIN DISTRIBUTOR.

WHEN ORDERING PARTS ALWAYS SPECIFY NAME OF UNIT, PART NUMBERS AND A DESCRIPTION OF THE PART AS SHOWN IN THIS CATALOGUE.

GAME ADJ.

PLACE THE PLUG IN THE
"REPLAY" POSITION TO
GIVE THE PLAYER ONE
REPLAY FOR HI-SCORE.

PLACE THE PLUG IN THE
"EXTENDED PLAY" POSITION
TO GIVE THE PLAYER AN
EXTENDED PLAY FOR HI-SCORE.



LOCATED - TOP LEFT
CORNER OR BACKRACK

GAME ADJ

REPLAY

EXTENDED
PLAY

LOCATED - LEFT SIDE
OF BACKRACK

HI-SCORE
ADJ.

PLUGS

SOCKET

(1100 TO 2000)

YEL

000- ☐ ☐ -500

(2100 TO 3000)

RED

900- ☐ ☐ -400

(3100 TO 4000)

BRN

800- ☐ ☐ -300700- ☐ ☐ -200600- ☐ ☐ -100

PLACE THE PLUG
IN THE SCORE
THAT YOU WISH
TO AWARD A REPLAY
OR EXTENDED PLAY
WHEN THE PLAYER
REACHES THAT
SCORE.

EXAMPLES:

YELLOW WIRE INTO 400 POS. SCORES AT 1400.

RED WIRE INTO 800 POS. SCORES AT 2800.

BROWN WIRE INTO 200 POS. SCORES AT 3200.



USE ONE PLUG ONLY.

MISS SHOT ADJUSTMENTS

THERE ARE NONE IN "REG."
POSITION.

THERE IS A POSSIBILITY
OF ONE IN "LESS" POSITION.


THERE IS A POSSIBILITY
OF TWO IN THE "MORE"
POSITION.

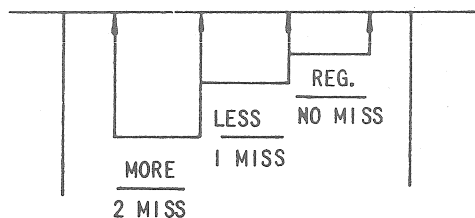MISS SHOT ADJUSTMENTS


LOCATED ON BACK-DOOR
TOP RIGHT CORNER.

EXTENDED PLAY
SHOT ADJ

LOCATED ON
LEFT SIDE
OF BACKRACK

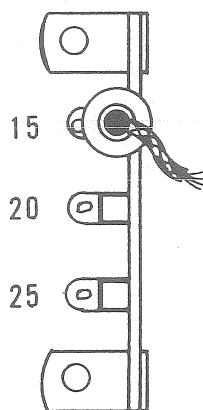


15 SHOTS PER EXTENDED
PLAY WHEN PLUG IS IN
THIS POSITION.

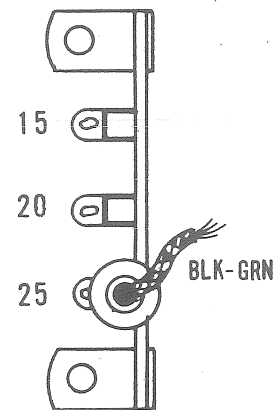GAME OVER
SHOT ADJ.


25 SHOTS PER GAME
WHEN PLUG IS IN THIS
POSITION.

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

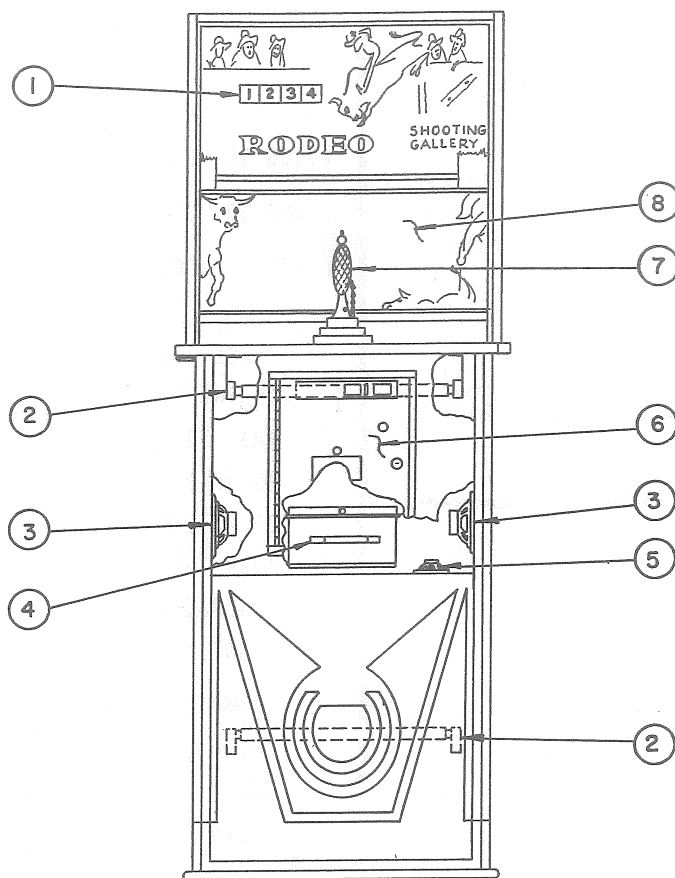


ITEM	PART NO.	DESCRIPTION
1	500-2565-A	SCORING DRUM UNIT (SEE PAGES 14 & 15)
2	318-500	FLUORESCENT SOCKET MTG. BRACKET
	#5130	BLACK LITE FLUORESCENT LAMP (18" LONG)
	#5239	FLUORESCENT SOCKET
	#5726	BALLAST
	#5728	STARTER HOLDER
	#5729	FS-2 STARTER
	278-538	ASBESTOS PAD
3	378-312	5" SPEAKER (USED ONLY WITH 8 TRACK TAPE PLAYER)
4	326-540	CASH BOX
	339-508-B&C	CASH BOX COVER
	326-542	CASH BOX SEPARATOR
5	404-311	2-1/2" SPEAKER
6		CASH COMPARTMENT (SEE PAGES 4 & 5)
7		RIFLE ASSEMBLY (SEE PAGES 8 & 9)
8	404-350-G	SCORE GLASS

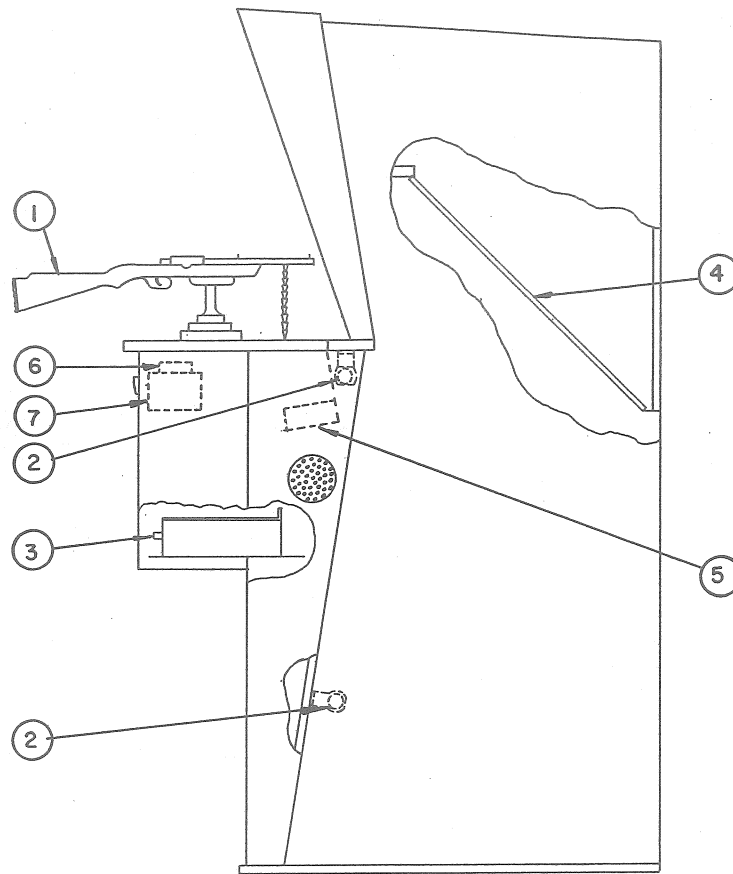


ITEM	PART NO.	DESCRIPTION
1		RIFLE ASSEMBLY (SEE PAGES 8 & 9)
2		FLUORESCENT LITE
3	326-540	CASH BOX
	326-542	CASH BOX SEPARATOR
	339-508-B-C	CASH BOX COVER
4	360-310	MIRROR
5	404-303	BULLSEYE (PLEXIGLAS)
	392-525-E	BULLSEYE PLEXIGLAS HOLDER
	404-516	BULLSEYE MTG. BRACKET
6	404-309	8 TRACK STERO CARTRIDGE
7	404-310	8 TRACK STERO PLAYER (SEE PAGE (2) FOR SPEAKERS REQ'D WITH THIS UNIT)

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

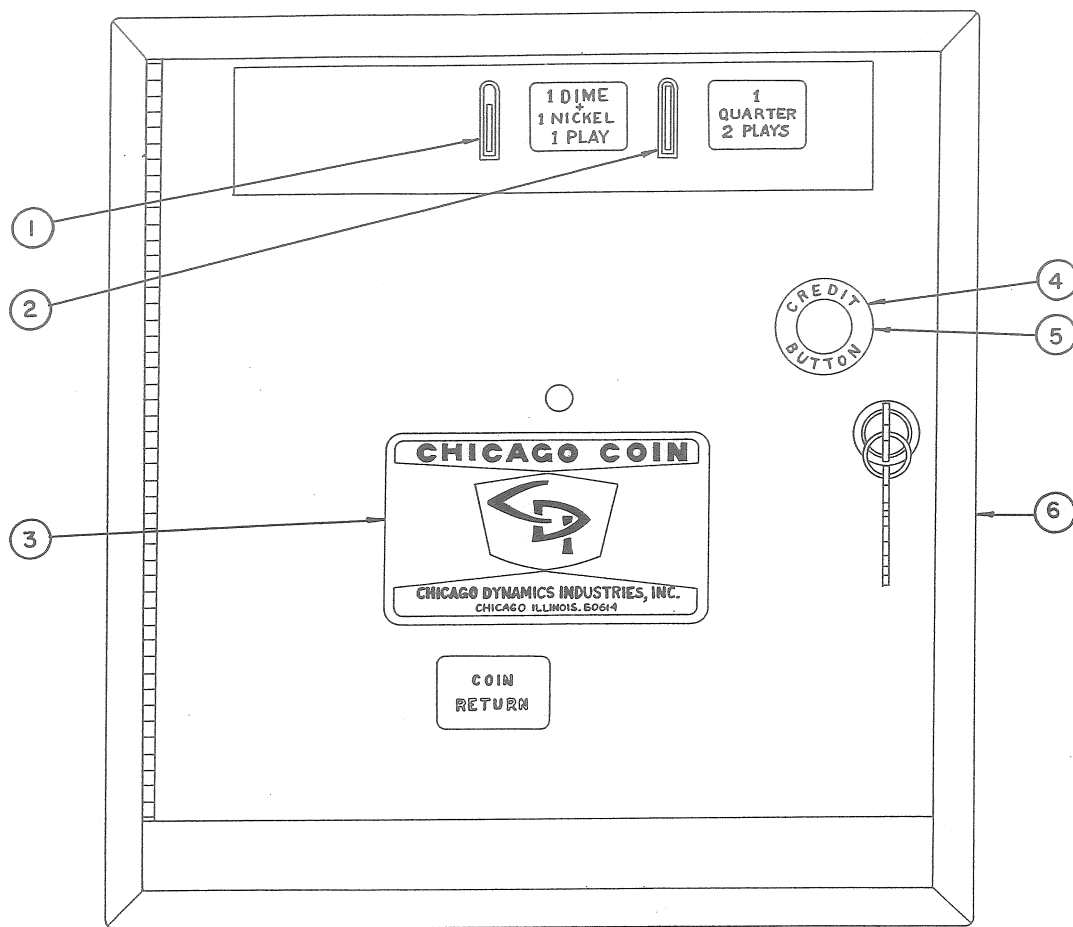


ITEM	PART NO.	DESCRIPTION
1	382-800-B	10¢ COIN ENTRY MOLDING
	382-800-A	5¢ COIN ENTRY MOLDING
	326-305-B	(10¢ - 1 PLAY)
	326-305-J	(1 DIME & 1 NICKEL - 1 PLAY)
	326-305-A	(2 NICKELS - 1 PLAY)
2	382-800-C	25¢ ENTRY MOLDING
	326-305-K	(1 QUARTER - 2 PLAYS)
	326-305-C	(25¢ - 3 PLAYS)
3	#6883	C.D.I. DECAL
4	354-305	CREDIT DECAL
5	382-1500-R	CREDIT BUTTON
6	384-2502	FRONT DOOR FRAME ASS'Y

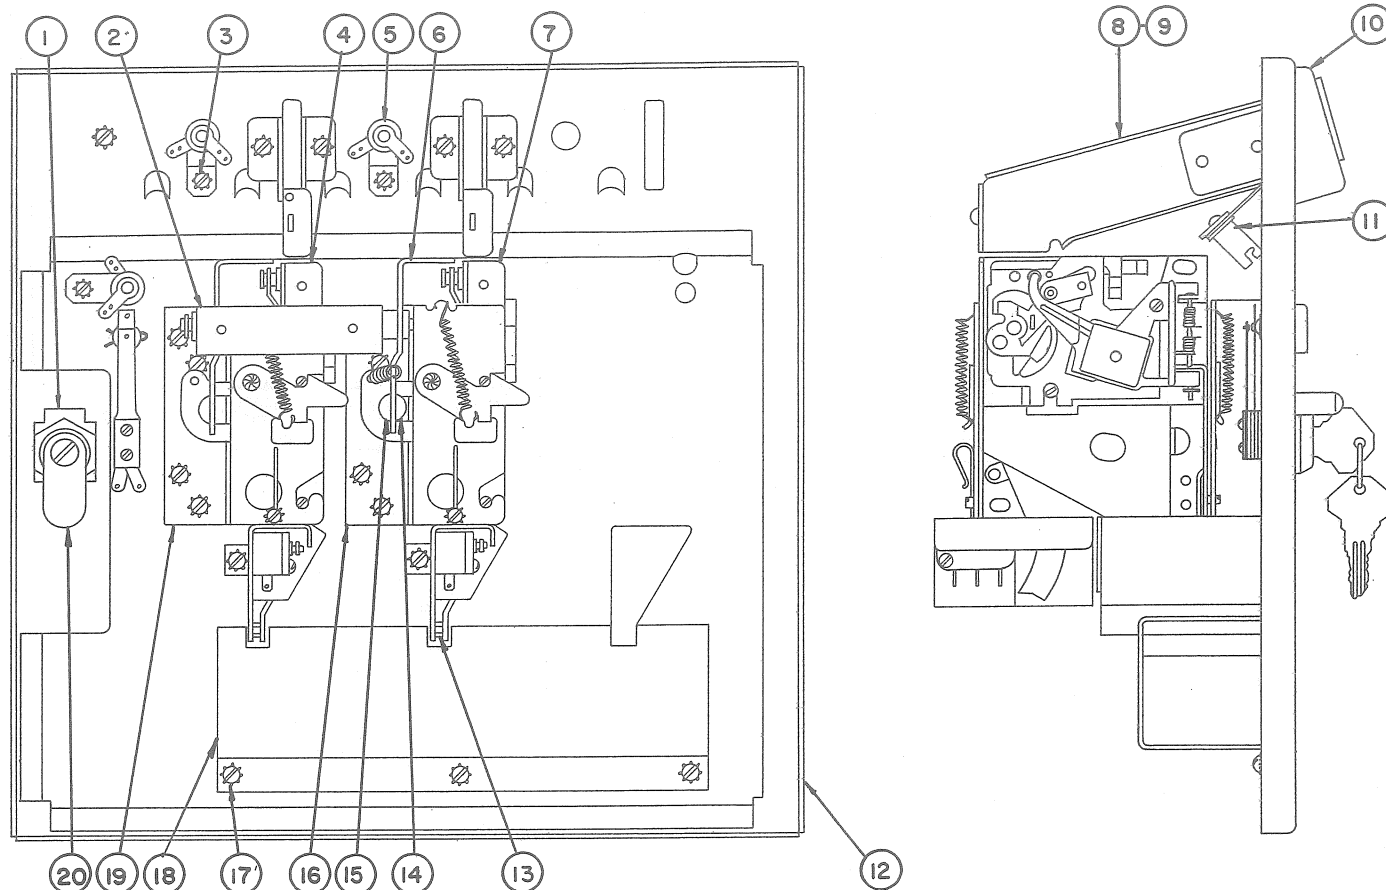


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	246-551	LOCK PLATE	11	#5265	BAYONET SOCKET
2	326-521	REJECTOR BRACKET	12	382-2507-X	FRONT DOOR & CHUTE MTG. BRKT. ASS'Y
3		#6-32 x 1/4 LG. SEMS UNIT	13	333-2528	REJECTED COIN CONCUR FUNNEL ASS'Y
4	#6801-C	25¢ COIN ACCEPTOR INSERT	14	326-1505	REJECTOR ROD
5	#5266	BAYONET SOCKET	15	#6828	RETAINING RING
	#5112	BULB	16	333-2530-B	HOUSING & MICRO SWITCH ASS'Y
6	326-2510	REJECTOR ARM & BUSHING ASS'Y	17		#8-32 x 1/4 LG. SEMS UNIT
	#5303	WASHER	18	326-2527	COIN RETURN HOUSING ASS'Y
	#6737	RETAINING RING	19	333-2530-C	HOUSING & MICRO SWITCH ASS'Y
7	#6801-B	10¢ COIN ACCEPTOR INSERT	20	#6877-A	LOCK CAM
8	382-2501	COIN GUIDE ASSEMBLY		#6719	LOCK
9	382-2502	COIN GUIDE COVER ASS'Y			
10	382-2504-A-B-C	COIN WINDOW BRACKET ASS'Y			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

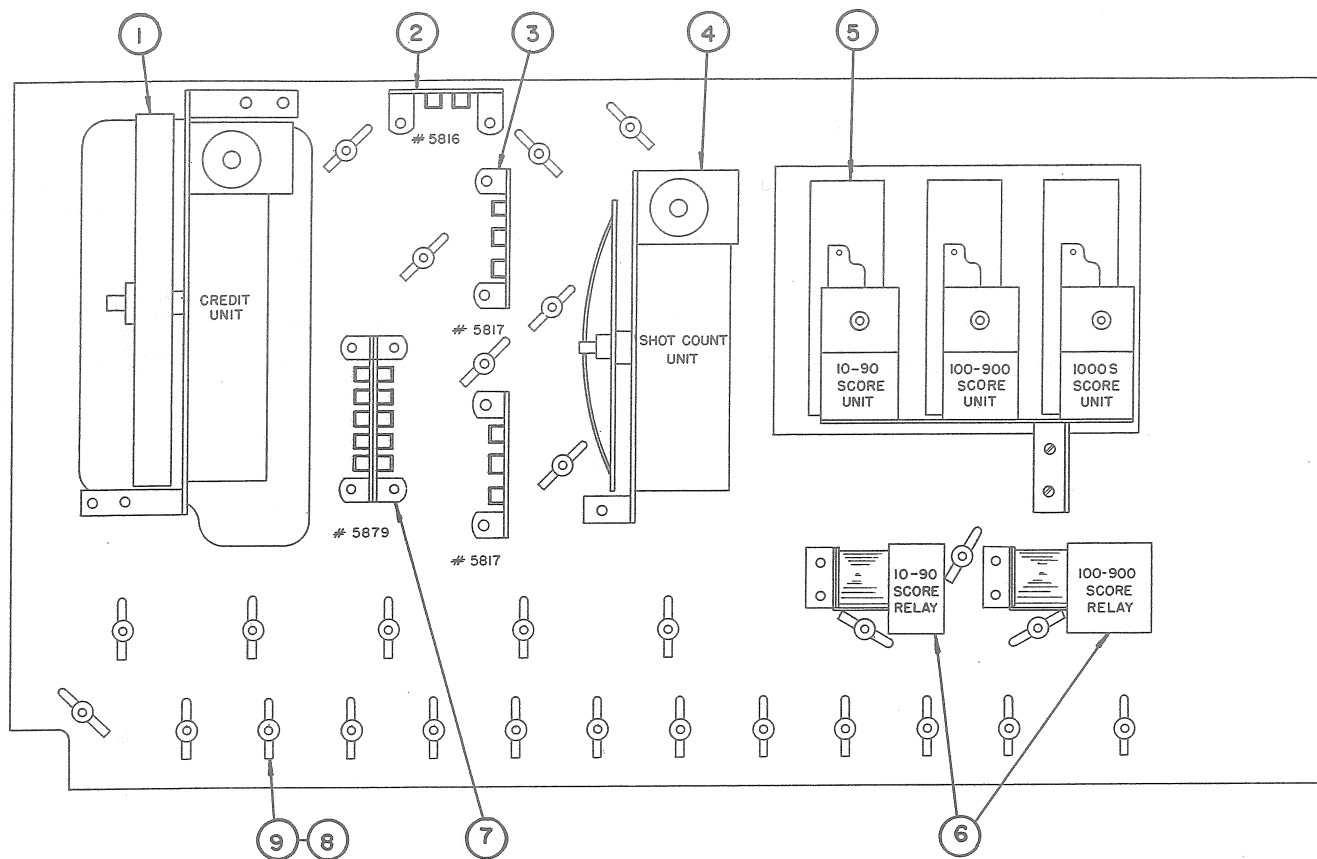


ITEM	PART NO.	DESCRIPTION
1	130-2532-C	COMPLETE REPLAY UNIT (SEE PAGE 19)
2	#5816	2 POINT INLINE SOCKET
3	#5817	3 POINT INLINE SOCKET
4	130-2568-B	COMPLETE SHOT COUNT UNIT (SEE PAGE 18)
5	500-2565-A	COMPLETE SCORING DRUM UNIT (SEE PAGE 14)
6		FOR THESE RELAYS SEE PAGE 22
7	#5879	10 POINT REGULAR SOCKET
8	#5232	BAYONET SOCKETS
9	#5112	#47 BULBS

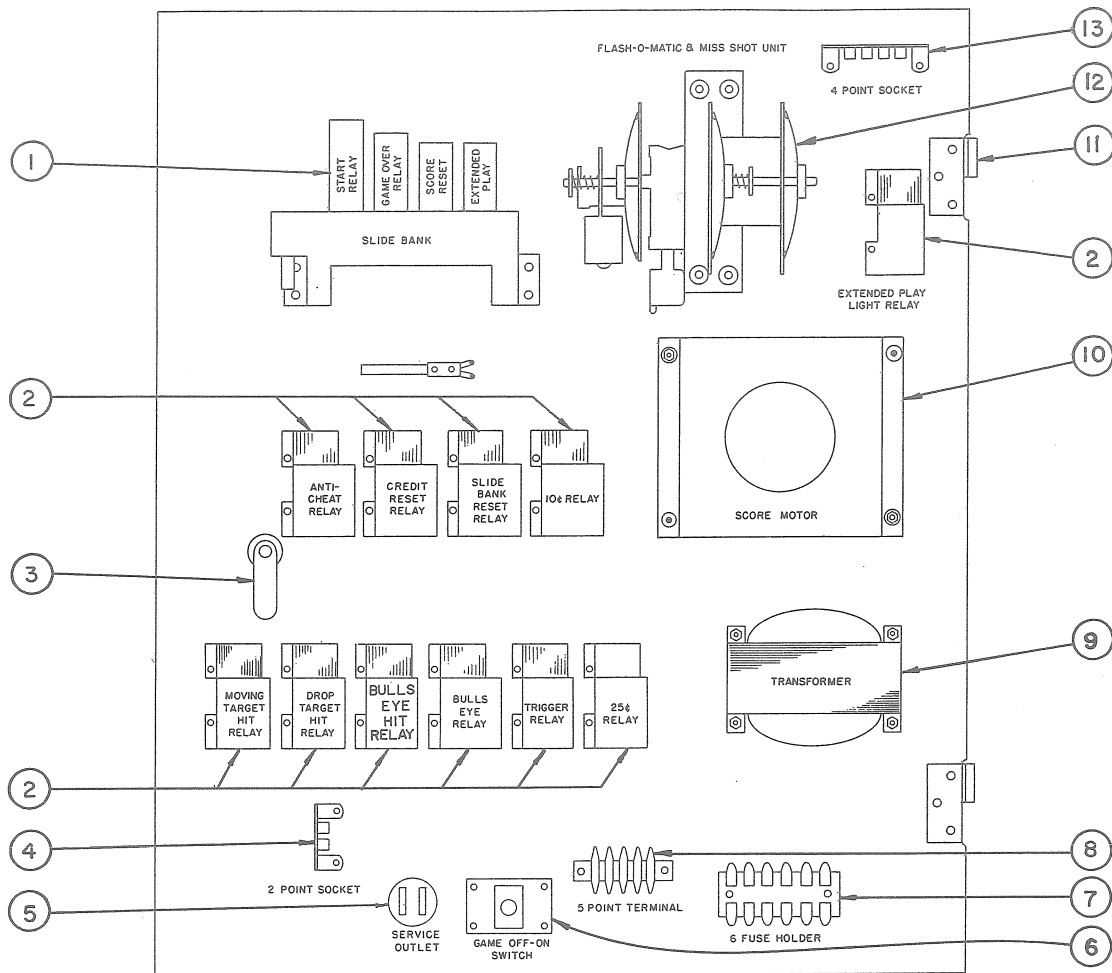

ITEM	PART NO.	DESCRIPTION
1	271-2520-R-4	COMPLETE SLIDE TYPE RELAY (SEE PAGE 16)
2		FOR ALL THESE RELAYS SEE PAGE 21
3	#6719	LOCK
	#6877-A	LOCK CAM
4	#5816	2 POINT INLINE SOCKET
5	#5701	SERVICE OUTLET
6	#5700	TOGGLE SWITCH
	231-573	TOGGLE SWITCH MTG. PLATE
7	#5747-6	6 PLACE FUSE HOLDER
8	#6685-5	5 PLACE TERMINAL STRIP
9	#5781	TRANSFORMER
10	404-2500	COMPLETE SCORE MOTOR ASS'Y (SEE PAGE 20)
11	287-512	FEMALE HINGE
12	404-2509	FLASH-O-MATIC & MISS SHOT UNIT (SEE PAGE 17)
13	#5818	4 POINT INLINE SOCKET

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

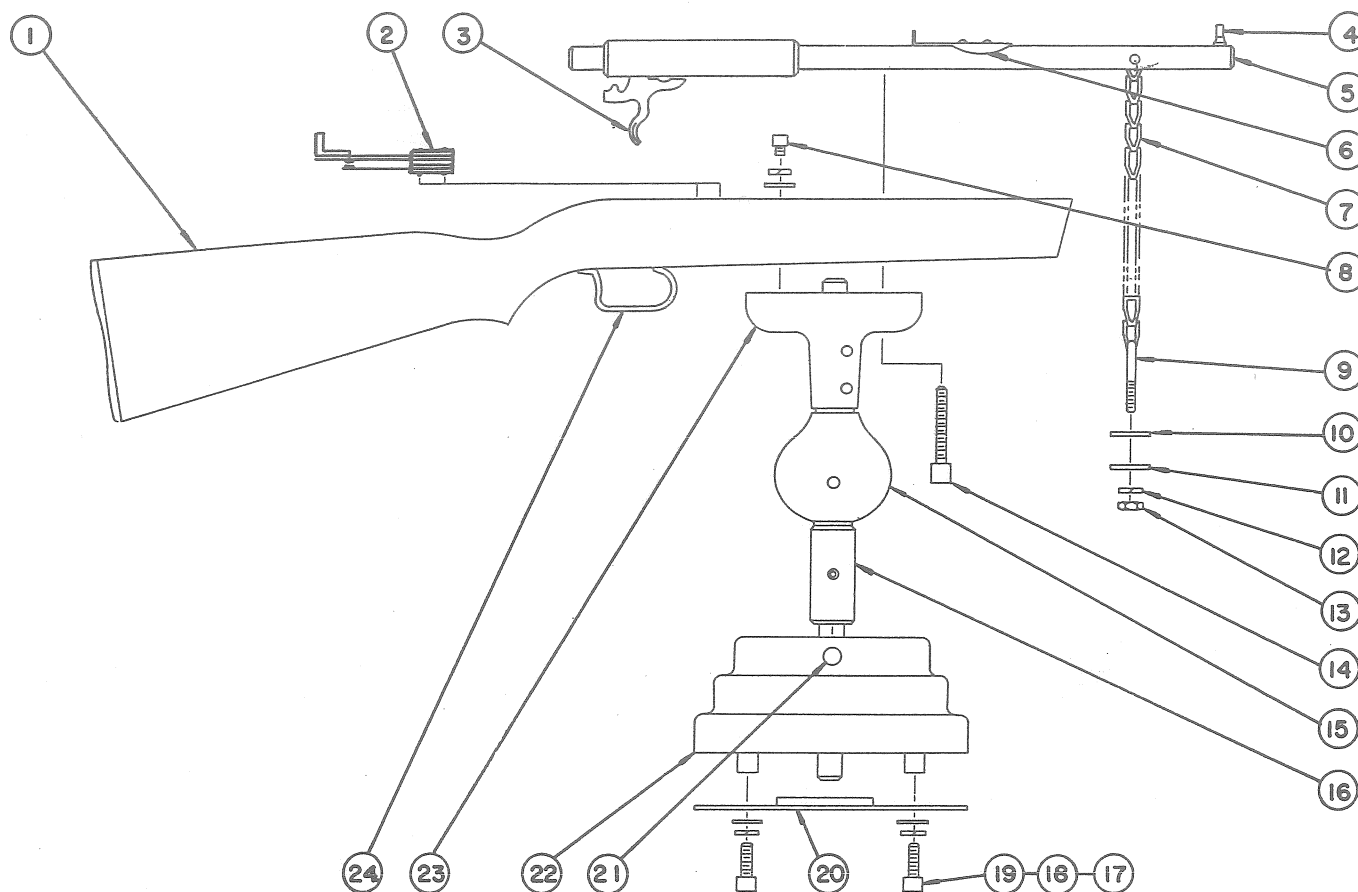


ITEM	PART NO.	DESCRIPTION
------	----------	-------------


1	254-300-A	GUN STOCK
2	#178	SWITCH ASS'Y
3	379-525	TRIGGER
	254-910	TRIGGER SPRING
4	360-1505	FRONT GUN SIGHT
5	392-2548	COMPLETE RIFLE BARREL ASS'Y
6	404-509	REAR GUN SIGHT
		#5-44 x 3/8 LG. ALLEN HD. M.S.
7	277-310-F	GUN CHAIN
8		1/4-20 x 1" LG. SOCKET HD. CAP SCREW
	#5479	EXTERNAL SHAKEPROOF L/W
	#5329	PLAIN WASHER
9	254-312	"U" BOLT
10	277-534	"U" BOLT PLATE

ITEM	PART NO.	DESCRIPTION
------	----------	-------------


11	#5382	PLAIN WASHER
12	#5429	LOCKWASHER
13		1/4-20 HEX NUT
14		1/4-20 x 2" LG. SOCKET HD. CAP SCREW
15	360-2504	MOUNTING SOCKET ASS'Y
16	360-1502	RIFLE HOLDING COLLAR
17		1/4-20 x 3/4 LG. SOCKET HD. CAP SCREW
18	#5429	LOCKWASHER
19	#5376	PLAIN WASHER
20	360-502	RIFLE STOP BRACKET
21	360-2507	TAPERED SET SCREW
22	277-801-F	RIFLE SWIVEL BASE
23	360-2506	RIFLE MTG. CASTING ASS'Y
24	404-511	TRIGGER GUARD

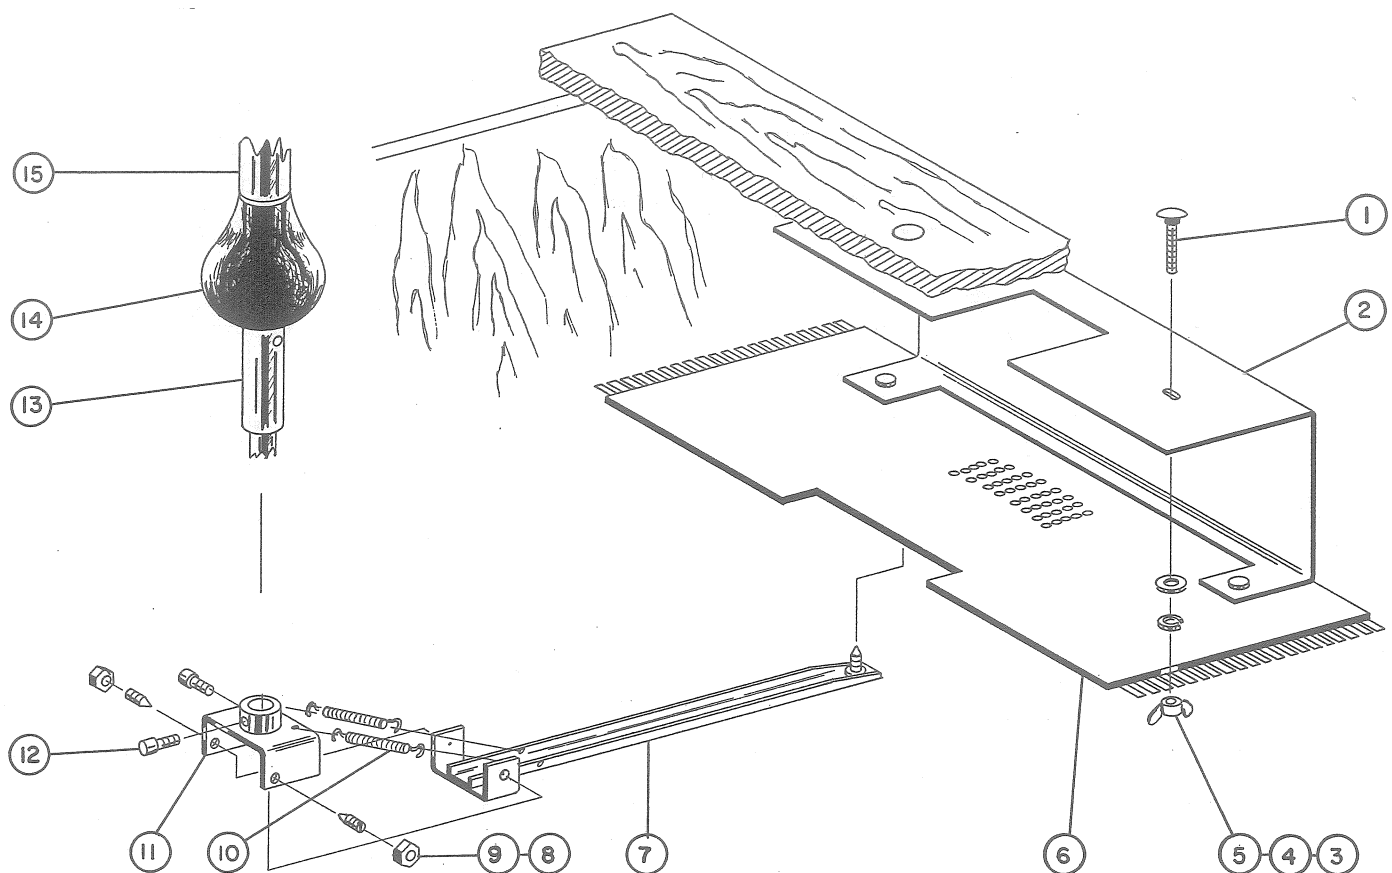

ITEM	PART NO.	DESCRIPTION
1		1/4-20 x 1-1/4 LG. CARRIAGE BOLT
2	360-2511	SCANNING DISC MTG. BRKT. ASS'Y
3		1/4-20 WING NUT
4	#5429	LOCKWASHER
5	#5382	WASHER
6	404-2519	SCANNING DISC COMPLETE
7	360-2513	STYLUS CONTACT POINT & ARM ASS'Y
8		5/16-24 HEX NUT
9	254-1507	STYLUS PIVOT SCREW
10	291-900	EXTENSION SPRING
11	360-2509	STYLUS BRACKET & HUB ASS'Y
12		5/16-18 x 1/2 LG. SOCKET HD. SET SCREW
13	360-1502	RIFLE HOLDING COLLAR
14	360-2504	MOUNTING SOCKET ASS'Y
15	360-2506	RIFLE MTG. CASTING ASS'Y (SEE PAGE 8)

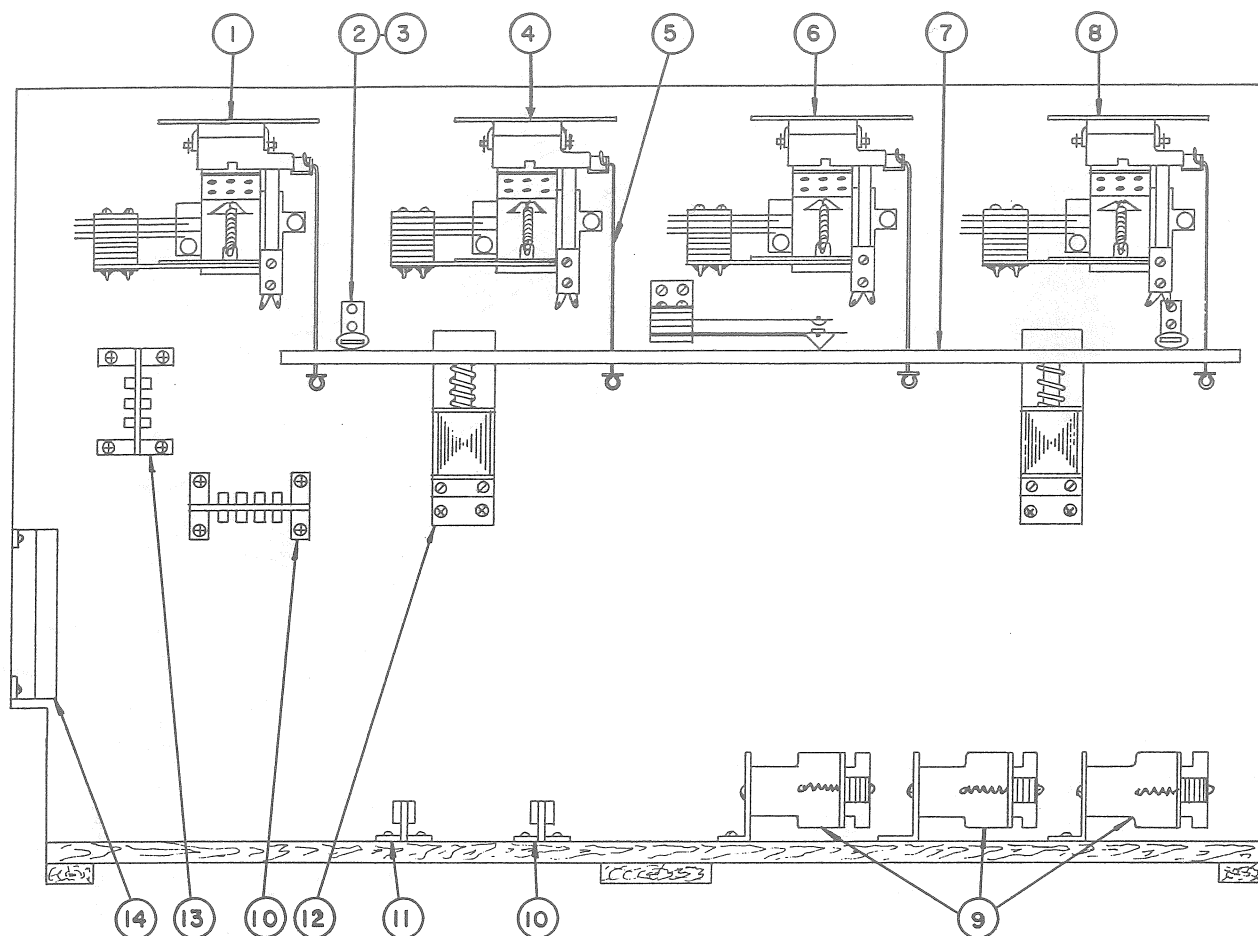



ITEM	PART NO.	DESCRIPTION
1	404-2514-A	COMPLETE TRIP TARGET ASS'Y (SEE PAGE 11)
2	360-518	RESET STOP BRACKET
3	295-300	RUBBER BUSHING
4	404-2514-B	COMPLETE TRIP TARGET (SEE PAGE 11)
5	360-900	TRIP TARGET RESET WIRE FORM
6	404-2514-C	COMPLETE TRIP TARGET (SEE PAGE 11)
7	360-519	TRIP TARGET RESET BAR
8	404-2514-D	COMPLETE TRIP TARGET (SEE PAGE 11)
9		FOR THESE RELAYS SEE PAGE 21
10	#5878	8 POINT REGULAR SOCKET
11	#5880	12 POINT REGULAR SOCKET
12	360-2529	TRIP TARGET RESET COIL ASS'Y
13	#5877	6 POINT REGULAR SOCKET
14	#5886	22 POINT REGULAR SOCKET

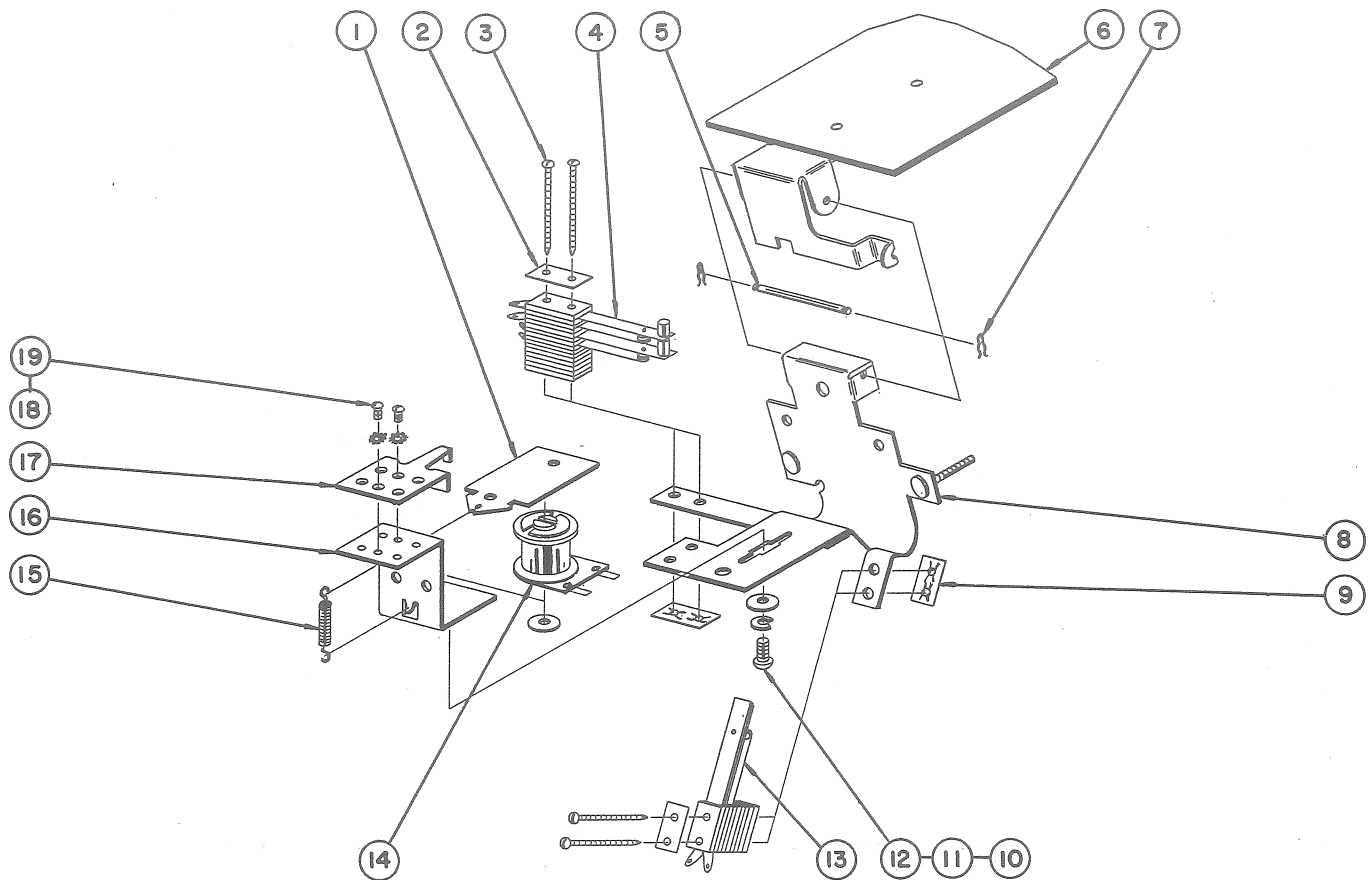


ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	404-2514	TARGET RELAY COMPLETE	9	#6770	TINNERMAN NUT
1	254-531-A	ARMATURE	10		#10-32 x 1/2 LG. BRASS R.H.M.S.
2	#6771	TINNERMAN SPACER	11	#5428	LOCKWASHER
3		#4 S.M.S. LENGTH AS REQUIRED	12	#5301	BRASS WASHER
4	#347-347	SWITCH ASS'Y	13	#26-A	SWITCH ASS'Y
5	254-1506	PIN (TARGET HINGE BRKT.)	14	T-28-700	COIL
6	404-2515-A	TARGET ASS'Y (404-305-A)	15	129-902	SPRING
	404-2515-B	TARGET ASS'Y (404-305-B)	16	254-533-A	RELAY BRACKET
	404-2515-C	TARGET ASS'Y (404-305-C)	17	254-532	ARMATURE STOP
	404-2515-D	TARGET ASS'Y (404-305-D)	18		#5-40 x 3/8 LG. R.H.M.S.
7	206-908	RETAINING SPRING	19	#5476	EXTERNAL SHAKEPROOF L/W
8	392-2501	FRAME & CONTACT BRKT. ASS'Y			

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

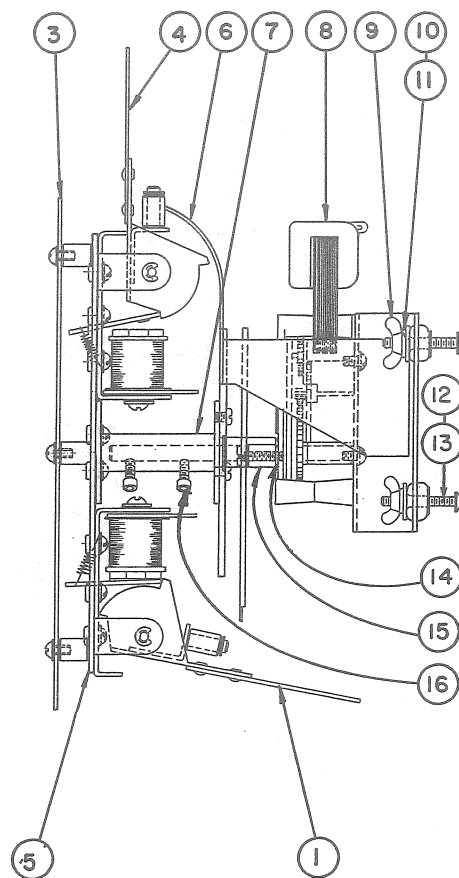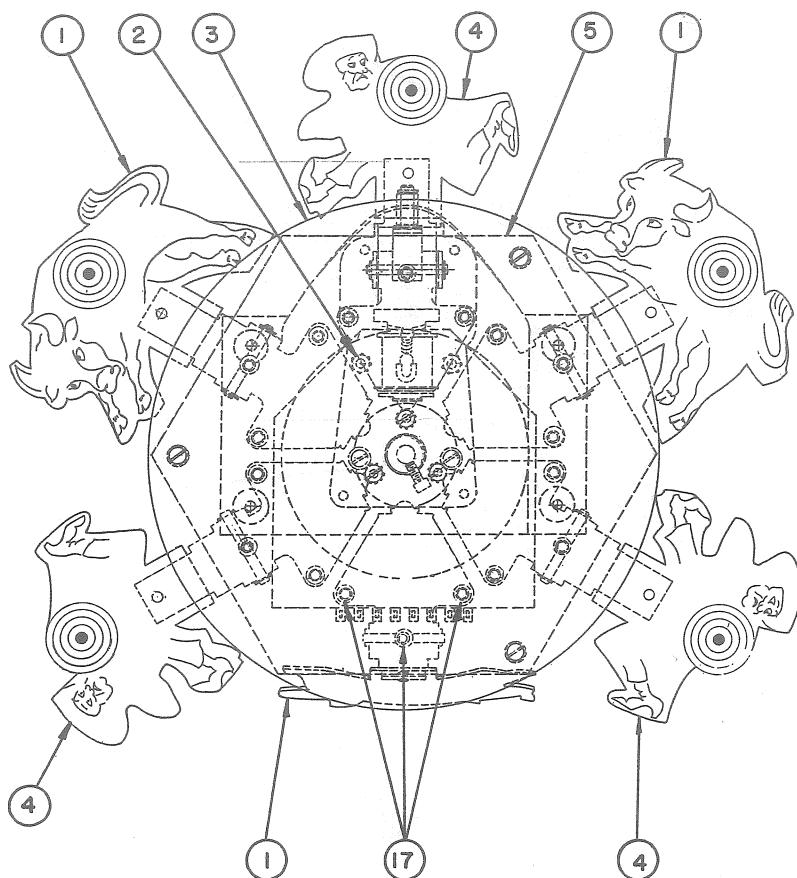


ITEM	PART NO.	DESCRIPTION
	404-2524	CAROUSEL UNIT COMPLETE
1	404-2511-A	CAROUSEL TARGET COMPLETE ASS'Y (SEE PAGE 13)
2		#8-32 x 3/8 LG. SEMS UNIT
3	404-306	CAROUSEL UNIT COVER
4	404-2511-B	CAROUSEL TARGET COMPLETE ASS'Y (SEE PAGE 13)
5	404-2505	TARGET CAROUSEL MTG. PLATE ASS'Y
6	404-2508	MOTOR MTG. BRKT. & TARGET CAM ASS'Y
7	404-2516	CAROUSEL MTG. BUSHING & PLATE ASS'Y
8	#5750-2065	CAROUSEL MOTOR
9		#8-32 WING NUT
10	#5427	SPLIT TYPE LOCKWASHER
11	#5310	FLAT WASHER
12		#8-32 x 1-1/4 LG. CARRIAGE BOLT
13	#6076	RUBBER GROMMET
	#6661	CARR FASTENER
14	#5389	WASHER
15	102-1502	SPACER
16		#8-32 x 3/8 LG. SOCKET HD. SET SCREW
17		#8-32 x 1/4 LG. SEMS UNIT

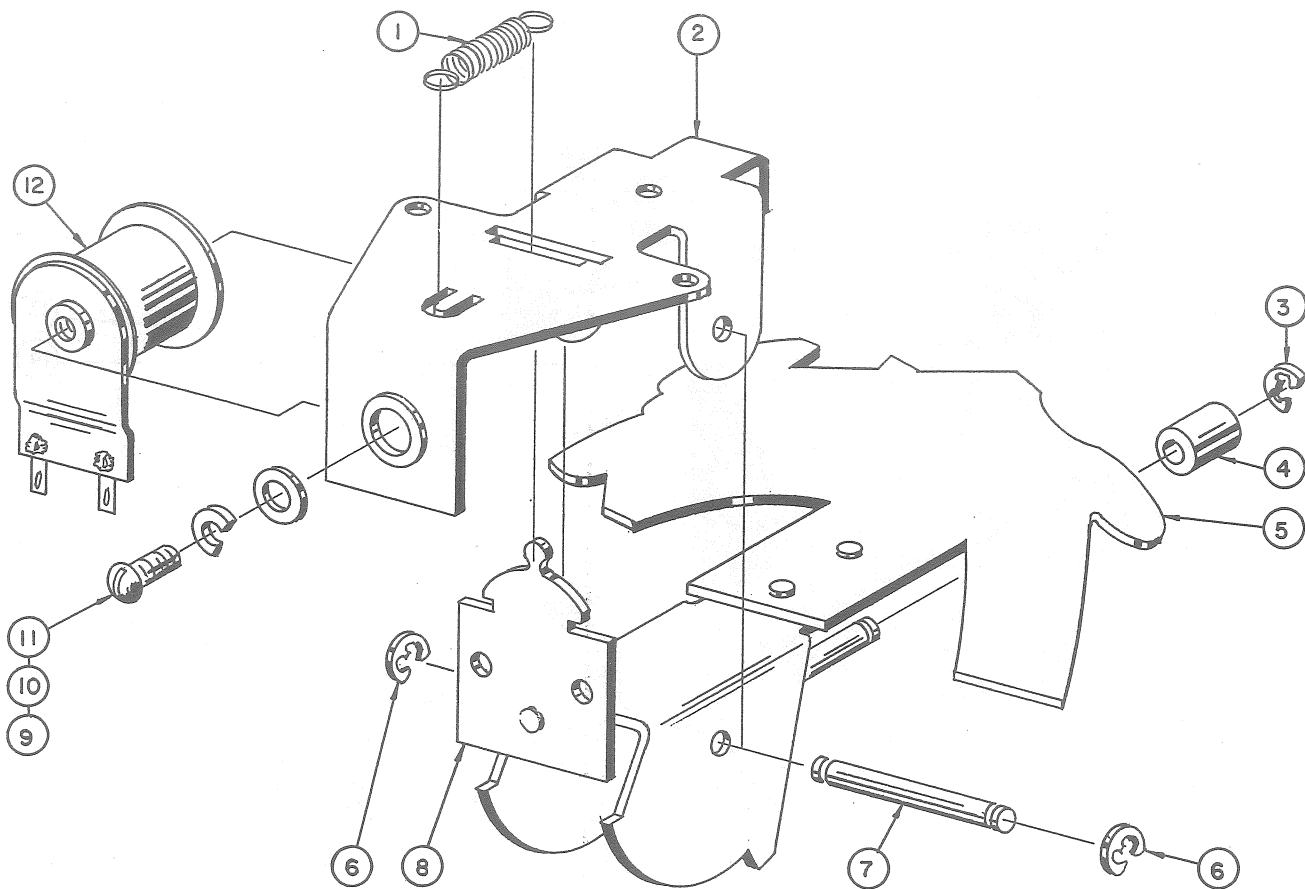

ITEM	PART NO.	DESCRIPTION
	404-2511-A	COMPLETE CAROUSEL TARGET ASS'Y
	404-2511-B	COMPLETE CAROUSEL TARGET ASS'Y
1	129-902	ARMATURE SPRING
2	404-2501	TRIP COIL MTG. FRAME & EYELET ASS'Y
3	#6737	RETAINING RING
4	404-1500	TARGET RESET ROLLER
5	404-2510-A	CAROUSEL TARGET & STUD ASS'Y
	404-2510-B	CAROUSEL TARGET & STUD ASS'Y
6	#6736	RETAINING RING
7	250-1500	PIN
8	404-2504	TARGET ARMATURE & RIVET ASS'Y
9	#5301	BRASS WASHER
10	#5428	SPLIT TYPE LOCKWASHER
11		#10-32 x 3/8 LG. BRASS R.H.M.S.
12	K-27-800	COIL COMPLETE

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

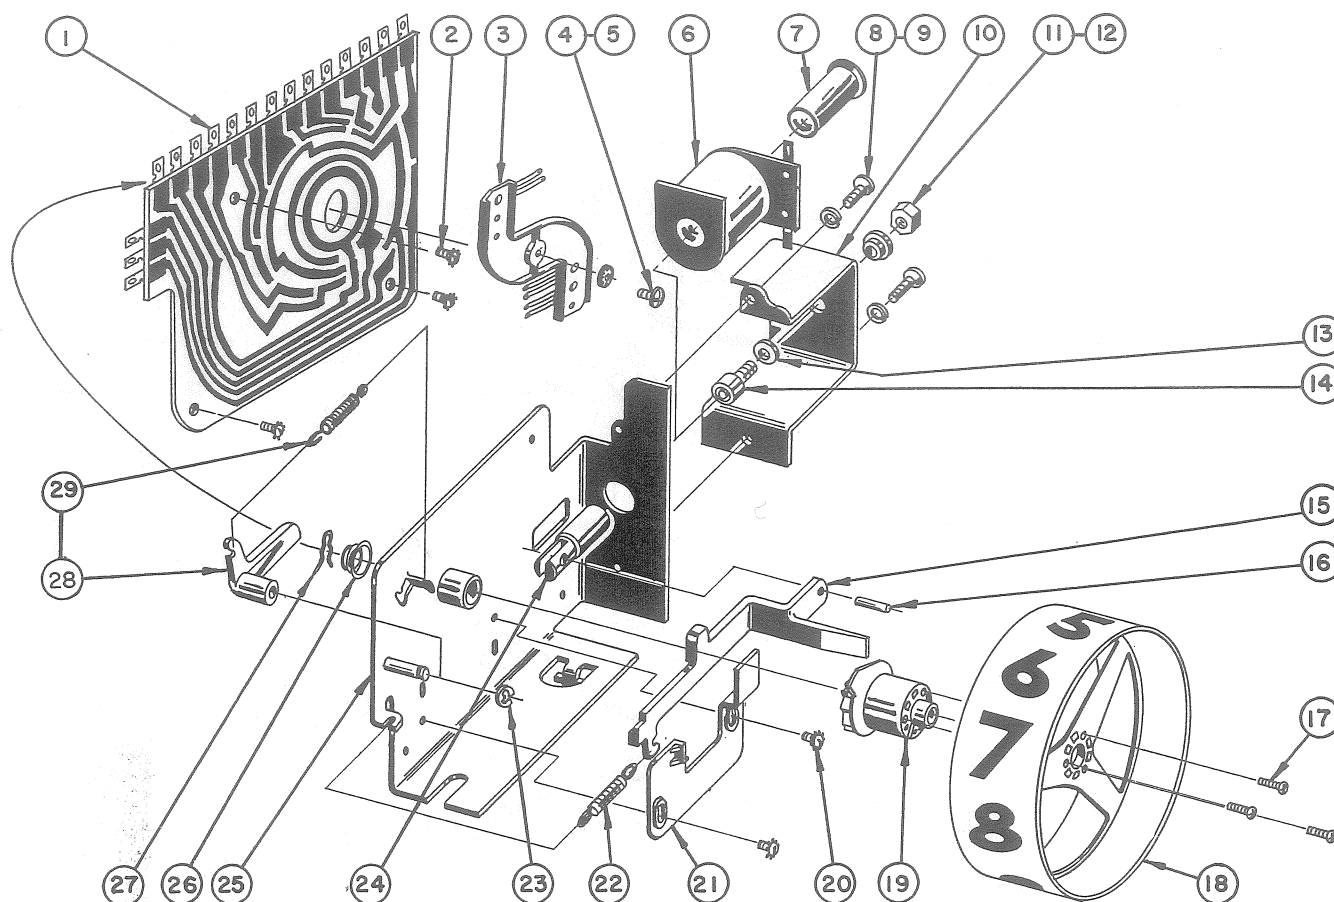

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	500-2565-A	COMPLETE SCORING UNIT	15	500-802-A	OPERATING ARM
1	500-2520	CONTACT PLATE ASS'Y	16	#6811	ROLL PIN
2		#6-32 x 1/4 LG. SEMS UNIT	17		#4 x 3/8 LG. TYPE "Z" PHILLIP
3	500-2521	WIPER FINGER ASS'Y			HD. SELF TAPPING SCREW
4		#6-32 x 3/8 LG. TYPE "F" PHILLIP	18	500-800-WB	DRUM
		HD. SELF TAPPING SCREW	19	500-801	CAM & RATCHET
5	#5476	SHAKEPROOF LOCKWASHER	20		#6-32 x 3/16 LG. SEMS UNIT
6	N-24-700X	COIL COMPLETE	21	500-805	ADJUSTABLE STOP
7	143-808	PLASTIC TUBING	22	300-901 A OR B	SPRING
8		#8-32 x 3/8 LG. TYPE "F" PHILLIP	23	#6737	E RING .187
		HD. SELF TAPPING SCREW	24	300-1500	OPERATING PLUNGER
9	#5427	SPLIT LOCKWASHER	25	500-2501-B	MOUNTING PLATE SUB ASS'Y
10	500-2508	COIL MTG. BRACKET	26	300-903	SPRING
11		#10-32 ELASTIC STOP NUT	27	300-902	RETAINING SPRING
12	500-1501	PLUNGER STOP BUSHING	28	500-804	HOLDING PAWL
13	#5322	BRASS WASHER	29	130-904	SPRING
14	500-2507	PLUNGER STOP & SLUG ASS'Y			

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

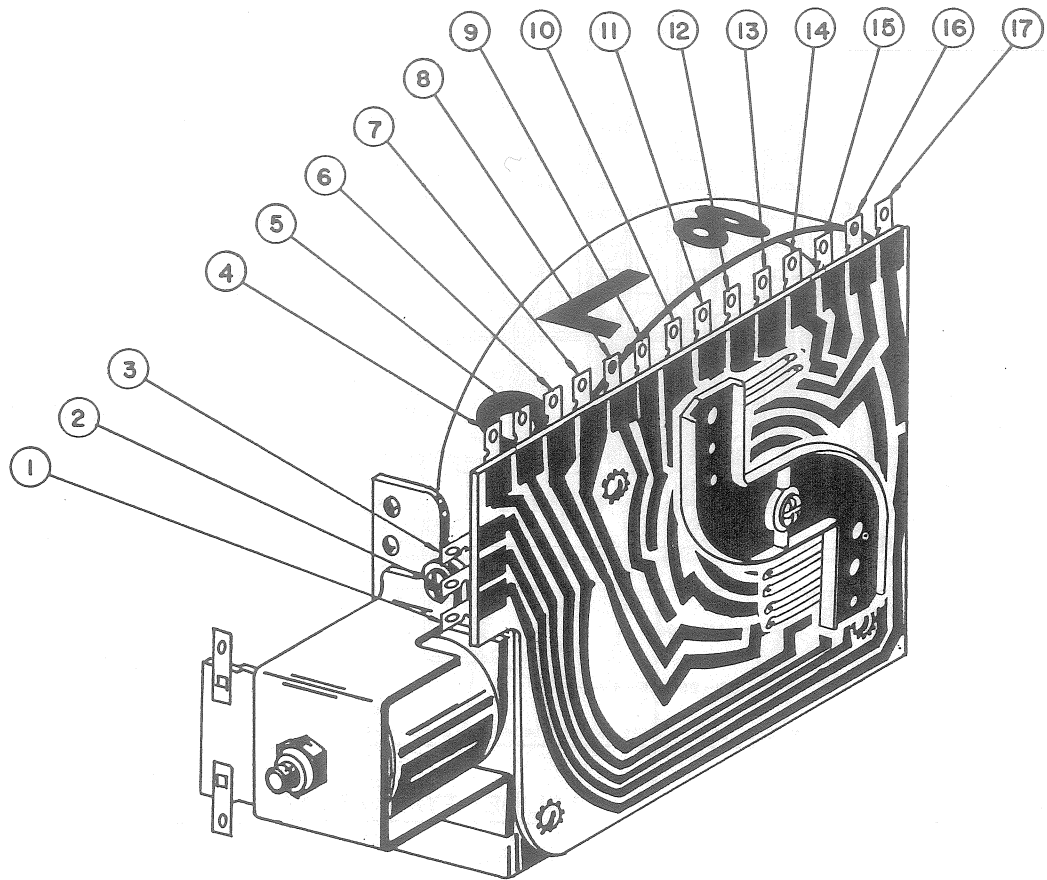

1. #7 PAD
2. COMMON FOR ALL PADS
3. #6 PAD
4. } CIRCUIT FOR RETURNING DRUM
5. } UNIT TO ZERO POSITION
6. #0 PAD
7. #9 PAD
8. #3 PAD
9. #2 PAD
10. #1 PAD
11. #5 PAD
12. } SERIES CIRCUIT ON ALL DRUM UNITS TO
13. } COMPLETE CIRCUIT TO SLIDE BANK RESET RELAY
14. TRANSFER CIRCUIT FROM ONE DRUM
15. UNIT TO ANOTHER IF USED
16. #4 PAD
17. #8 PAD

CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG


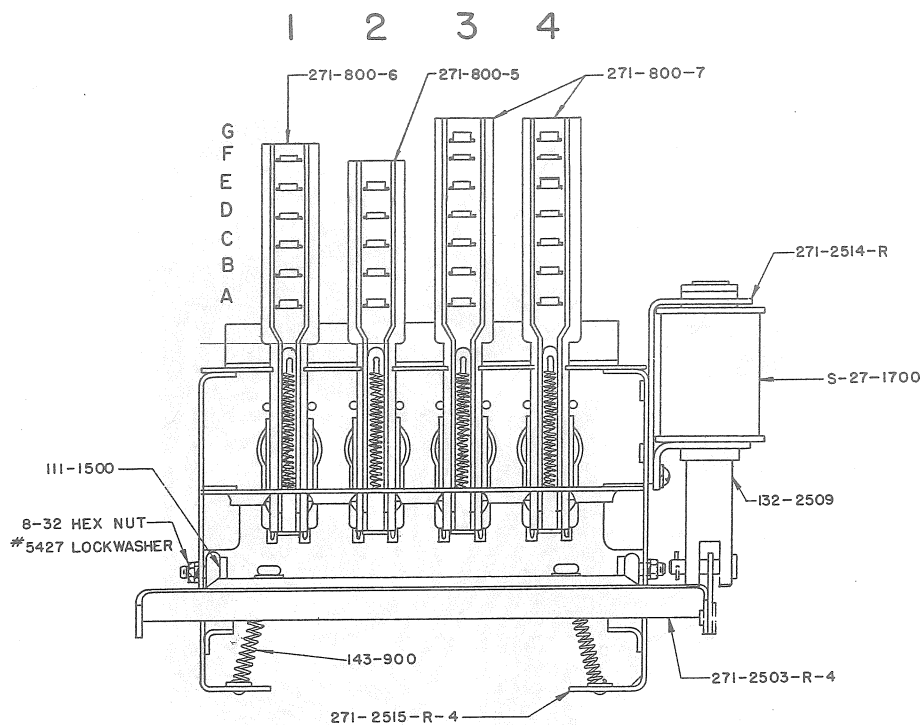


COMPLETE SLIDE TYPE RELAY 404-271-2520-R-4

CONTACT SWITCHES


SLIDE NO.1	SLIDE NO.2	SLIDE NO.3	SLIDE NO.4
21	21	21	21
20	19	20	20
19	19	96	20
19	19	96	19
19	19C	76	19
20D		19	19
		20C	19D

SLIDE TYPE RELAY

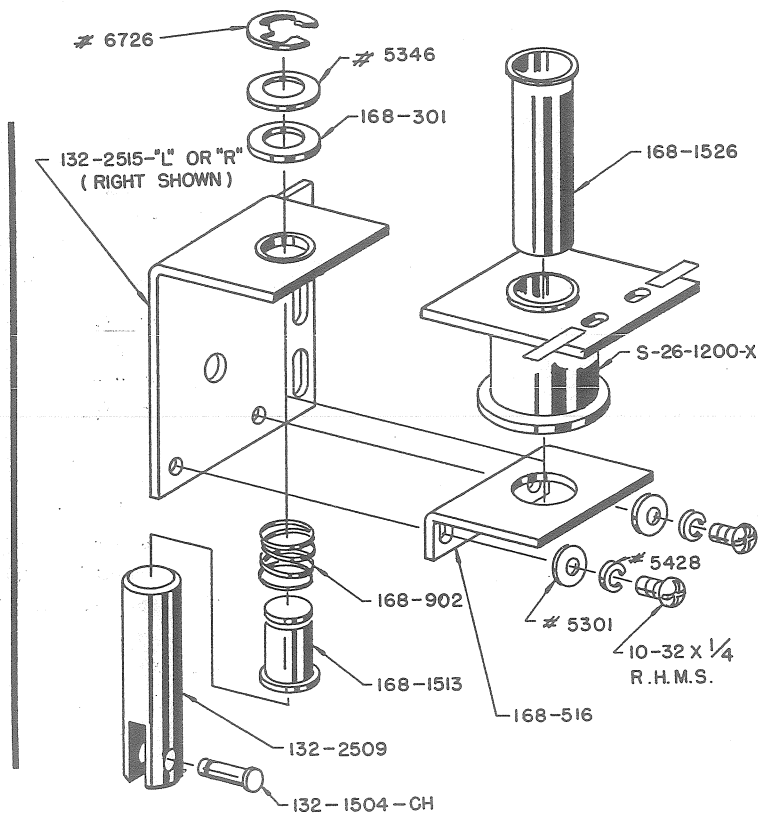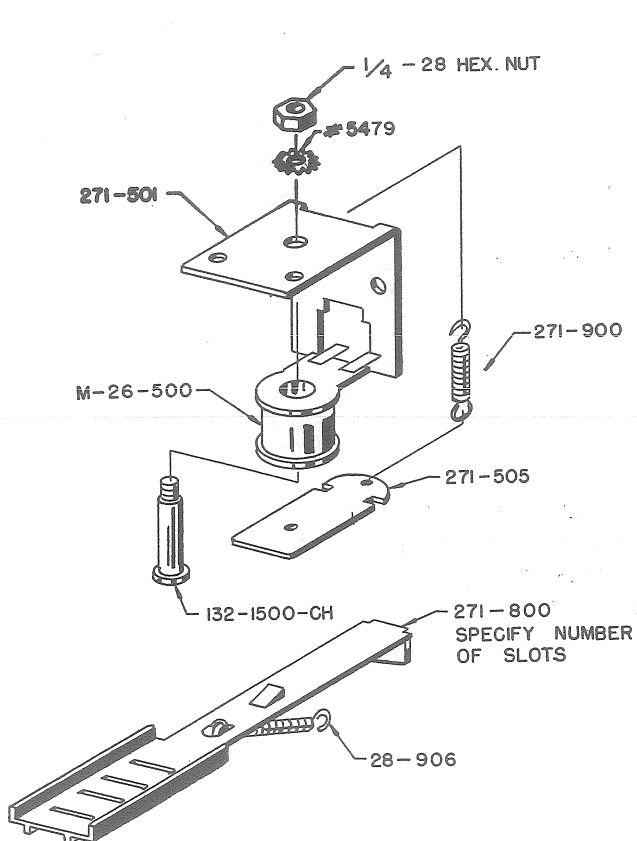

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

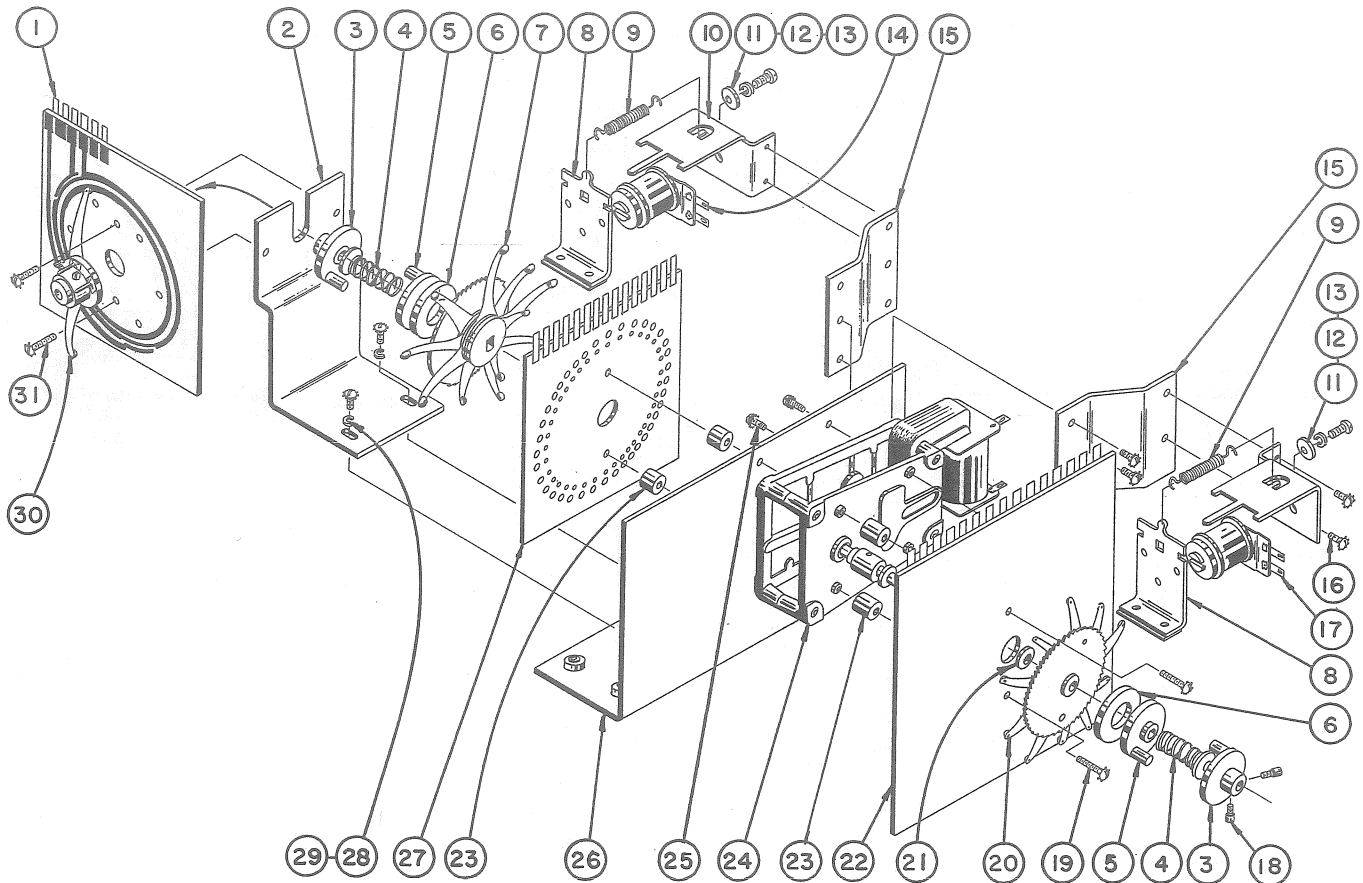

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	404-2509	FLASH-O-MATIC & MISS SHOT UNIT (COMPLETE)	17	K-28-1100	COIL COMPLETE
1	392-2504-A	CONTACT PLATE ASS'Y (MISS SHOT)	18		#8-32 x 1/2 LG. SLOTTED HEX HD. SET SCREW
2	404-510	P.C. MOUNTING BRKT. (MISS SHOT)	19		#8-32 x 3/4 LG. R.H.M.S.
3	176-2504	FRICTION PLATE DRIVER		#5477	EXTERNAL SHAKEPROOF LOCKWASHER
4	322-901	CLUTCH SPRING	20	392-2535	RATCHET & FINGER ASS'Y
5	176-2505	FRICTION PLATE	21	#5330	BRASS WASHER
6	176-300	CORK WASHER	22	392-2505	CONTACT PLATE ASS'Y (FLASH-O-MATIC)
7	404-2522	BULLS HEAD WIPER FINGER & RATCHET ASS'Y	23	102-1502	SPACER
8	176-2509	ARMATURE	24	404-2512	FLASH-O-MATIC, MISS SHOT MOTOR & BUSHING ASS'Y
9	129-902	SPRING	25		#8-32 x 3/8 LG. SEMS UNIT
10	129-2520-R	FRAME & EYELET ASS'Y	26	392-528	MOTOR MTG. PLATE
11	#5301	FLAT WASHER	27	404-2523	FLASHING BULLS HEAD CONTACT PL. ASS'Y
12	#5428	SPLIT TYPE LOCKWASHER	28	#5427	SPLIT TYPE LOCKWASHER
13		#10-32 x 3/8 LG. BRASS R.H.M.S.	29		#8-32 x 1/4 LG. SEMS
14	K-28-1000	COIL COMPLETE	30	404-2520	MISS SHOT WIPER FINGER ASS'Y
15	176-502	RELAY MTG. BRACKET	31		#8-32 x 1/4 LG. SEMS UNIT
16		#6-32 x 1/4 LG. SEMS UNIT			

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

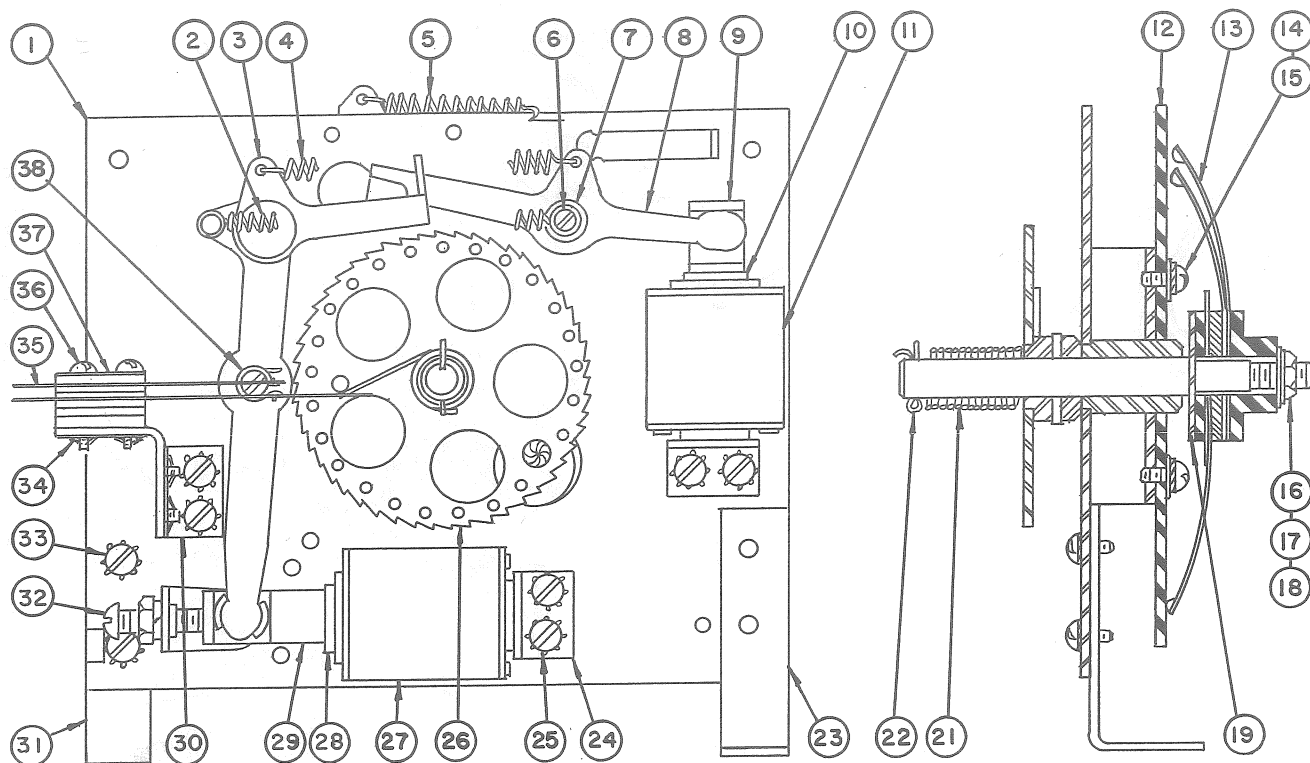

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
1	130-2502	MOUNTING PLATE ASS'Y	21	#6754	COTTER PIN
2	130-910-18	SPRING	22	130-560-AS	MOUNTING LEG
3	130-2511	OPERATING ARM ASS'Y	23	130-2516	PLUNGER STOP ASS'Y
4	130-901	SPRING	24		#6-32 x 1/4 LG. SEMS UNIT
5	130-904	SPRING	25	130-2542-25	RATCHET & POST ASS'Y
6	130-1510	RESET ARM POST	26	J-22-550	STEP-UP COIL
7	130-1517	RESET ARM BUSHING	27	130-1535	STEP-UP SOLENOID TUBING
8	130-2513	RESET ARM ASS'Y	28	91-1538	STEP-UP PLUNGER
9	91-1507	RESET PLUNGER	29	130-511	DOUBLE CONTACT BRACKET
10	91-1509	RESET SOLENOID TUBING	30	#5428	LOCKWASHER
11	H-26-650	RESET COIL	31	130-560-A	MOUNTING LEG
12	373-2510-C	CONTACT PLATE ASS'Y	32		#10-32 x 7/8 LG. BRASS R.H.M.S.
13	379-2529	WIPER FINGER ASS'Y	33		#8-32 x 1/4 LG. SEMS UNIT
14		#6-32 x 3/8 LG. SEMS UNIT	34	#6770	TINNERMAN NUT
15	#5305	PLAIN WASHER	35	#46	3 SPACER BLOCK SWITCH ASS'Y
16		1/4-28 HEX NUT	36		#4 S.M.S. LENGTH AS REQUIRED
17	#5428	LOCKWASHER	37	#6771	TINNERMAN SPACER
18	#5331	PLAIN WASHER	38	130-1508	OPERATING ARM POST
19	130-518	FINGER BACK-UP WASHER			
20	130-905	TORSION SPRING			

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

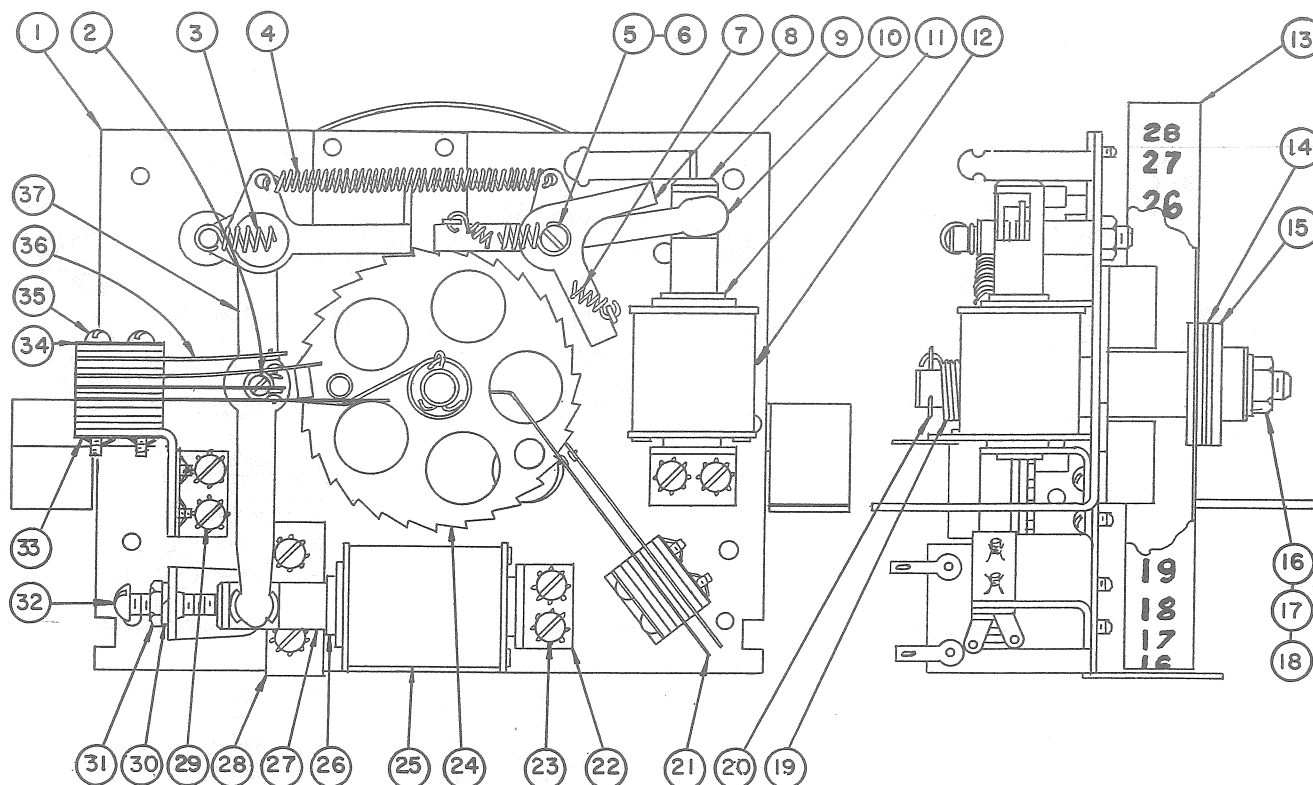

ITEM	PART NO.	DESCRIPTION	ITEM	PART NO.	DESCRIPTION
	130-2532-C	COMPLETE CREDIT UNIT	19	130-907	TORISON SPRING
1	130-2583	MOUNTING PLATE ASS'Y	20	#6754	COTTER PIN
2	130-1508	OPERATING ARM POST	21	#46	SWITCH ASS'Y
3	130-910-18	SPRING	22	130-2516	PLUNGER STOP ASS'Y
4	130-901	SPRING	23		#6-32 x 1/4 LG. SEMS UNIT
5	130-1510	RESET ARM POST	24	130-2579	SHAFT, BUSHING, RATCHET & STUD ASS'Y
6	130-1517	RESET POST BUSHING	25	J-22-550	COIL (STEP-UP)
7	128-900	SPRING	26	130-1535	STEP-UP SOLENOID TUBING
8	130-2514	ESCAPEMENT PAWL & BUSHING	27	130-1513	STEP-UP PLUNGER
9	130-1539	RESET PLUNGER	28	130-532	WINDOW BRACKET
10	130-2513	RESET ARM ASS'Y	29	130-511	DOUBLE CONTACT BRACKET
11	91-1509	RESET SOLENOID TUBING	30	#5428	LOCKWASHER
12	H-26-650	COIL RESET	31		#10-32 HEX NUT
13	130-2552	DRUM ASS'Y	32		#10-32 x 3/4 LG. BRASS R.H.M.S.
14		WASHER	33	#6770	TINNERMAN NUT
15	130-806	FINGER HUB	34	#6771	TINNERMAN SPACER
16		1/4-28 HEX NUT	35		#4 S.M.S. LENGTH AS REQUIRED
17	#5429	LOCKWASHER	36	128-80	SWITCH ASS'Y
18	#5331	PLAIN WASHER	37	130-2533	OPERATING ARM & POST ASS'Y


CHICAGO DYNAMIC INDUSTRIES

PARTS CATALOG

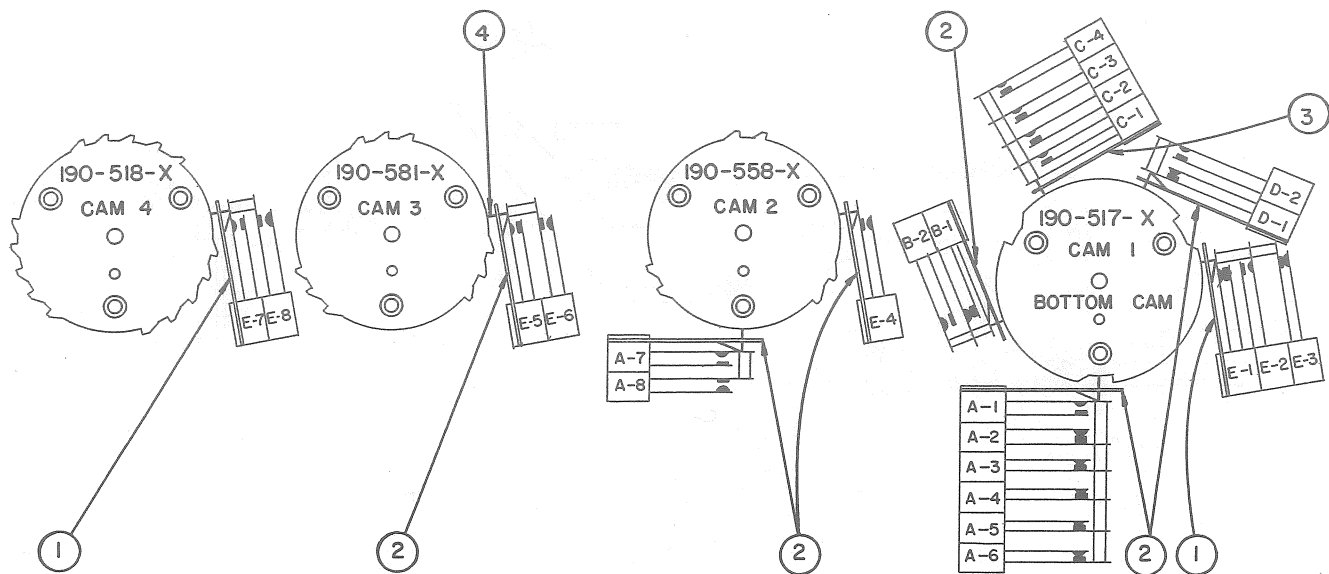


ITEM	PART NO.	DESCRIPTION
1	115-501-E	CAM RIDER PLATE
2	115-501-F	CAM RIDER PLATE
3	115-501-B	CAM RIDER PLATE
4	115-508	CAM RIDER ON ALL THE SWITCHES
A-1	#17	SWITCH ASSEMBLY
A-2	#57	SWITCH ASSEMBLY
A-3	#57	SWITCH ASSEMBLY
A-4	#64	SWITCH ASSEMBLY
A-5	#64	SWITCH ASSEMBLY
A-6	#64	SWITCH ASSEMBLY
A-7	#63	SWITCH ASSEMBLY
A-8	#326	SWITCH ASSEMBLY
B-1	#60	SWITCH ASSEMBLY
B-2	#325	SWITCH ASSEMBLY

ITEM	PART NO.	DESCRIPTION
C-1	#62	SWITCH ASSEMBLY
C-2	#64	SWITCH ASSEMBLY
C-3	#64	SWITCH ASSEMBLY
C-4	#61	SWITCH ASSEMBLY
D-1	#17	SWITCH ASSEMBLY
D-2	#57	SWITCH ASSEMBLY
E-1	#17	SWITCH ASSEMBLY
E-2	#417	SWITCH ASSEMBLY
E-3		
E-4	#63	SWITCH ASSEMBLY
E-5	#63	SWITCH ASSEMBLY
E-6	#326	SWITCH ASSEMBLY
E-7	#63	SWITCH ASSEMBLY
E-8	#326	SWITCH ASSEMBLY

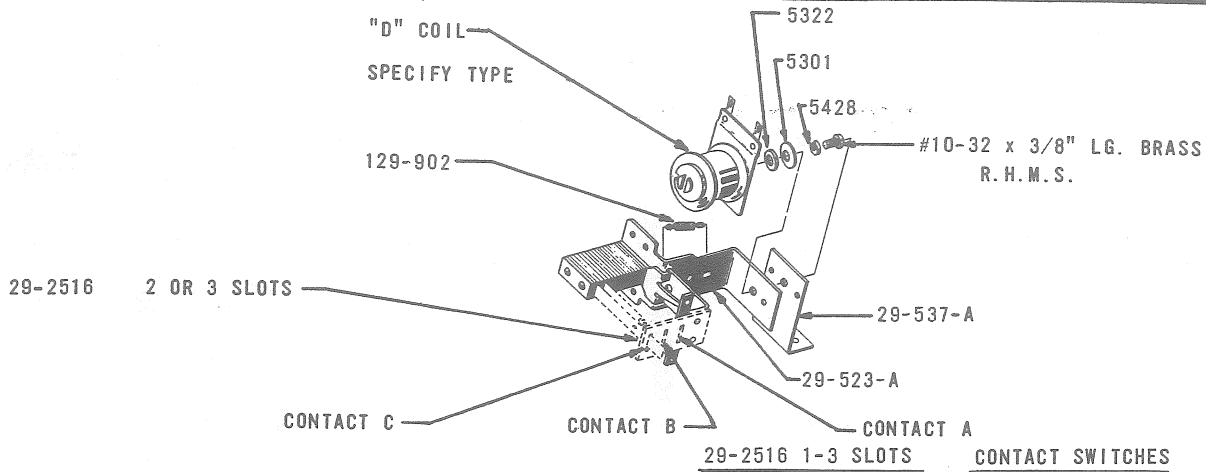

RELAY NAME	COIL	ARMATURE	CONTACT SWITCHES		
			A	B	C
MOVING TARGET SCORE CONT. RE. (3 REQ'D.)	D-28-1000	1 SLOT	M-27		
SCORE 10-90 RE.	D-28-1100	2 SLOTS	M-28	M-28	
SCORE 100-900 RE.	D-28-1100	3 SLOTS	M-28	M-28	M-28

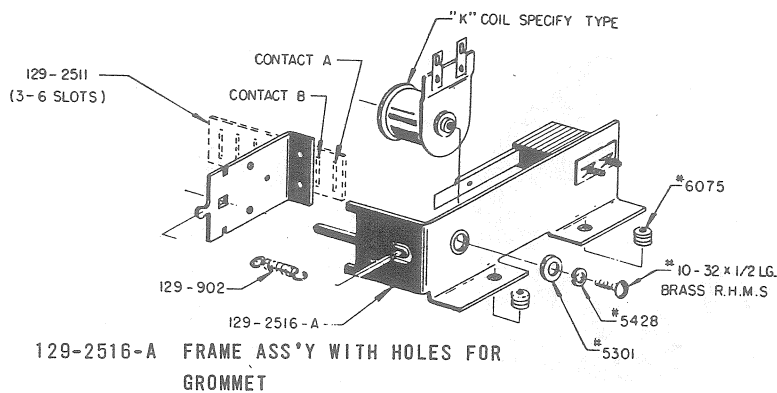

CONTACT SWITCH CODE


- M - CONTACT OPEN WHEN COIL IS NOT ENERGIZED.
 B - CONTACT CLOSED WHEN COIL IS NOT ENERGIZED.
 T - TRIPLE CONTACT

129-2516-B FRAME ASS'Y WITH HOLES FOR SCREWS


RELAY NAME	COIL	ARMATURE	CONTACT SWITCHES					
			A	B	C	D	E	F
ANTI-CHEAT RE.	K-29-1400	4 SLOTS	M-27	M-26	B-26	T-31		
BULLSEYE HIT RE.	K-28-1100	4 SLOTS	M-27	M-26	M-26	M-48		
BULLSEYE RE.	K-28-1200	4 SLOTS	M-26	M-26	T-31	M-26		
CREDIT RESET RE.	K-28-1100	4 SLOTS	M-27	M-26	M-26	M-26		
DROP TARGET HIT RE.	K-28-1100	3 SLOTS	M-27	M-26	M-26			
EXTENDED PLAY LITE RE.	K-28-1200	3 SLOTS	M-27	M-26	M-31			
FLASHING BULLS HEAD CONTROL RE.	K-28-1200	3 SLOTS	M-26	B-28	B-27			
FLASHING BULLS HEAD RE.	K-28-1200	4 SLOTS	M-26	M-26	M-34	M-26		
FLASHING BULLS HEAD HIT RE.	K-28-1200	5 SLOTS	M-27	M-26	M-34	B-26	M-26	
MOVING TARGET HIT RE.	K-28-1000	5 SLOTS	M-27	M-26	M-26	M-26	M-48	
SLIDE BANK RESET RE.	K-28-1100	6 SLOTS	M-27	M-26	M-34	T-31	M-26	M-48
TRIGGER RE.	K-28-1100	5 SLOTS	T-30	M-26	M-34	M-48	M-48	
10 ϕ RELAY	K-28-1100	4 SLOTS	M-27	M-26	M-26	B-26		
25 ϕ RELAY	K-28-1100	5 SLOTS	M-27	M-26	M-34	M-26	B-26	

CHICAGO DYNAMIC INDUSTRIES


PARTS CATALOG

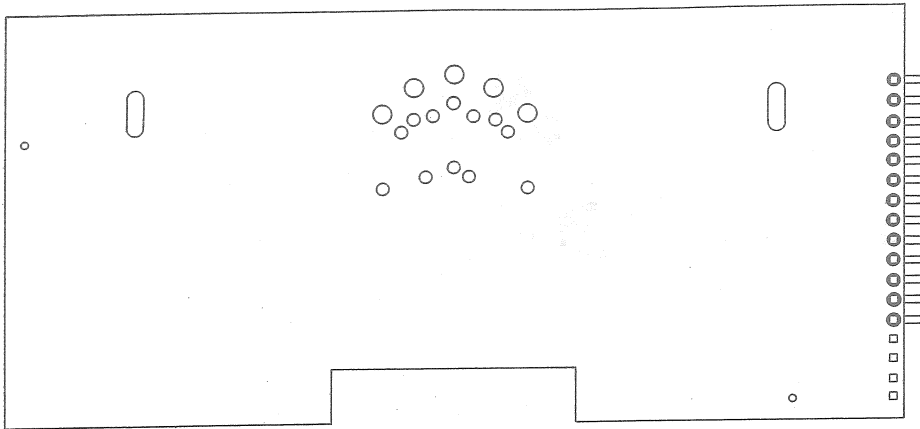


SCANNING DISC.
 PLATE 404-2519
 STYLUS POINT 254-1512-A

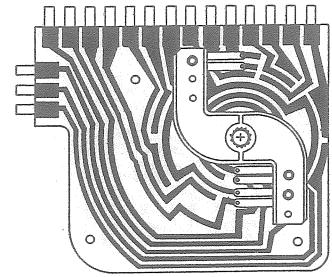


COUNTER SWITCH
 PLATE 500-2520
 FINGER 500-2519

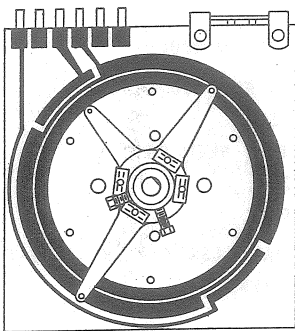

MISS SHOT PRINTED CIRCUIT
 PLATE 392-2504-A
 FINGER 404-2520

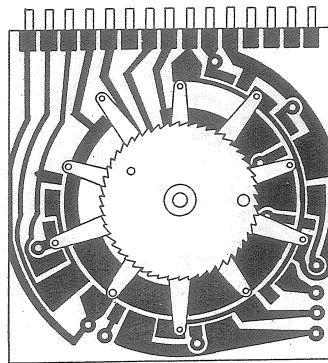

FLASH-O-MATIC PRINTED CIRCUIT
 PLATE 392-2505
 FINGER 392-2535

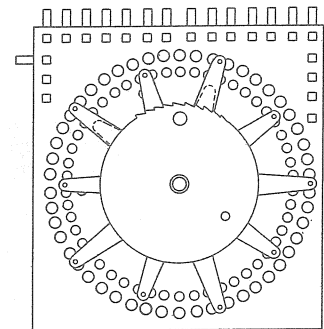

FLASHING BULLS HEAD TARGETS
 PLATE 404-2523
 FINGER 404-2522






PLATE 404-2517



MOVING TARGET CONTACT PLATE



FINGER 404-2507

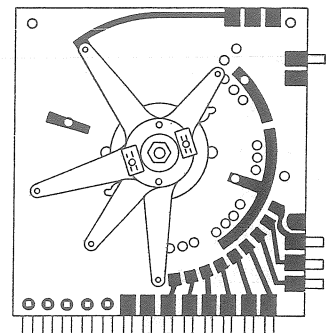






SHOT COUNT CONTACT PLATE
 PLATE 373-2510-C
 FINGER 379-2529

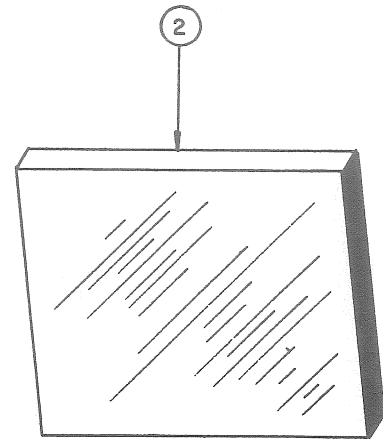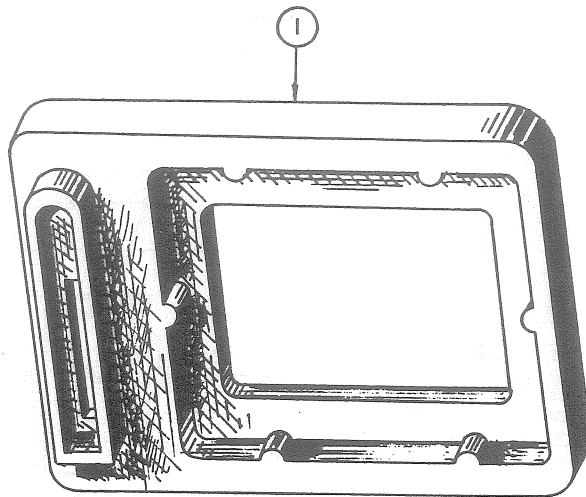

ITEM	PART NO.	DESCRIPTION
1	382-800	COIN ENTRY MOLDING (SPECIFY OPENING)
2	326-305-A	COIN DENOMINATION WINDOWS (2 NICKELS - 1 PLAY SPECIFY)
	326-305-B	(10¢ - 1 PLAY)
	326-305-C	(25¢ - 3 PLAYS)
	326-305-D	(5¢ - 1 PLAY)
	326-305-E	(25¢ - 5 PLAYS)
	326-305-F	(25¢ - 6 PLAYS)
	326-305-G	(10¢ - 2 PLAYS)
	326-305-H	(3 NICKELS - 1 PLAY)
	326-305-J	(1 DIME & 1 NICKEL - 1 PLAY)
	326-305-K	(1 QUARTER - 2 PLAYS)
	326-305-L	(25¢ - 2 PLAYERS)
	326-305-M	(2 DIMES - 2 PLAYERS)
	326-305-N	(10¢ - 2 PLAYERS)
	326-305-O	(10¢ - 1 PERIOD)
	326-305-P	(25¢ - 3 PERIODS)
	326-305-Q	(25¢ - 1 PLAY)
	326-305-R	(25¢)
	326-305-S	(25¢ - 4 PLAYS)
	326-305-T	(1 QUARTER - 1 PLAY)
	326-306-A	(2 x 10 PFENNING - 1 PLAY) (GERMAN)
	326-306-B	(50 PFENNING - 3 PLAYS) (GERMAN)
	326-306-C	(1 D.M. - 6 PLAYS) (GERMAN)
	326-307-A	(50 LIRE - 1 PLAY) (ITALY)
	326-307-B	(100 LIRE - 2 PLAYS) (ITALY)
	326-308-A	(2 x 25 ORE - 1 PLAY) (SWEDISH)
	326-308-B	(1 KRONE - 3 PLAYS) (SWEDISH)
	326-308-C	(50 ORE - 1 PLAY) (SWEDISH)


ITEM	PART NO.	DESCRIPTION
	326-309-A	(2 x 10 YEN - 1 PLAY) (JAPANESE)
	326-309-B	(50 YEN - 3 PLAYS) (JAPANESE)
	326-309-C	(50 YEN - 1 PLAY) (JAPANESE)
	326-309-D	(100 YEN - 3 PLAYS) (JAPANESE)
	326-310-A	(1/2 FRANC - 1 PLAY) (FRENCH)
	326-310-B	(1 FRANC - 3 PLAYS) (FRENCH)
	326-310-C	(1 FRANC - 4 PLAYS) (FRENCH)
	326-310-D	(1 FRANC - 1 PLAY) (FRENCH)
	326-310-E	(2-20 CENTIMES - 1 PLAY) (FRENCH)
	326-310-F	(100 FRANC - 1 PLAY) (FRENCH)
	326-310-G	(50 CENTIMES - 1 PLAY) (FRENCH)
	326-310-H	(1 FRANC - 2 PLAYS) (FRENCH)
	326-311-A	(6d - 1 PLAY) (BRITISH)
	326-311-B	(ONE SHILLING - 1 PLAY) (BRITISH)
	326-311-C	(TWO SHILLINGS - 2 PLAYS) (BRITISH)
	326-311-D	(TWO SHILLINGS - 4 PLAYS) (BRITISH)
	326-311-E	(ONE SHILLING - 3 PLAYS) (BRITISH)
	326-312-A	(1 DINAR - 2 PLAYS) (YUGOSLAVIA)
	326-312-B	(50 PARA - 1 PLAY) (YUGOSLAVIA)
	326-312-C	(1 DINAR - 1 PLAY) (YUGOSLAVIA)
	326-313-A	(1 SPEL - 25¢) (HOLLAND)
	326-313-B	(1 GULDEN) (4 SPELEN) (HOLLAND)
	326-315	(1 KRONA - 1 PLAY) (SWEDISH)
	382-301-A	(1 QUARTER - 2 PLAYS)
	382-301-B	(1 QUARTER - 3 PLAYS)
	382-301-C	(1 DIME & 1 NICKEL - 1 PLAY)
	382-301-D	(3 NICKELS - 1 PLAY)
	382-301-E	(10¢ - 1 PLAY)
	382-301-F	(2 NICKELS - 1 PLAY)

404-2526-A (1 CONNECTOR)
404-2526-2-A&B (2 CONNECTORS)

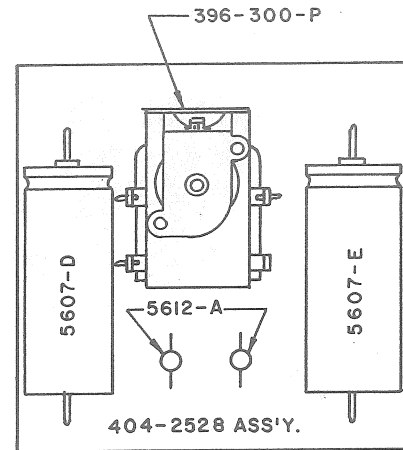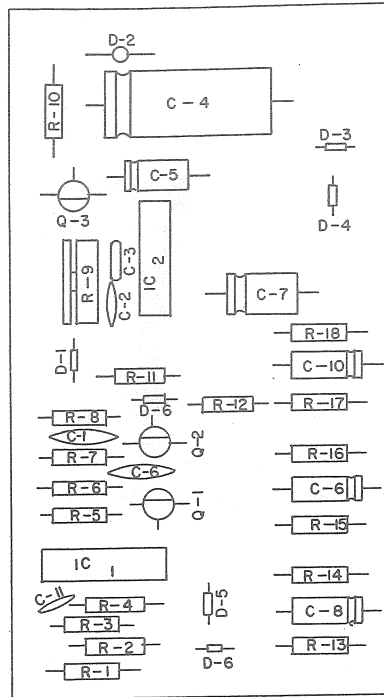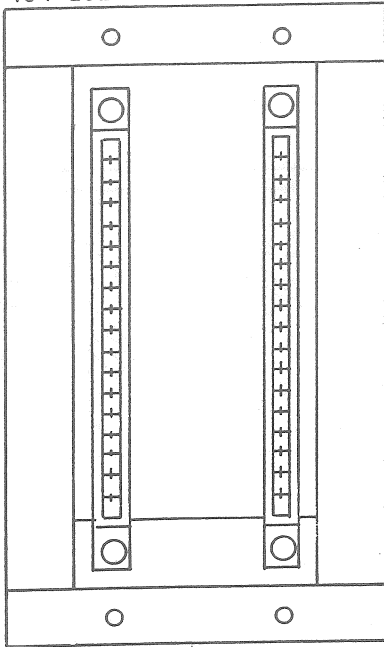

ITEM	DESCRIPTION
R1	10K
R2	100K
R3	100K
R4	10K
R5	1K
R6	47K
R7	10K
R8	47K
R9	10K
R10	47K
R11	10K
R12	100K
R13	100K
R14	100K
R15	100K
R16	100K
R17	100K
R18	250K
C1	.0068MFD
C2	.0068MFD
C3	5MFD
C4	500MFD
C5	5MFD
C6	5MFD
C7	5MFD
C8	.01MFD
C9	25MFD
C10	.003MFD
D1	1A170H
D2	1A170H
D3	1A170H
D4	1A170H
D5	1A170H
D6	1A170H
D7	1A170H
D8	2N339A
D9	2N339A
D10	2N339A
D11	URL747
D12	URL105005

ALL RESISTORS ARE
1/2 WATT 10%

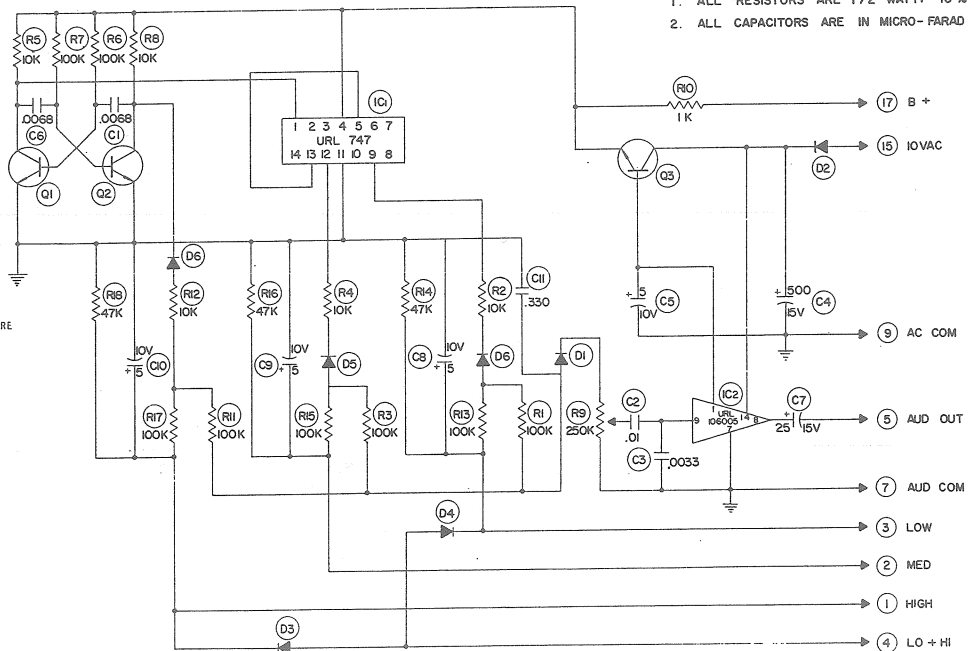

NOTES:-

1. ALL RESISTORS ARE 1/2 WATT, 10%
2. ALL CAPACITORS ARE IN MICRO-FARAD

